

# TARGETTI

## DMLE2882242UD

DRIVER 288W AC 110-277V 50/60HZ 24VDC 5/1 DIM

### Transformer

Dimmable with triac forward and reverse phase, 0/1-10V, resistor, PWM. Temperature class B(130°C)

Input leads are 18AWG 600V

Output leads are 16AWG 300V

Leads max. operational temperature is 105°C

### Housing

The actual transformer 288W is encapsulated in the enclosure

The enclosure is Black Powder Coated Steel, NEMA 3R rated

Wiring compartment has 8 knockouts sizes for 3/4 inch screw cable connectors

Enclosure Temperature does not exceed 70°C at 45°C ambient and fully loaded

Dimensions (inch): L = 10.94, W = 5.04, H = 1.81

Weight (LBS): 4.4







### Electrical Parameters

Input Voltage:	<b>110-277V 50/60Hz</b>	
Max. input current at full load:	<b>3A</b>	
Output voltage without load:	<b>24.1VDC</b>	
Output voltage fully loaded:	<b>24VDC</b>	
Max. Total Wattage:	<b>288W</b>	Max. per circuit: <b>96W</b>
Max. Output Current:	<b>4A</b>	per circuit.
Efficiency:	<b>90%</b>	
Load regulation:	<b>1%</b>	
Ripple:	<b>5%</b>	



Conforms to UL STD. 8750 and 1310  
Certified to CSA STD. C22.2 No 250.13  
E498696 model MLE288C2-24DC-UD

PRODUCT CODE	DIMENSIONS	BODY THICKNESS (ga.)	COVER THICKNESS (ga.)	FINISH	WATTAGE	KNOCKOUT PATTERN
DLME2882242UD	10.94 x 5.04 x 1.81 in.	17	17	Powder Coated Black	288	A-B-C-D-E-F-G-H

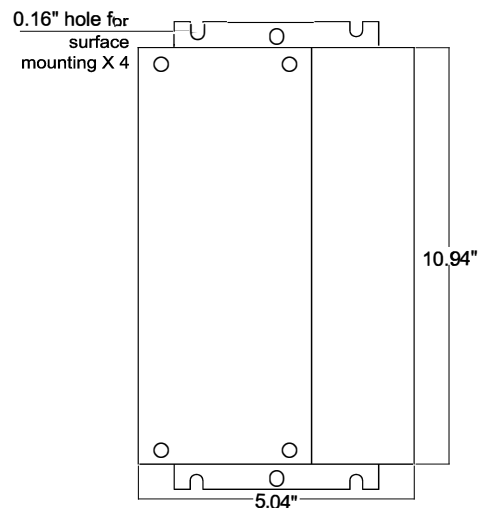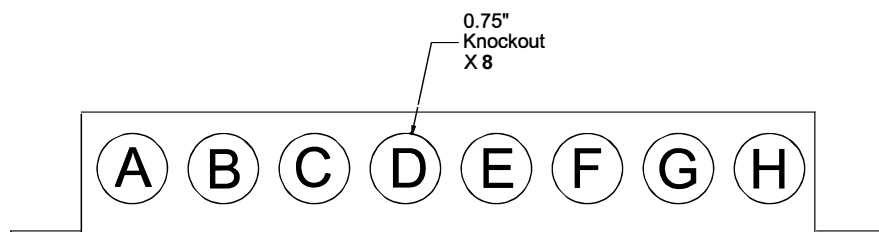


### Wiring Diagram For MLE Driver Series

### Installation Instruction



- \* Read instructions completely before installation.
- \* Turn off electricity before wiring.
- \* Only qualified personal should install the unit.
- \* Installation must comply with the NEC.
- \* Ensure the unit has input, Output voltage and output wattage proper for your application.

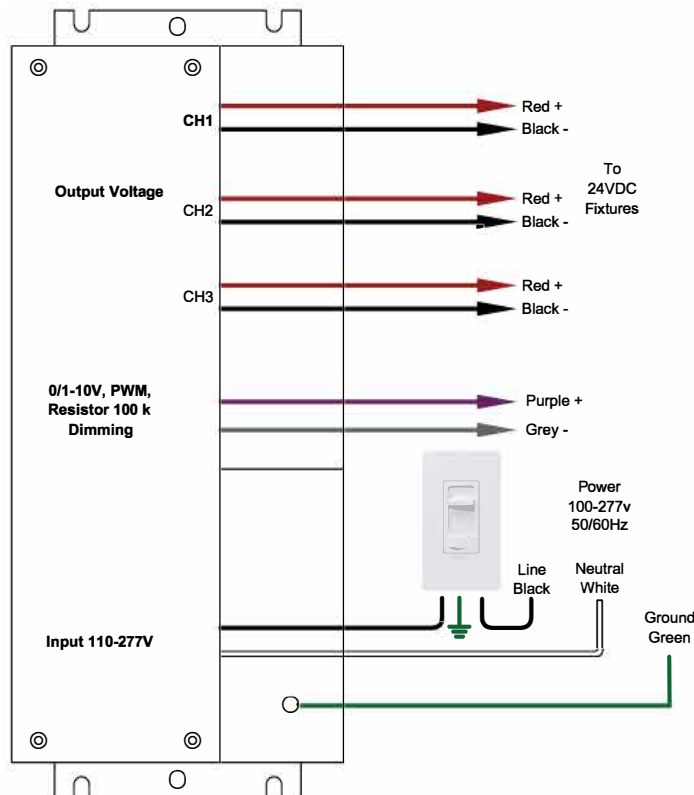

#### Mounting

The transformer must be mounted in at least 5" of a free flow air space for proper ventilation.

The transformer must never be mounted next to or above heat radiated objects.

The maximum ambient temperatures should not exceed 45 deg. C (115 deg. F) at full load.

#### Connection

Open the wire compartment and remove knockouts for input and output, install strain reliefs (wire clamps).

Use only right size and UL approved wire nuts.

#### Input Connection

Bring your line and neutral wires through input strain relief and connect them to Black and White transformer leads.

#### Dimming

If you are going to use dimmer, connect it as diagram.

If you are going to use 0/1-10V, PWM dimmer or resistor, connect it to Purple - and Gray +. You power connect directly to the driver.

#### Output Connection

Bring your lights wires through output strain relief and connect to the Red + and Black - transformer leads.

**Make sure all your connections are tight and secure.**

#### Grounding

The LED driver is grounded to the enclosure.

The enclosure in turn should be grounded in accordance with NEC and local code.

Connect the transformer Green wire to the ground.