



- Socket E26 & GU10
- 48 ft. Spools
- 48 Sockets for 12" OC
- 24 Sockets for 24" OC
- Max5W/Socket 120V AC 60Hz
- Linkable to other Duraled Cable
- Rated IP44 for outdoor

CAUTION: THIS FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN.


INSTALLER MUST SUSPEND THE DURALED CABLE PROPERLY BY ATTACHING THE SUSPENSION CABLE (SOLD SEPARATELY) ONTO SOLID STRUCTURES SUCH AS STUDS, POLES OR EVEN CONCRETE WALLS. LIGHT SOCKETS MUST BE SUSPENDED SO THAT THE BULBS ARE FACING DOWNWARDS ONLY.

AVOID DAMAGE TO THE INSULATION DURING INSTALLATION. DO NOT PIERCE OR OTHERWISE COMPROMISE WIRE OR SOCKET OUTER COVERING, JACKET OR SHEATHING. PERIODICALLY INSPECT WIRE AND SOCKETS FOR ANY ISSUE DUE TO WEATHER OR UV LIGHT OR ANY OTHER DAMAGE.

SUITABLE FOR OUTDOOR AND INDOOR USE.

If in doubt about the symbols please refer to catalog or website

Each spool of Duraled Cable features 1 ea. male plug at 5 ft. from the first socket and 1 ea. female plug at 2 ft. from the last socket.

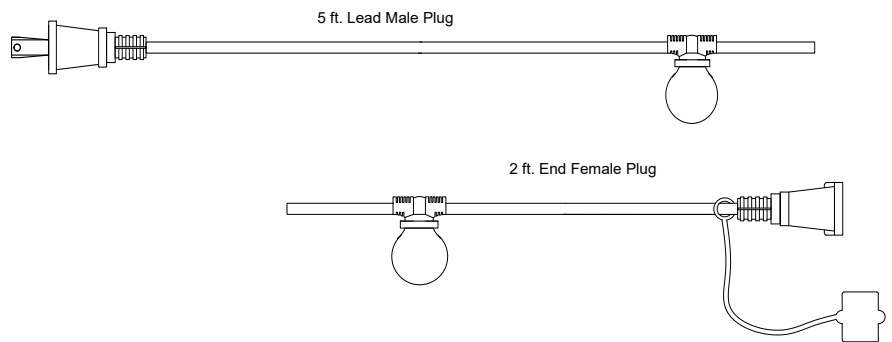

MOUNTING DIAGRAM

