





Mr. SMITH

CODE: MRSW41-

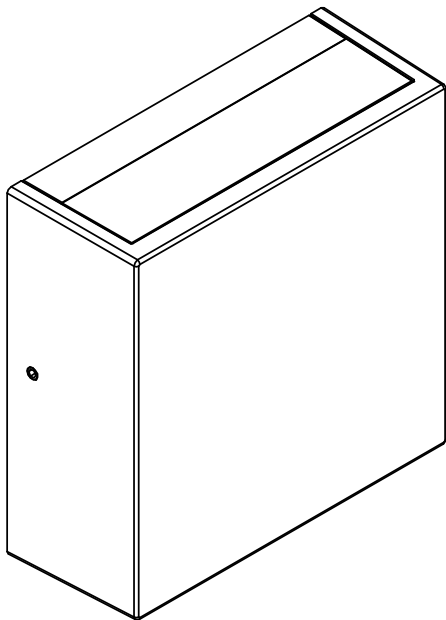

If in doubt about the symbols
refer to catalog or website

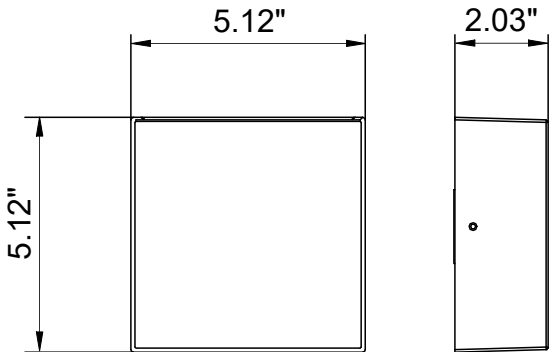

K 5 FB-B;

To ensure maximum efficiency of the
product, read the following instructions
thoroughly prior to installation.



This fixture must be installed by a licensed
and qualified electrician. The installer must comply
with NEC and local building codes when
installing the fixture



Electrical current can cause painful shock,
serious injury, or even death. Make sure you
turn off the power supply, ground fixture(s), and
make sure all electrical connections are correct and
secured



This fixture must not be installed during rain, fog, or
high humidity



For use in IP65 installations.



Keep the label of the original packaging if any
eventual future claims are needed

IK08
IP65






Table of Contents


Packaging Contents
Installation Instructions
Maintenance / Support

Pg.2
Pg.2/3/4/5
Pg.6


Packaging contents

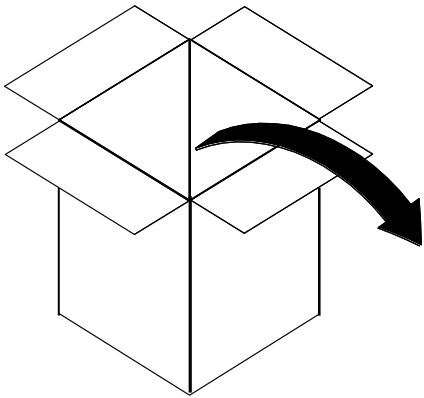

Box 7"x7"x4"



LED Fixture
1 ea.

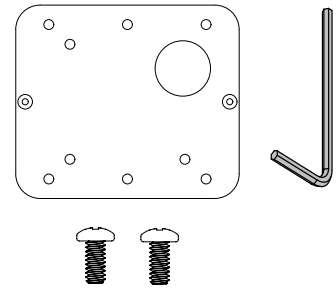


Mounting Kit -
Back mounting plate 1 ea.
Phillips pan head screws 2 ea.
2.5 mm Allen key 1 ea.



Fixture Installation

Prepare the LED fixture for Installation following these simple steps.

- Identify the area with J-box where the LED fixture will be installed.
- Using the 2.5mm Allen key (included) loosen the 2 set screws on the sides of the fixture, then remove the face cover from the fixture and put it a side, the fixture's face cover will be the last part to be installed.




2.5mm

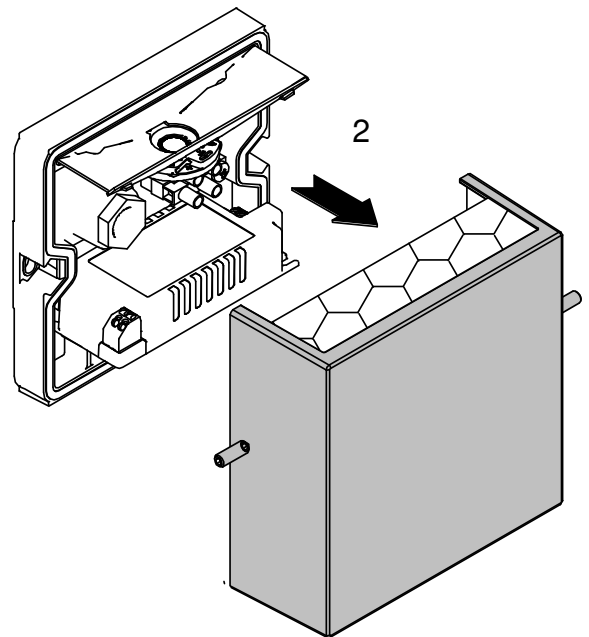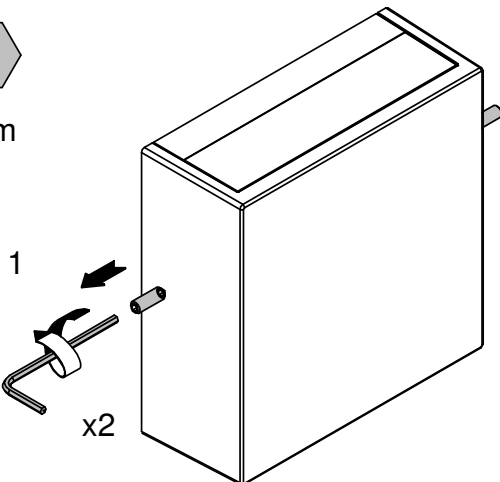

Fixture Installation Cont.

Install the LED fixture onto the recessed J-box on the wall.
Please continue to follow these steps below.

Insert wires through backplate's largest hole and proceed to make wire connections accordingly. Double check connections before fastening the Mr. Smith backplate.
Run a separate conduit for 0-10v dimming if applicable.

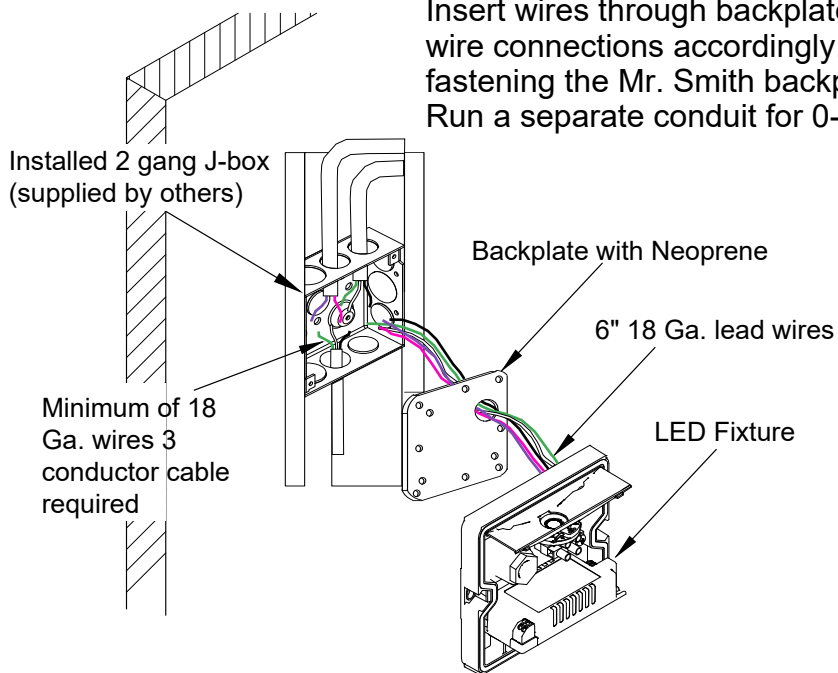

Wire Call outs


Black = line voltage

White = neutral

Green = ground

Purple = positive 0-10V



Pink = negative 0-10V

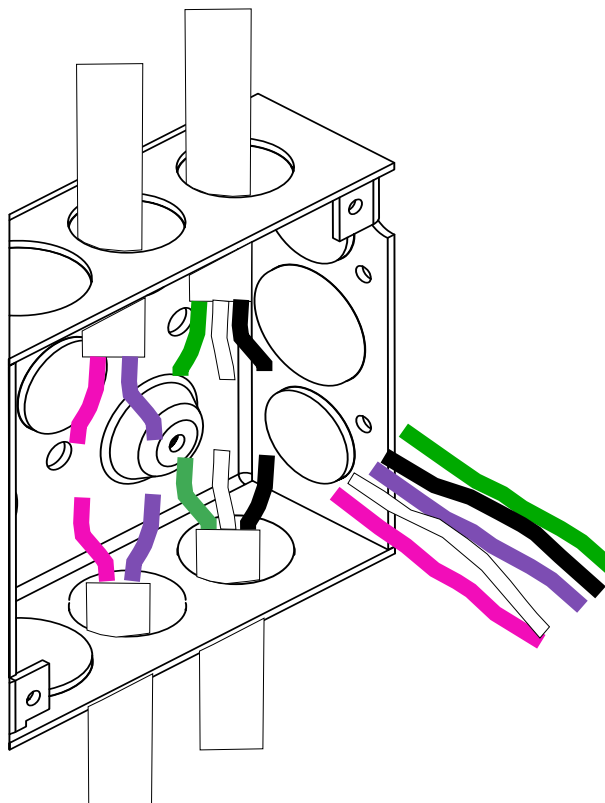

Fixture Installation Cont.

Fasten the fixture's backplate onto J-box using the screws provided with the 2 gang electrical recessed J-box and cut/grind any areas on the surface that might prevent the cover to be fastened correctly.

Once backplate/cover has been secured onto the J-box, proceed to insert the wires into the J-box prior to installing the LED fixture onto the backplate.

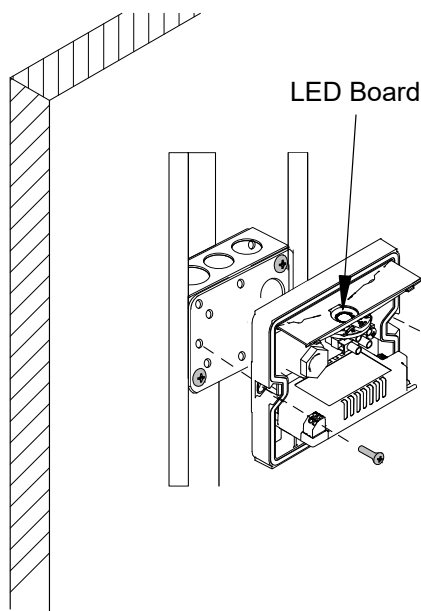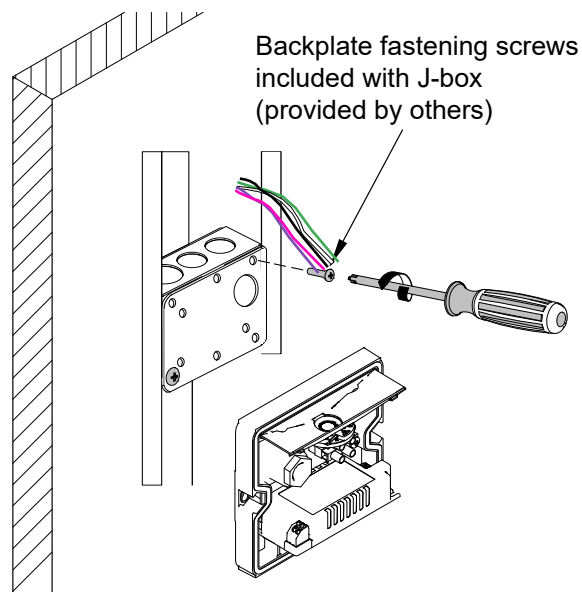


After fastening the backplate/J-box cover onto the recessed J-box, install the LED fixture using the 2 Phillips pan head screws provided with the mounting kit.


Simply align the 2 holes on the side of the fixture to the 2 **RED** threaded holes on the back plate, once aligned, level up the LED fixture, then drive in the screws and tighten.

Fixture Installation Cont.

After installing the LED fixture onto the backplate, please insert the face cover into the fixture and secure it with the 2 set screws.

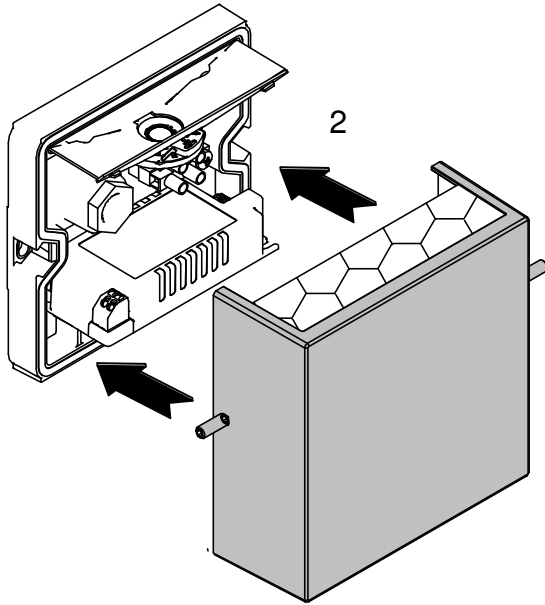

Apply just enough strength to force the face cover in

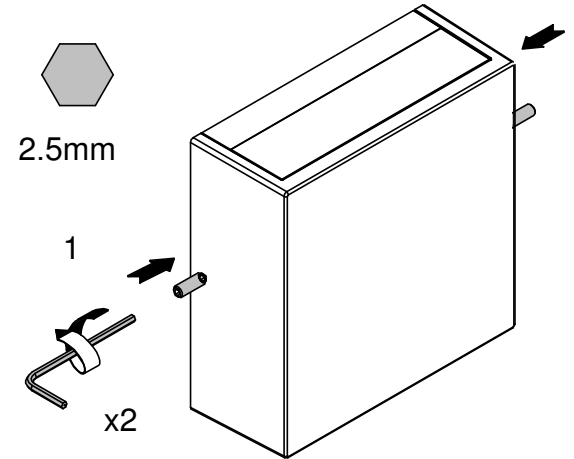

Holding the face cover in place, insert the set screws and tighten to complete the installation

Maintenance

This fixture was designed and manufactured for a durable, long lasting use with minimum care. To ensure the maximum lifespan of this product, we encourage our customers to provide a quality visual inspection of the fixture and installation accessories every six months. If there are any visible signs of issues (i.e moisture or dust) during the inspection, please clean any of the dust or moisture with a soft cloth and check to make sure that any of the fixtures are still operating normally. If there are any issues regarding the fixture please contact us as we will assist the situation at hand.

Support

Any questions, problems, or comments you have please feel free to contact our Customer Service department during our business hours Monday-Friday 8am-5pm via: Email: usaorders@targetti.com
Phone: (714) 513-1991

Visit our website: <http://www.targettiusa.com>