
Magnet Mounted Modular Light System



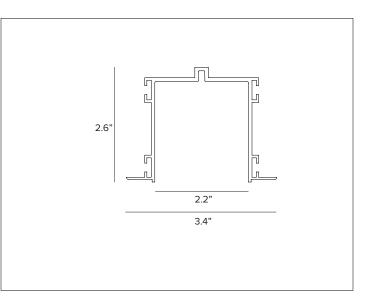

Professional magnet mounted low voltage modular light system allowing for maximum application flexibility.

O MECHANICAL CHARACTERISTICS

ferent mounting configu nnectors that make it po	Deep Black urations are achievable using joint pssible to build a simple or complex	
Plaster White ferent mounting configu nnectors that make it po	Deep Black urations are achievable using joint pssible to build a simple or complex	
ferent mounting configu nnectors that make it po	urations are achievable using joint possible to build a simple or complex	
nnectors that make it po	ossible to build a simple or complex	
Different mounting configurations are achievable using joint connectors that make it possible to build a simple or complex systems. To be completed with OZ 48V Power Rail for electrical connections.		
founting Recessed flanged profile for use in Non-Airtight installations. Profile system configurations are achieved through optional joir connectors.		
	5.6 lbs	
	, 5	

5 year limited warranty.


SPECIFICATION INFORMATION



O Plaster White Finish

Deep Black Finish

1 - PROFILE (REQUIRED)

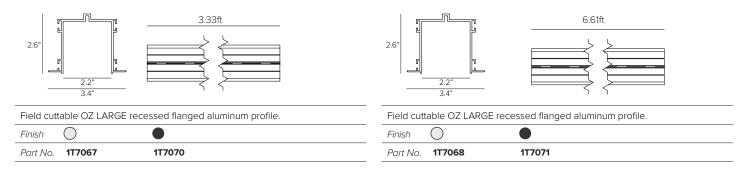

2 - END CAP (REQUIRED)



OZ LARGE recessed profile end cap kit, 2pcs.				
Finish	\bigcirc	•		
Part No.	1T7073	1T7074		


3 - SUPPORT BRACKET (REQUIRED)



OZ LARGE recessed profile steel installation support bracket. Suggested 2pcs for 3.33ft L and 3pcs for 6.61ft L profiles.

Part No. 1T7076

4 - JOINT CONNECTORS (OPTIONAL)

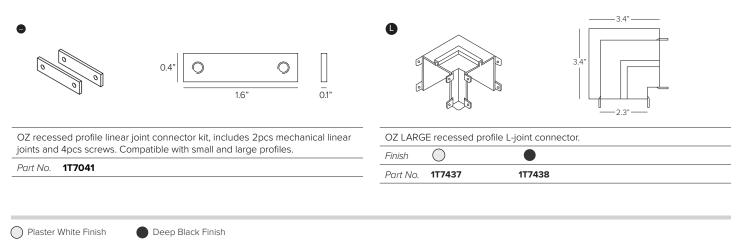

INSTALLATION DIAGRAMS

NOTE: Max of 4 connectors (excluding power feed) or 30ft or power rail per individual power supply.

RECESSED INSTALLATION

Power Rail + Recessed Profile

