
Magnet Mounted Modular Light System



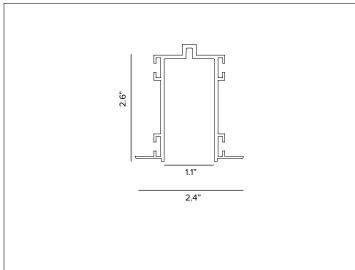

○, CONCEPT

Professional magnet mounted low voltage modular light system allowing for maximum application flexibility.

MECHANICAL CHARACTERISTICS

Dimensions	2.4"W x 2.6"H		
Materials	Extruded painted aluminum profile.		
Finish	O Plaster White Deep Black		
Functionality	Different mounting configurations are achievable using joint connectors that make it possible to build a simple or complex systems. To be completed with OZ 48V Power Rail for electrical connections.		
Mounting	Recessed flanged profile for use in Non-Airtight installations. Profile system configurations are achieved through optional joint connectors.		
Weight	3.28ft L: 2.5 lbs / 6.59ft L: 5 lbs		

WARRANTY

5 year limited warranty.

SPECIFICATION INFORMATION




39Ex: 1T7031 / 1T7039 / 1T7043


1-PROFILE	2 - END CAP	3 - MOUNTING	4 - JOINT CONNECTOR
REQUIRED	REQUIRED	REQUIRED	<u>OPTIONAL</u>

O Plaster White Finish Deep Black Finish

1 - PROFILE (REQUIRED)



Field cuttable OZ SMALL recessed flanged aluminum profile.					
Finish					
Part No.	1T7031	1T7034			




Field cuttable OZ SMALL recessed flanged aluminum profile.

Finish

Part No. 117032

117035

2 - END CAP (REQUIRED)





3 - SUPPORT BRACKET (REQUIRED)



OZ SMALL recessed profile steel installation support bracket. Suggested 2pcs for 3.33ft L and 3pcs for 6.61ft L profiles.

Part No. 1T7043

targettiusa.com




4 - JOINT CONNECTORS (OPTIONAL)






OZ recessed profile linear joint connector kit, includes 2pcs mechanical linear joints and 4pcs screws. Compatible with small and large profiles.

Part No. 1T704





OZ SMALL recessed profile L-joint connector.						
Finish	0	•				
Part No.	1T7037	1T7038				

O Plaster White Finish

Deep Black Finish

INSTALLATION DIAGRAMS

NOTE: Max of 4 connectors (excluding power feed) or 30ft or power rail per individual power supply.

RECESSED INSTALLATION

Power Rail + Recessed Profile

