


# MARAMA

## Portable LED Table Lamp

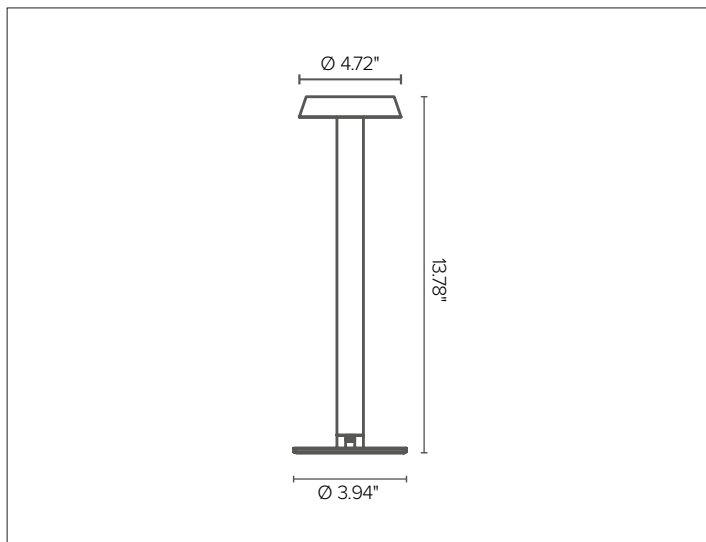

### CONCEPT

Touch sense controlled LED table lamp, dimmable and cordless. Elegant and essential design, perfect for both modern and classical settings.

### MECHANICAL CHARACTERISTICS

<b>Materials</b>	Powder-coated aluminum, frosted polycarbonate lens.
<b>Features</b>	Operated by a 'touch on' the top of the diffuser. The touch activates on/off and light intensity.
<b>Protection</b>	IP53
<b>Finish</b>	Textured finish. <input type="radio"/> White <input type="radio"/> Corten <input type="radio"/> Black

### CERTIFICATIONS

ETL Listed  
RoHS Compliant

### WARRANTY

3 year limited warranty

### ELECTRICAL CHARACTERISTICS

<b>Power Supply</b>	Battery operated. Battery life of up to 12 hours at full light output. Equipped with large capacity 6600mAh rechargeable lithium battery. Type-C charging cable included (can be used with any cable with Type-C jack), charger USB C not included. Battery charging time 5-6 hours. Intensity (dimming) and TW option controlled with touch sense activated trigger.
<b>Wattage</b>	2W
<b>Voltage</b>	5V DC
<b>Operating Temp</b>	-25°C / +45°C
<b>Trigger Time</b>	<0,2 s

### SOURCE

LED source with diffused light directed downwards.

TM30	CCT (Nominal)	CRI	Rg
	3000K	90	0
	TW 1800K – 4000K	90	0

LED DETAILS	W	Efficacy	Lm	Kelvin	Lifetime**
	2.0	50	100	3000K	L70 B20
	2.0	50	100	1800K-4000K	L70 B50

# MARAMA

## SPECIFICATION INFORMATION

MAR


1                      2                      3                      4                      5

Ex: MAR02BTWBK

1 - PRODUCT CODE	2 - POWER	3 - WATTAGE	4 - KELVIN	5 - FINISH
MAR — MARAMA	<ul style="list-style-type: none"> <li>— — USBC Power Charging Cord</li> <li><b>B</b> — Charging Base</li> </ul>	<b>02</b> — 2W	<ul style="list-style-type: none"> <li><b>30</b> — 3000K</li> <li><b>TW</b> — 1800K – 4000K</li> </ul>	<ul style="list-style-type: none"> <li><b>WH</b> — White</li> <li><b>BK</b> — Black</li> <li><b>CO</b> — Corten</li> </ul>

## POWER CHARGING VERSIONS

CHARGING CORD

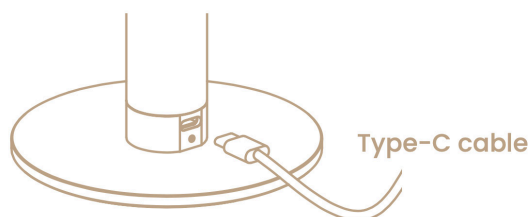

CHARGING BASE

