


DURALED™ STARGAZER

G19 LED Cluster Lamp

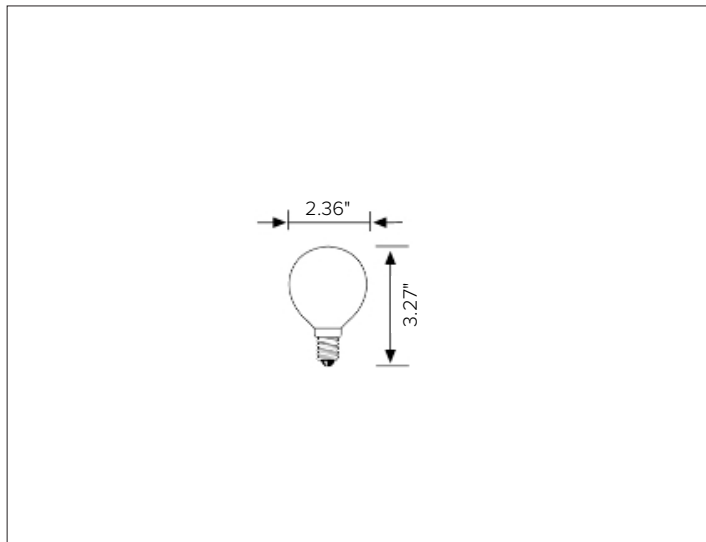

CONCEPT

LED globe lamp with LED cluster array for use with E26 based strands.

MECHANICAL CHARACTERISTICS

| | |
|-------------------|---|
| Materials | Clear glass globe |
| Weight | 0.1 lbs |
| Protection | IP20 IP65 when used with DuraLED Cable Light |

CERTIFICATIONS

Tested in accordance with LM-79-08.
 ^ Lamp is exempt from Title 20 as it is under the lumen wattage requirement.
 cULus Listed E481518

WARRANTY

3 year limited warranty

ELECTRICAL CHARACTERISTICS

| | |
|------------------------|---------|
| Base | E26 |
| Lamp Type | G19 |
| Wattage | 0.8W |
| Voltage | 120V AC |
| Power Factor | 0.3 |
| # On/Off Cycles | 7,500 |
| Start Time | <0.2s |

SOURCE

(5) LED Cluster

| TM30 | CCT (Nominal) | Ra | SDCM |
|------|---------------|-----|------|
| | 2200K | >55 | ±2 |
| | 2700K | >55 | ±2 |

OPTIC

| | |
|-------------------------|-----------------------------------|
| Beam | 300° |
| Delivered Lumens | 15Lm |
| Efficacy | 19Lm/W |
| Lifetime | L70/B50 15,000hrs at max TA +25°C |

DURALED™ STARGAZER

SPECIFICATION INFORMATION

DL

1 2 3 4 5 6 7

Ex: DLSGMD22120DSP

OPTIONAL

| 1 - PRODUCT CODE | 2 - TYPE | 3 - BASE | 4 - KELVIN | 5 - VOLTAGE | 6 - DIMMING | 7 - COATING |
|----------------------|-----------------------|------------------------|--|-------------------|---------------------|---------------------------------------|
| DL – DURALED™ | SG – STARGAZER | MD – E26 Medium | 22 – 2200K 27 – 2700K | 120 – 120V | D – Dimmable | — – None SP – Shatter Proof |



Lead time for quick ship fixtures is 1-2 weeks from processed PO date. Consult factory for quantities of over 50pcs to confirm lead time.

DLSGMD22120D
DLSGMD27120D