



IVY SUSPENDED

Rigid Stem Mounted Adjustable LED Light Module

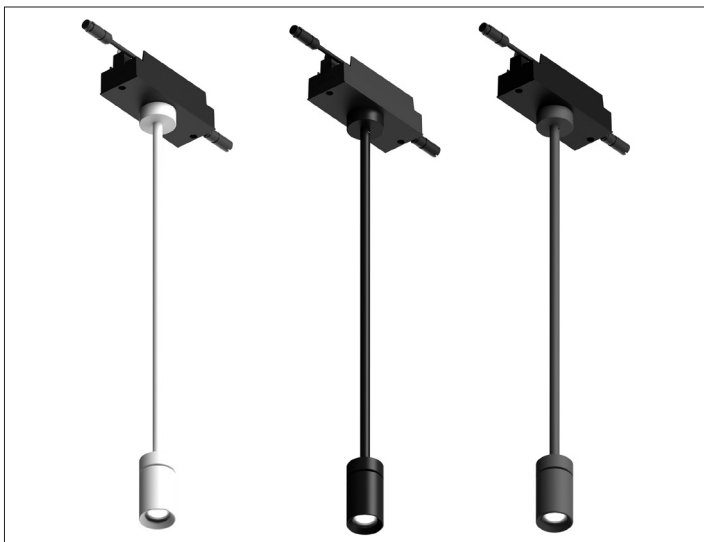

IVY Suspended Cylinder in Plaster White / Black Anodized / Ferrite finishes.

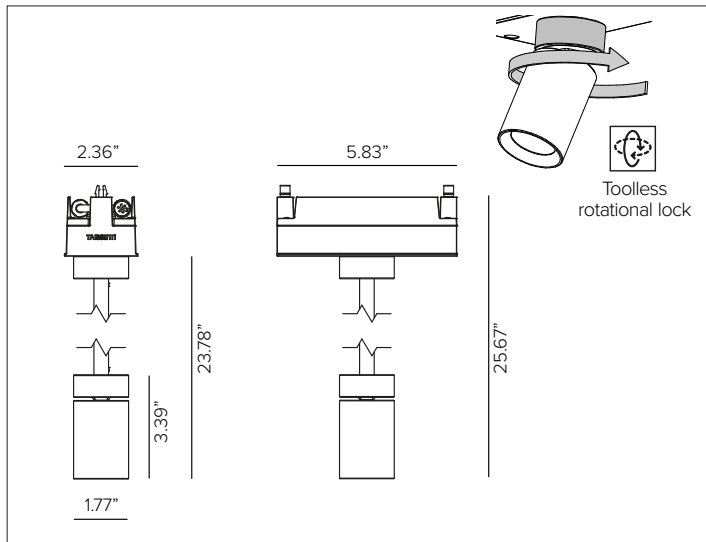

CONCEPT

Professional adjustable suspended low voltage cylinder projector luminaire for indoor/outdoor modular light system allowing for maximum application flexibility. *Designed in collaboration with Stefano Boeri Interiors as product design consultant.*

MECHANICAL CHARACTERISTICS

Dimensions	Ø 1.77" Dia.
Materials	Aluminum CNC machined cylindrical body and joints protected with 15µ black anodization. Tempered extra clear front glass and rigid stem support.
Finish	Matte smooth finish: ● Black Anodized Textured finish: ● Ferrite Dark Grey ● Sandstone Grey ● Black ● Heritage Brown ● Bronze ● White Custom RAL
Power Connection	Fixtures are manufactured complete with IN/OUT connections with micro male/female IP65 connectors. System interconnections require IVY jumper cable connections, see available options.
Functionality	Optical unit adjusts 90° on the vertical plane and 355° on the horizontal plane with toolless mechanical rotation locking system and friction aiming.
Mounting	Fast fixture installation using anodized aluminum clips into profile. Fixture positioning along profile with mechanical locking using hex 3mm key.
Weight	117lbs
Protection	IP65

CERTIFICATIONS

cULus Class 2 Listed.
Tested in accordance with LM-79-08.
Compliant with California energy regulations.
RoHS3 EU 215/863

WARRANTY

5 year limited warranty.
^ Fixture suitable for use in marine grade environments. Not to be in direct contact with salt or corrosive agents for extended periods of time.

SUSTAINABILITY

Luminaire designed for disposal/recycling at end-of-life. Replaceable LED light source and control gear by a Targetti technician.

ELECTRICAL CHARACTERISTICS

Power Supply	Remote power supply options available.
Wattage	7W
Voltage	24V DC
Control	0-10V wireless control from integral power feed/dimming control box for group fixture dimming control OR wireless bluetooth control through Casambi app interface for individual fixture dimming control. Refer to Targetti LMS (Light Management System) for detailed information. Product dimming control requires factory setup of fixture zone identification prior to shipment. Project layout drawings required.

SOURCE

LED Engine made of linear LED boards.

TM30	CCT (Nominal)	CRI	Rf	Rg	SDCM
	2700K	90	92	99	3
	3000K	90	92	101	3
	3500K	90	91	100	3
	4000K	90	90	98	3

OPTIC

Optic equipped with an acrylic collimator lens and holographic diffusive lens.

Beam	SP 21°	FL 37°	WFL 53°
Delivered Lumens	2700K 535Lm	579Lm	490Lm
	3000K 565Lm	623Lm	528Lm
	3500K 589Lm	643Lm	544Lm
	4000K 612Lm	662Lm	560Lm
Efficacy	100lm/W max. Refer to photometric graphs for specific values.		
Lifetime	L91/B10 >30,000hrs at max TA +25°C L88/B10 >50,000hrs at max TA +25°C L84/B10 >80,000hrs at max TA +25°C L81/B10 >100,000hrs at max TA +25°C		
Photobiological Classification	Low risk photobiological safety RG1		


IVY SUSPENDED

SPECIFICATION INFORMATION

IV										
1	2	3	4	5	6	7	8	9	10	11
Ex: IVSUWTLISP30 / PS050						REQUIRED	OPTIONAL	REQUIRED	OPTIONAL	REQUIRED
1 - PRODUCT CODE	2 - TYPE	4 - FINISH			5 - WATTAGE	6 - OPTICS		7 - KELVIN		
IV — IVY	SU — Suspended	BA — Black Anodized FE — Ferrite Dark Grey SG — Sandstone Grey HB — Heritage Brown BZ — Bronze WT — White BT — Black RAL — Custom RAL			L1 — 7W	SP — SP 21° FL — FL 37° WF — WFL 53°		27 — 2700K 30 — 3000K 35 — 3500K 40 — 4000K		
7 - POWER FEED / CONTROL BOX		8 - ELECTRICAL	9 - POWER SUPPLY		10 - CONTROLLER		11 - PROFILE			
0-10V Dimming Control Box See section for details Bluetooth Casambi Control Box See section for details		Jumper Connection Cable See section for details	Power Supply See section for details		Casambi Xpress Remote Controller See section for details		REQUIRED See <i>IVY PROFILE</i> spec sheet for specification information. SURFACE or RECESSED .			

IVY SUSPENDED


7 – POWER FEED / CONTROL BOX (REQUIRED)

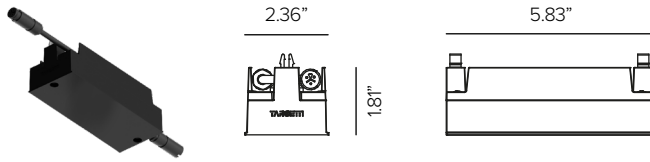

IVY 0-10V power feed and dimming control box, for group fixture control.

Finish ●

Part No. **1US417910**

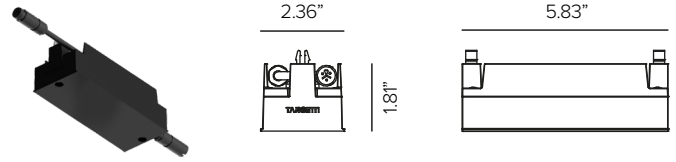

IVY wireless Bluetooth Casambi power feed and dimming control box, for individual fixture control

Finish ●

Part No. **1US4179CA**

8 – ELECTRICAL (OPTIONAL DEPENDANT ON FIXTURE PLACEMENT)



IVY jumper connection cable.

Length 4ft 8ft 10ft

Part No. **1US4181 1US4182 1US4183**


9 - POWER SUPPLY (REQUIRED)

ENCLOSURE

Part No.	Wattage	Control	Dim Range	Rating	In / Out Voltage	Certification	Dimensions (Enclosure)	Description
PS057	40W	VIA INTEGRAL POWER BOX	0.1%	NEMA3R	120-277V / 24V	UL CLASS 2	6.3" x 10.79" x 2.17"	MEAN WELL HLG ELECTRONIC DRIVER.
PS058	60W	VIA INTEGRAL POWER BOX	0.1%	NEMA3R	120-277V / 24V	UL CLASS 2	6.3" x 10.79" x 2.17"	MEAN WELL HLG ELECTRONIC DRIVER.
PS059	96W	VIA INTEGRAL POWER BOX	0.1%	NEMA3R	120-277V / 24V	UL CLASS 2	6.3" x 10.79" x 2.17"	MEAN WELL HLG ELECTRONIC DRIVER.

10 - CONTROLLER (OPTIONAL)

COMPATIBLE WITH WIRELESS BLUE TOOTH CASAMBI VERSION ONLY FOR INDIVIDUAL FIXTURE CONTROL.

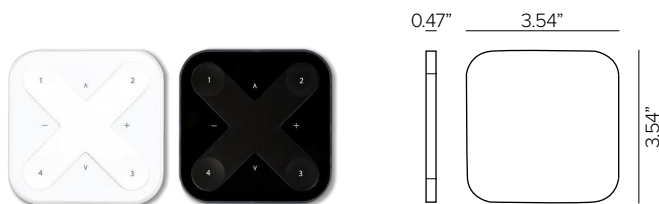

Casambi Xpress remote controller, indoor mounted only. Four programmable presets. CR2430 battery (Included). **For wireless blue tooth Casambi control only.**

Finish ○ White ● Black

Part No. **SWITCH26 SWITCH25**


IVY SUSPENDED

PHOTOMETRY


SPOT




2700K		H(m)	D(m)	Emax(lx)	
Ra90			21°		
Fixture Power	7W	1	0.38	3126	
Source Flux	634lm	2	0.75	782	
Fixture Flux	535lm	3	1.13	347	
Efficacy	76lm/W	4	1.51	195	
TS1645	Imax=4931cd/klm	Imax	3126cd	5	1.89 125

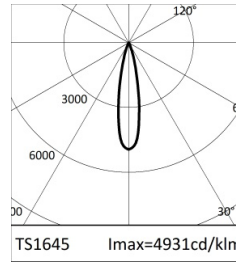

3000K		H(m)	D(m)	Emax(lx)	
Ra90			21°		
Fixture Power	7W	1	0.38	3304	
Source Flux	670lm	2	0.75	826	
Fixture Flux	565lm	3	1.13	367	
Efficacy	81lm/W	4	1.51	206	
TS1645	Imax=4931cd/klm	Imax	3304cd	5	1.89 132

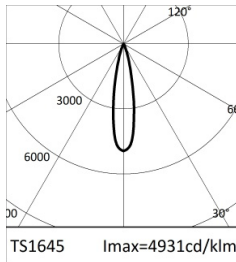

3500K		H(m)	D(m)	Emax(lx)	
Ra90			21°		
Fixture Power	7W	1	0.38	3442	
Source Flux	698lm	2	0.75	860	
Fixture Flux	589lm	3	1.13	382	
Efficacy	84lm/W	4	1.51	215	
TS1645	Imax=4931cd/klm	Imax	3442cd	5	1.89 138

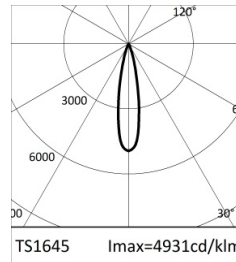


4000K		H(m)	D(m)	Emax(lx)	
Ra90			21°		
Fixture Power	7W	1	0.38	3580	
Source Flux	726lm	2	0.75	895	
Fixture Flux	612lm	3	1.13	398	
Efficacy	87lm/W	4	1.51	224	
TS1645	Imax=4931cd/klm	Imax	3580cd	5	1.89 143


FLOOD




2700K		H(m)	D(m)	Emax(lx)	
Ra90			37°		
Fixture Power	7W	1	0.66	1368	
Source Flux	695lm	2	1.33	342	
Fixture Flux	579lm	3	1.99	152	
Efficacy	88lm/W	4	2.65	85	
TS1646	Imax=1968cd/klm	Imax	1368cd	5	3.32 55

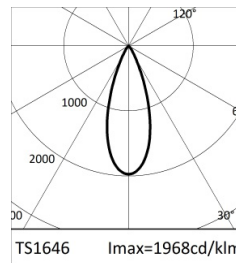

3000K		H(m)	D(m)	Emax(lx)	
Ra90			37°		
Fixture Power	7W	1	0.66	1472	
Source Flux	748lm	2	1.33	368	
Fixture Flux	623lm	3	1.99	164	
Efficacy	94lm/W	4	2.65	92	
TS1646	Imax=1968cd/klm	Imax	1472cd	5	3.32 59

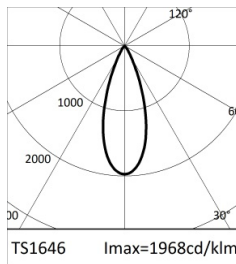


3500K		H(m)	D(m)	Emax(lx)	
Ra90			37°		
Fixture Power	7W	1	0.66	1518	
Source Flux	771lm	2	1.33	379	
Fixture Flux	643lm	3	1.99	169	
Efficacy	97lm/W	4	2.65	95	
TS1646	Imax=1968cd/klm	Imax	1518cd	5	3.32 61

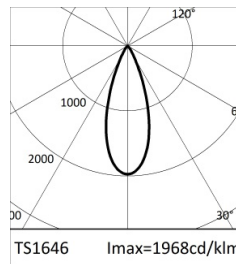


4000K		H(m)	D(m)	Emax(lx)	
Ra90			37°		
Fixture Power	7W	1	0.66	1563	
Source Flux	794lm	2	1.33	391	
Fixture Flux	662lm	3	1.99	174	
Efficacy	100lm/W	4	2.65	98	
TS1646	Imax=1968cd/klm	Imax	1563cd	5	3.32 63


WIDE FLOOD

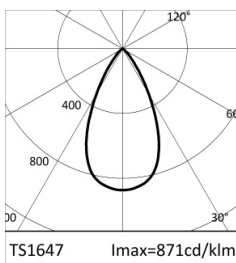


2700K		H(m)	D(m)	Emax(lx)	
Ra90			53°		
Fixture Power	7W	1	1.00	605	
Source Flux	695lm	2	2.00	151	
Fixture Flux	490lm	3	3.01	67	
Efficacy	74lm/W	4	4.01	38	
TS1647	Imax=871cd/klm	Imax	605cd	5	5.01 24

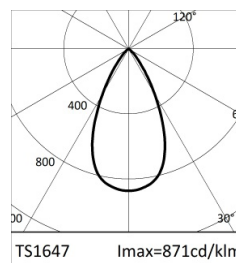

3000K		H(m)	D(m)	Emax(lx)	
Ra90			53°		
Fixture Power	7W	1	1.00	651	
Source Flux	748lm	2	2.00	163	
Fixture Flux	528lm	3	3.01	72	
Efficacy	80lm/W	4	4.01	41	
TS1647	Imax=871cd/klm	Imax	651cd	5	5.01 26

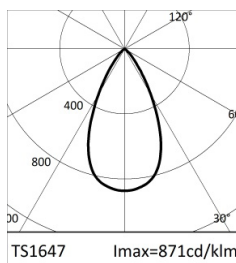


3500K		H(m)	D(m)	Emax(lx)	
Ra90			53°		
Fixture Power	7W	1	1.00	671	
Source Flux	771lm	2	2.00	168	
Fixture Flux	544lm	3	3.01	75	
Efficacy	82lm/W	4	4.01	42	
TS1647	Imax=871cd/klm	Imax	671cd	5	5.01 27

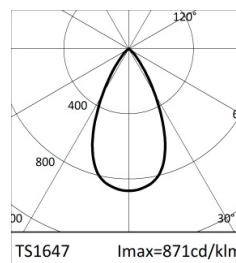


4000K		H(m)	D(m)	Emax(lx)	
Ra90			53°		
Fixture Power	7W	1	1.00	691	
Source Flux	794lm	2	2.00	173	
Fixture Flux	560lm	3	3.01	77	
Efficacy	85lm/W	4	4.01	43	
TS1647	Imax=871cd/klm	Imax	691cd	5	5.01 28

IVY SUSPENDED

INSTALLATION DIAGRAM

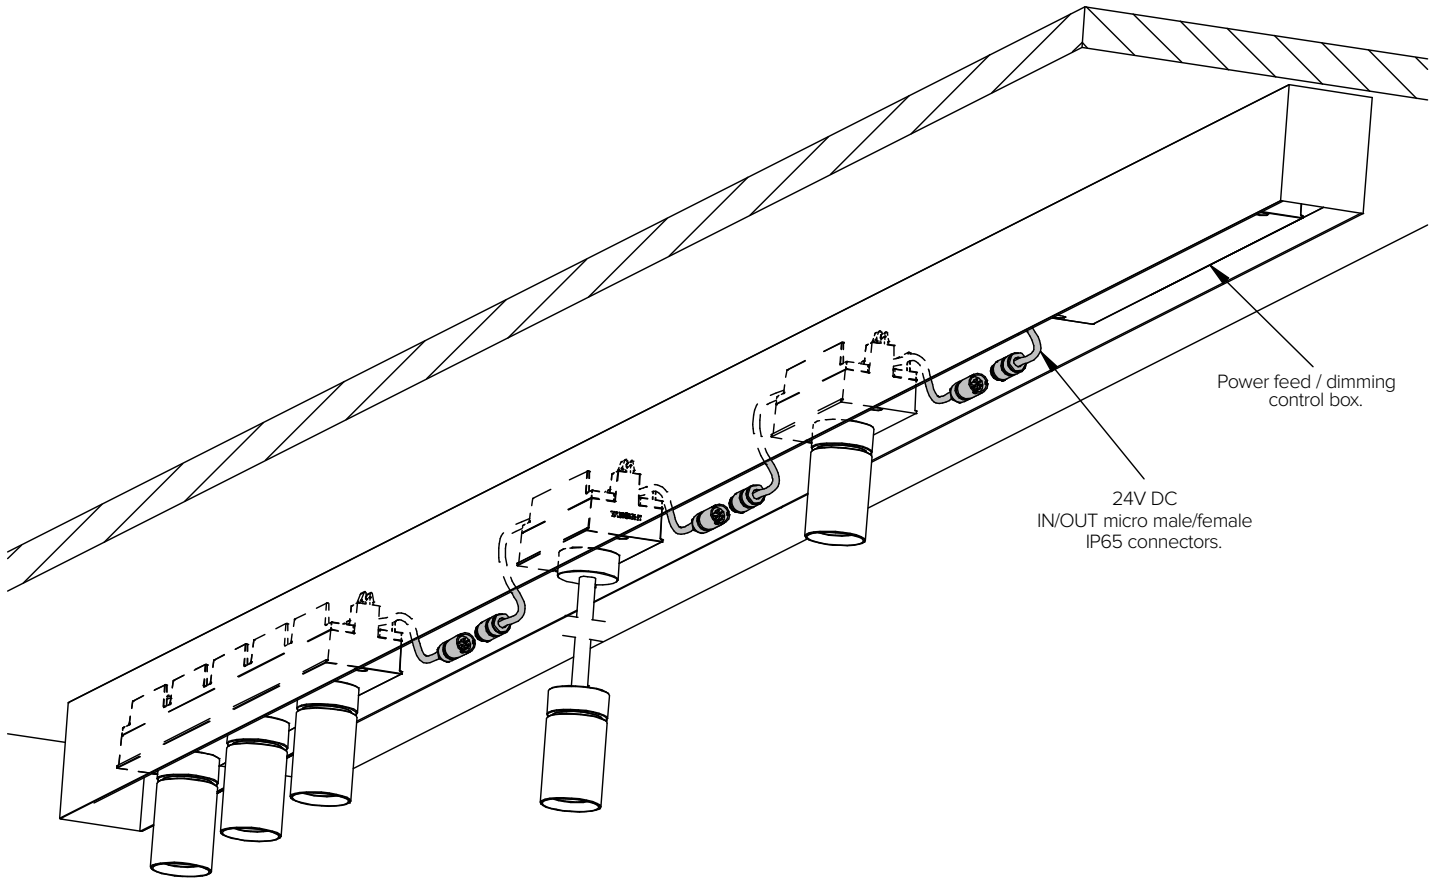

WIRING DIAGRAM

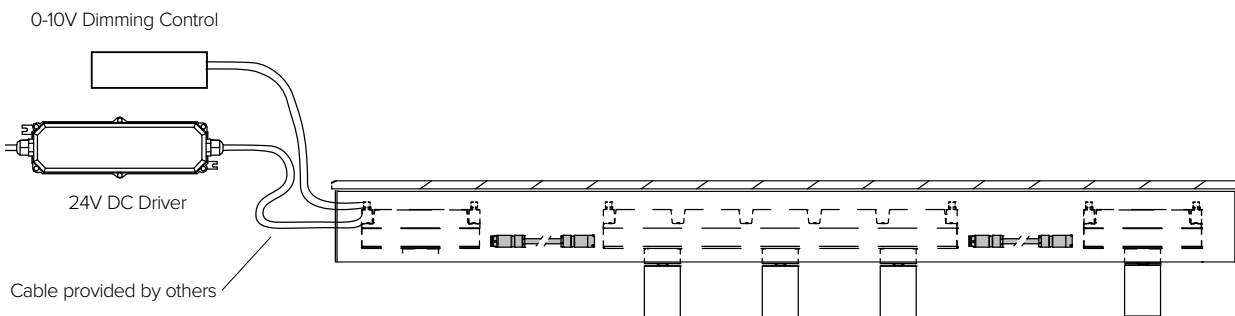

IVY SUSPENDED

CONTROL SYSTEM

Controlling light has never been easier. Targetti [LMS \(Light Management System\)](#) with Control by Casambi was created to make it possible to control light via Bluetooth Low Energy without the use of any special cables, ensuring system operational readiness. This wireless technology is compatible with all modern smart devices: smartphones, tablets and even smartwatches. Targetti fixtures are equipped with a special interface that allows them to communicate with each other to create a remotely controllable "smart" network.

The advantages are boundless. The possibility for users to interact with lighting – varying intensity, tone and shape in complete freedom and autonomy according to their needs. The design approach known as Human Centric Lighting that places people at the center of lighting projects.

Flexible and easy to use, suitable for managing all types of simple to more complex systems, LMS is a future-oriented system that can be constantly updated because it can be used with a simple application that can be downloaded onto a mobile device to manage the entire system in wireless mode.

INSTALLATION SEQUENCE

