



IVY SPEAKER

SPEAKER ACCESSORY

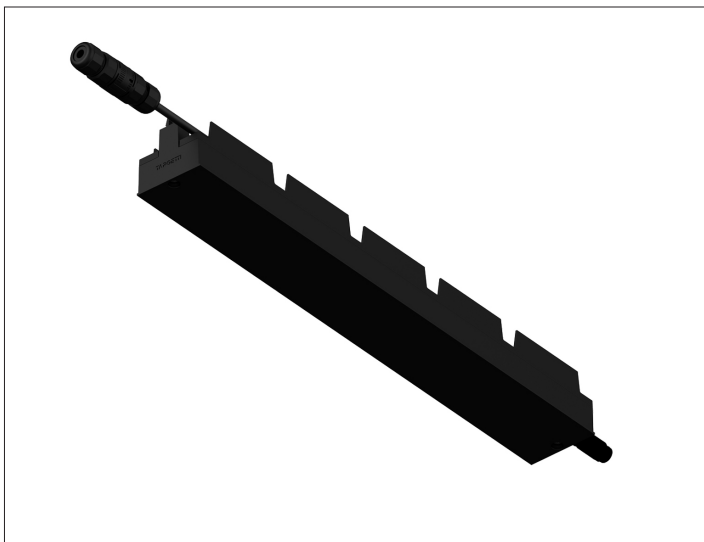

IVY Speaker in Black finish.

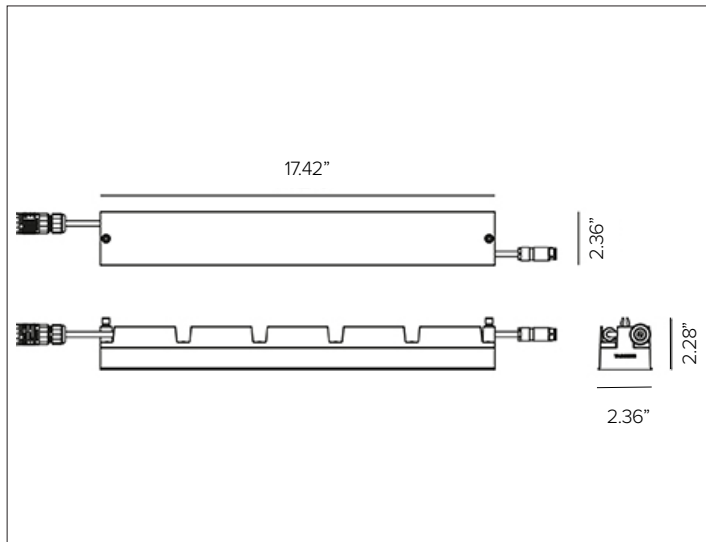

CONCEPT

Audio emitter with "net streaming" capability, equipped with integrated power amplifier and speakers.

MECHANICAL CHARACTERISTICS

Dimensions	2.36"W x 17.42"L nominal.
Materials	Consists of an electronic circuit, two exciters and a traditional loudspeaker concealed inside polymeric polycarbonate box sealed with a silicone rubber gasket
Finish	● Black
Power Connection	Manufactured complete with IN/OUT connections with micro male/female IP65 connectors. System interconnections require IVY jumper cable connections, see available options.
Mounting	Fast installation using anodized aluminum clips into profile. Positioning along profile with mechanical locking using hex 3mm key.
Weight	1.87lbs
Protection	IP65

CERTIFICATIONS

cULus Class 2 Listed.
 Tested in accordance with LM-79-08.
 Compliant with California energy regulations.
 RoHS3 EU 215/863

WARRANTY

5 year limited warranty.

SUSTAINABILITY

Luminaire designed for disposal/recycling at end-of-life. Replaceable LED light source and control gear by a Targetti technician.

ELECTRICAL CHARACTERISTICS

Power Supply	Remote power supply options available.
Wattage	25W peak in maximum volume. 1W consumption in stand-by mode. <i>Note: The consumption depends on the audio being played.</i>
Voltage	24V DC
Control	Controlled via wi-fi (DLNA) by a special 4STREAM app available for iOS or ANDROID mobile devices.
Audio Frequency Range	100 Hz - 18 KHz. VLAN standard: IEEE 802.11 b/g/n, Wi-Fi compliant.
Wi-fi Frequency	2.4GHz o 5GHz. Maximum working distance on wi-fi: 262ft (in open air).
Connectivity	Bluetooth version 5.1.
Streaming Protocols	Spotify Connect, Airplay, DLNA, QPlay
Music Apps	Spotify, iHeartRadio, Napster/Rhapsody, and others.
Multiroom Services	Airplay, Spotify, Bluetooth.
Multiroom Max	Up to 5 devices.
Music Formats	HTTP/ HTTPS/RTSP/MMS/TS protocol - HLS/ASX/M3U playlist format - MP3/ AAC/FLAC/ALAC/WMA/APE/OGG codec.
Bluetooth Profiles	A2DP, AVRCP, HFP, HID profiles, Support BLE, Support EDR.
iOS Operating Systems	Suggested ≥ iOS10 or ≥ Android 4.3.3.

IVY SPEAKER


SPECIFICATION INFORMATION



Ex: 1E4262 / 1US4179CA / PS057


1 - PRODUCT CODE	2 - POWER FEED / CONTROL BOX	3 - ELECTRICAL	4 - POWER SUPPLY	5 - PROFILE
1E4262 — IVY Speaker	Bluetooth Casambi Control Box See section for details	Jumper Connection Cable See section for details	Power Supply See section for details	REQUIRED See IVY PROFILE spec sheet for specification information. SURFACE or RECESSED .

OPTIMAL ACOUSTIC PERFORMANCE

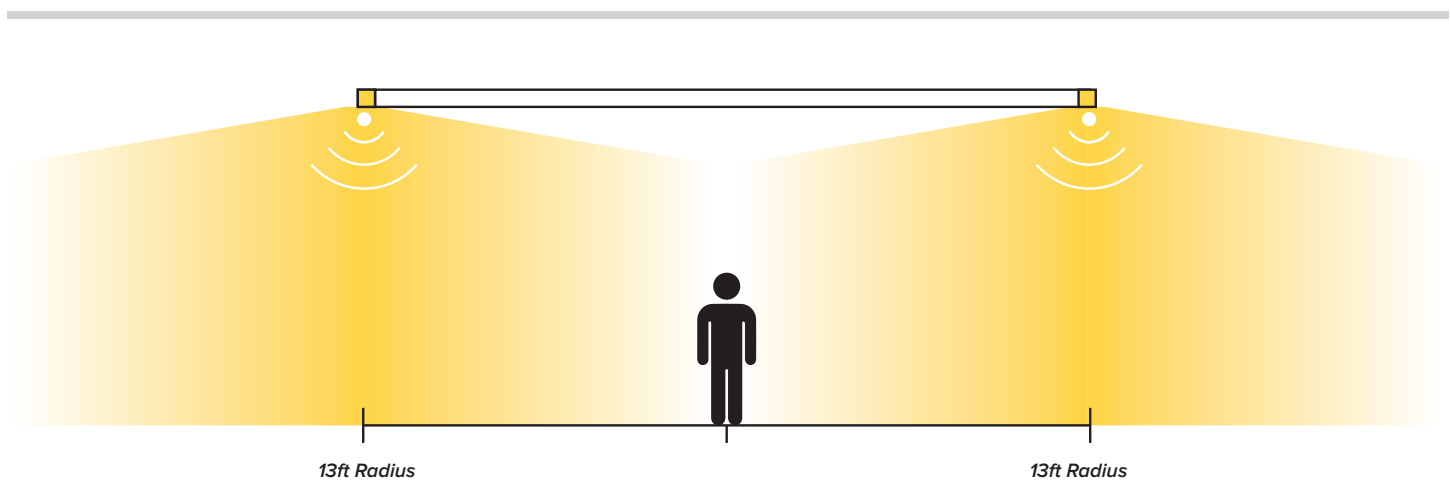

IVY SPEAKER

2 – POWER FEED / CONTROL BOX (REQUIRED)

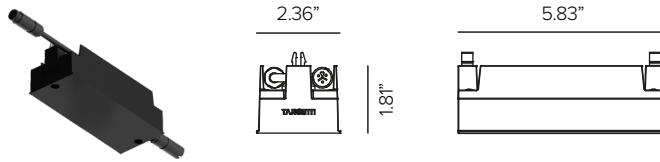

IVY wireless Bluetooth Casambi power feed and dimming control box, for individual fixture control

Finish

Part No. **1US4179CA**

3 – ELECTRICAL (OPTIONAL DEPENDANT ON PLACEMENT)



IVY jumper connection cable.

Length 4ft 8ft 10ft

Part No. **1US4181** **1US4182** **1US4183**


4 - POWER SUPPLY (REQUIRED)

ENCLOSURE

Part No.	Wattage	Rating	In / Out Voltage	Certification	Dimensions (Enclosure)	Description
PS057	40W	NEMA3R	120-277V / 24V	UL CLASS 2	6.3" x 10.79" x 2.17"	MEAN WELL HLG ELECTRONIC DRIVER.
PS058	60W	NEMA3R	120-277V / 24V	UL CLASS 2	6.3" x 10.79" x 2.17"	MEAN WELL HLG ELECTRONIC DRIVER.
PS059	96W	NEMA3R	120-277V / 24V	UL CLASS 2	6.3" x 10.79" x 2.17"	MEAN WELL HLG ELECTRONIC DRIVER.

IVY SPEAKER

INSTALLATION DIAGRAM - IVY MODULAR SYSTEM

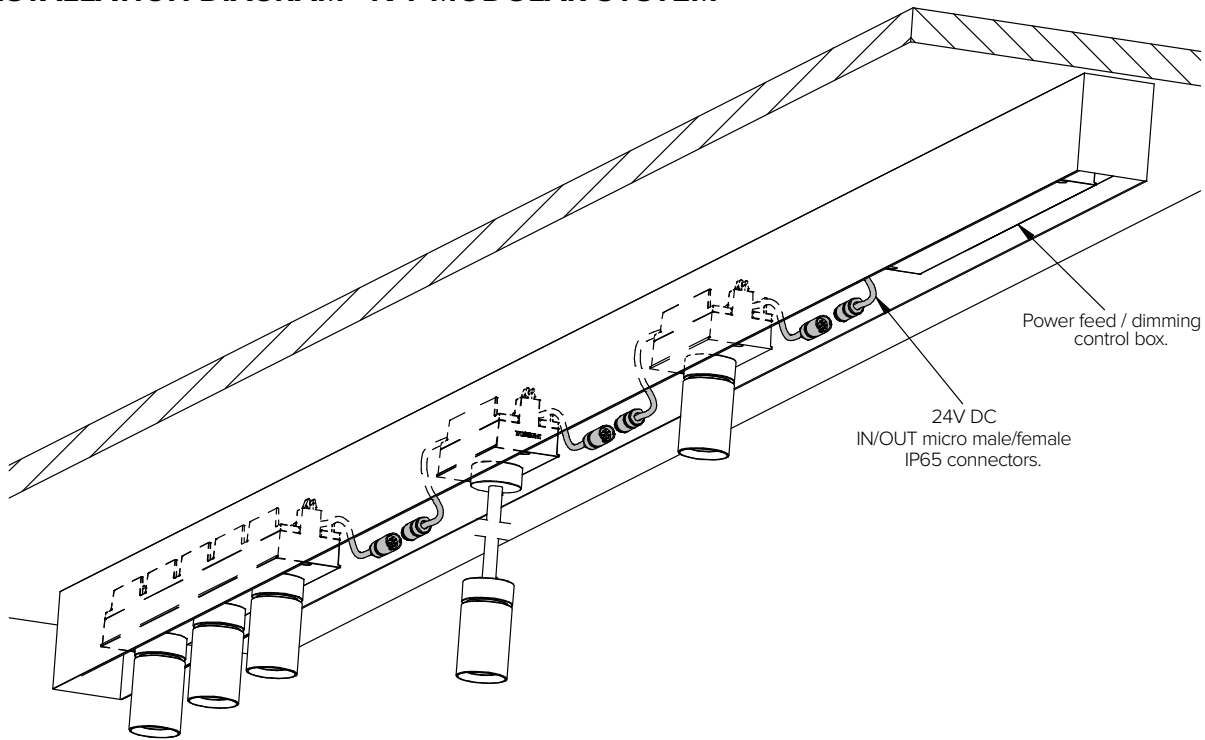

INSTALLATION DIAGRAM - IVY SPEAKER

