




LUCERA


LUCF1-
LUCF2-

MULTI-HEAD EVENT WITH PROFESSIONAL
FIXED HEADS


LUCF1-
2 x 6 HEADS

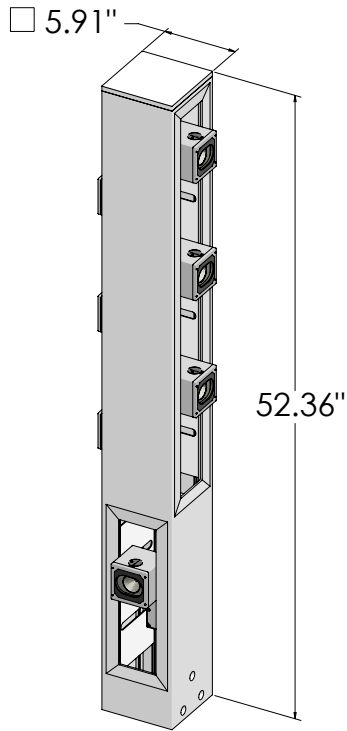

LUCF2-
4 x 4 HEADS

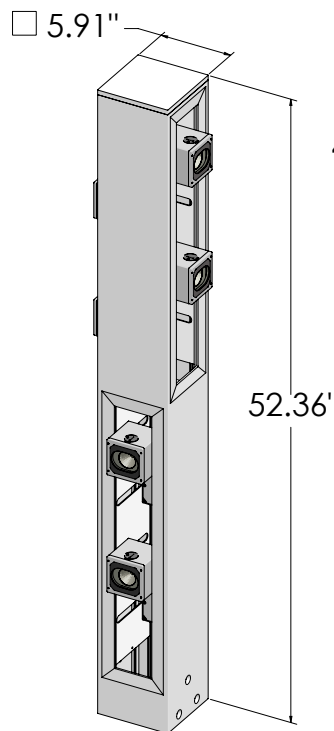

120-277 VAC



IK 09

If in doubt about the symbols please
refer to catalog or website

WARNING

**To ensure a maximum efficient use of the
product, read the instructions before proceeding
installment.**



This fixture must be installed by a licensed and qualified
electrician. The installer must comply with NEC and local
building codes when installing the fixture



Electrical current can cause painful shock, serious injury,
or even death. Make sure you turn off the power supply,
ground fixture(s), and make sure all electrical
connections are correct and secured tightly



For use in IP66 installations.



Keep the label of the original packaging if any eventual
future claims are needed

Table of Contents

Packaging Contents
Pole Accessories (Optional)
Pole Accessories Installation
Pole Diagram
Maintenance / Support


Pg.2/5
Pg.6/7
Pg.8/16
Pg.17
Pg.18

2024-03 Pg.1

Packaging Contents / Dimensions

FIXED HEAD VERSION

LUCF1L3T1-
TYPE I
52.17" Lg




2+6 HEAD
STYLE ONLY

LUCF1L3T2-
TYPE II
52.17" Lg





2+6 HEAD
STYLE ONLY

LUCF1L3T3
TYPE III
52.17" Lg





2+6 HEAD
STYLE ONLY

LUCF2T4-
TYPE III
52.17" Lg




4+4 HEAD
STYLE ONLY

LUCF2T5-
TYPE VX
52.17" Lg



4+4 HEAD
STYLE ONLY



52.17" FIXTURE IN 55"x 8"x 8" BOX@49Lbs

Textured finish.

- Ferrite Dark Grey (Default) ● Heritage Brown (HB)* ● Bronze (BZ)* ● White (WT)* ● Black (BT)* ● Sandstone Grey (SG)* ^B Custom RAL

Packaging Contents / Dimensions Cont.


POLE (REQUIRE)

Part No. **1US002Z (*)**

11.5ft square powder coated aluminum pole.

5.9in x 5.9in profile with integral hatch door for utility power. **An additional 6"H is applied to the overall pole height when used with 1USCLR06 pole accessory collar.**

Weight: 58lbs

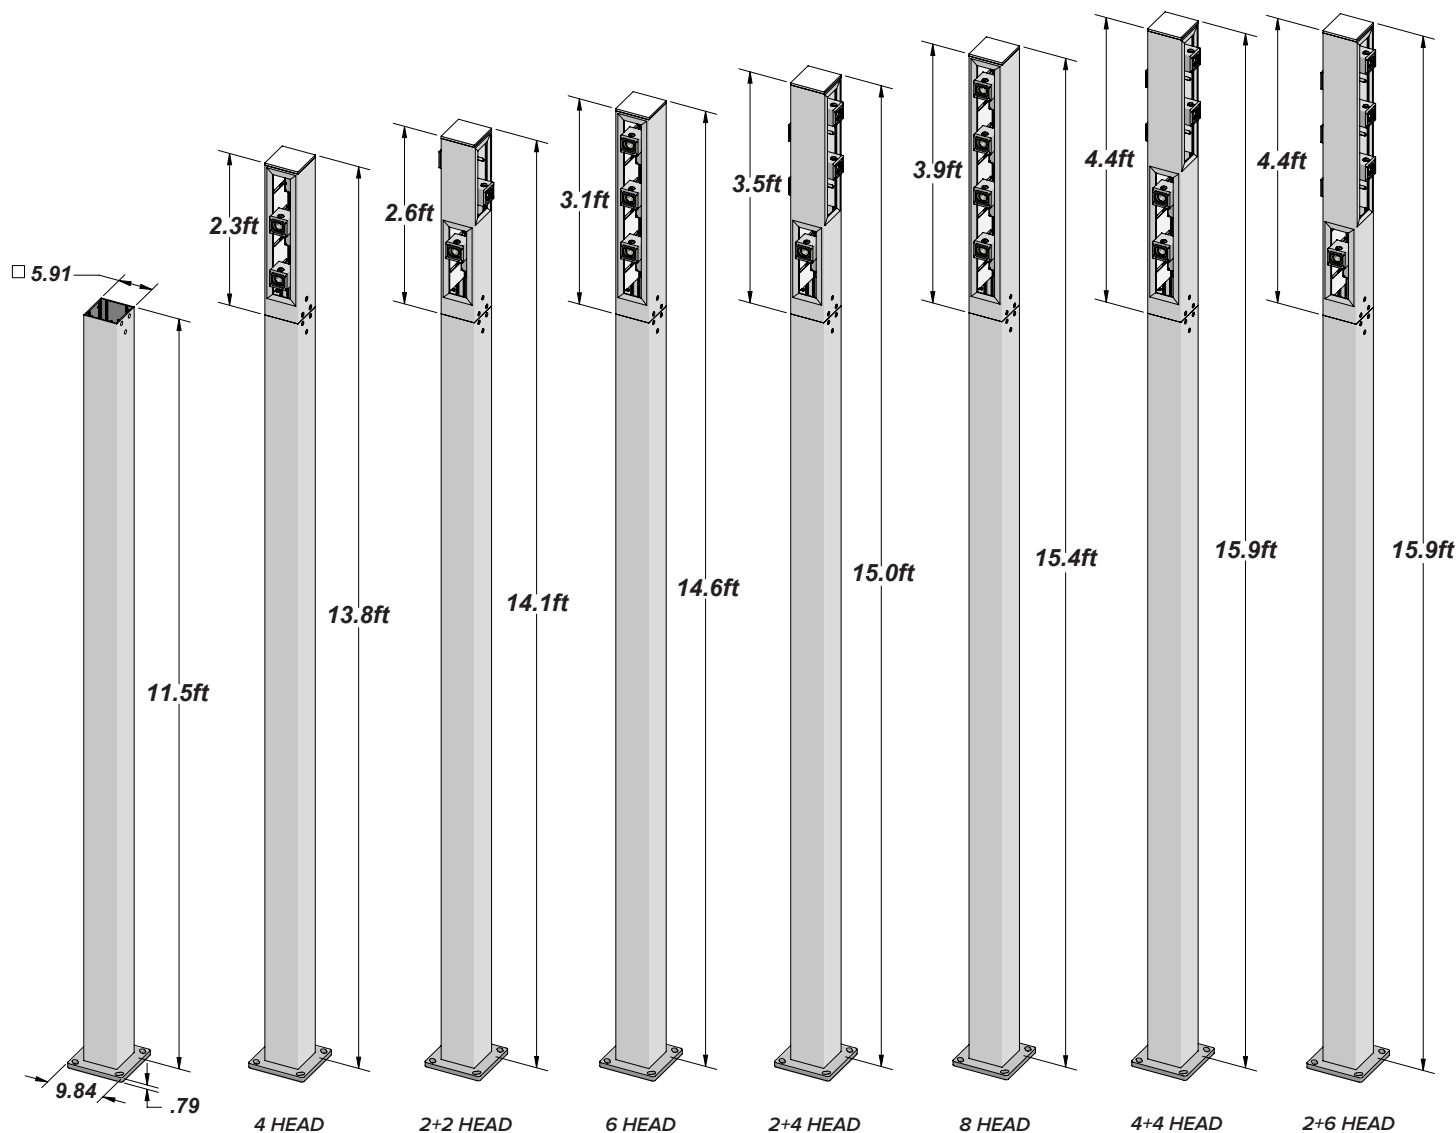

Textured Finish

● Ferrite Dark Grey (Default) ● Heritage Brown (HB)* ● Bronze (BZ)* ● White (WT)* ● Black (BT)* ● Sandstone Grey (SG)* ^B Custom RAL

Packaging Contents / Dimensions Cont.


POLE (REQUIRED)

Part No. **1US002Y (*)**

16.4ft square powder coated aluminum pole.

5.9in x 5.9in profile with integral hatch door for utility power. **An additional 6"H is applied to the overall pole height when used with 1USCLR06 pole accessory collar.**

Weight: 82lbs



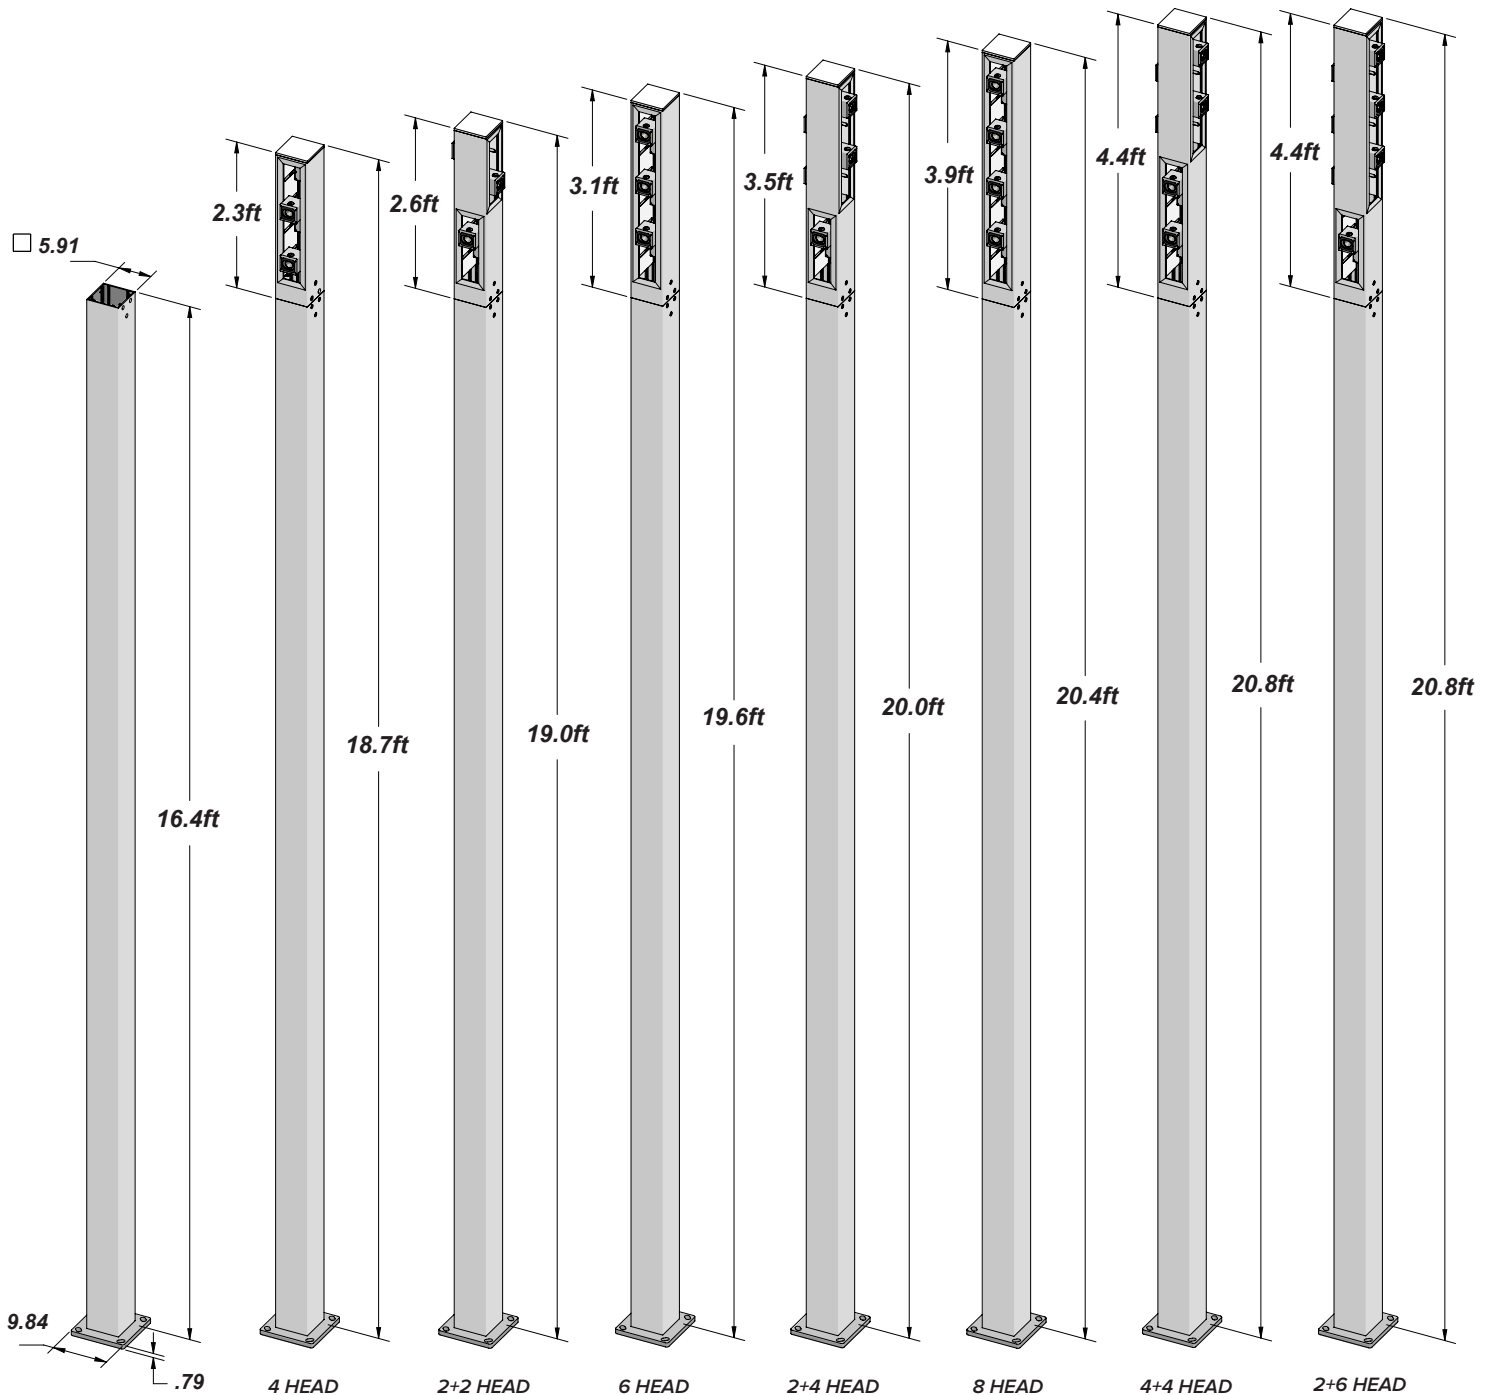


Textured Finish

Ferrite Dark Grey (Default)
 Heritage Brown (HB)*
 Bronze (BZ)*
 White (WT)*
 Black (BT)*
 Sandstone Grey (SG)*
 B Custom RAL

Packaging Contents / Dimensions Cont.


MOUNTING (REQUIRED)

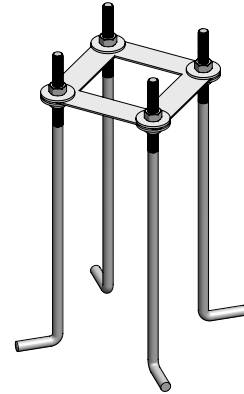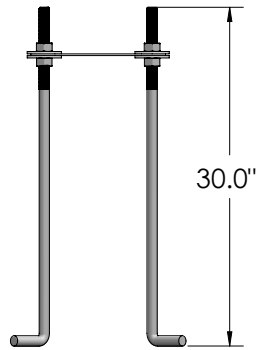


Part No. **1USE001A**

Pole anchor kit. 4ea 3/4"x 30" 'J' anchor bolts, 8ea hex nuts and washers, 1ea template.
(REQUIRED per pole)

Bolt Pattern Template

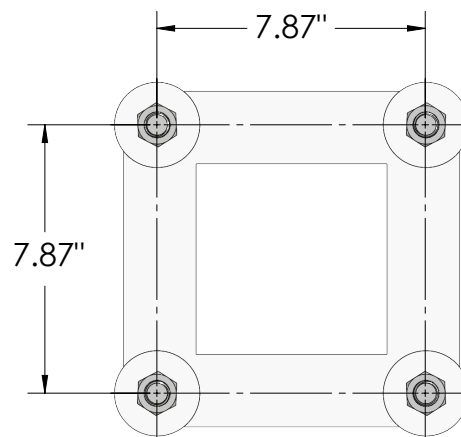


Pole Accessories (Optional)

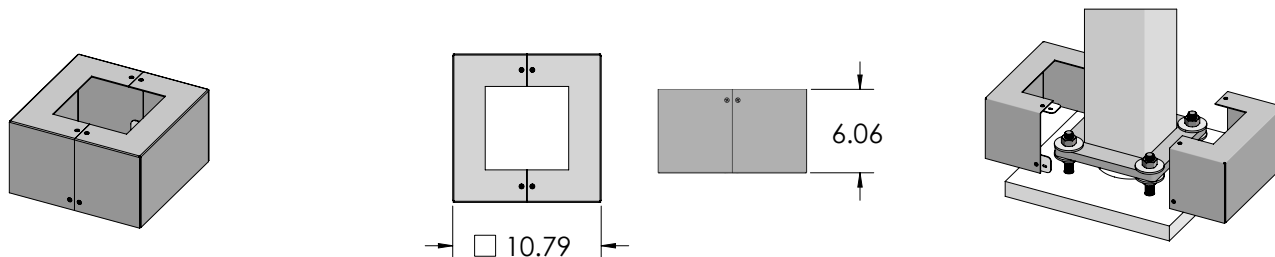

Decorative aluminum pole base cover.

Part No. A010A (*)



Integral angled IP67 wall plate camera. Analog 1080p 4-in-1 (HD / TVI / CVI / AHD) 155° viewing angle with 2.9mm lens. Equipped with Sony STARVIS that provides high quality color saturation when recording at night. **Required to be used with USCLR06 Accessory Collar.**

Part No. 1USCAM01




2.75"



Integral 2-in-1 motion sensor and photo cell. 270° motion, 70ft range with dusk to dawn setting. **Required to be used with 1USCLR06 Accessory Collar.**

Finish ● **Black** ● **White**

Part No. 1USSNS01BK 1USSNS01WH



4.00"



6.00"

Fusion® XS coaxial speaker. IP65 marine grade aluminum dome, 120W. **Required to be used with 1USCLR06 Accessory Collar.**

Part No. CONSULT FACTORY



Pole Accessories (Optional) Cont.





BannerSaver™ break away banner arms with mounting hardware and stainless steel mounting band, black finish. Sold in sets of two 12"L arms. **Consult factory for additional lengths. Banner not included.**

Part No. **CONSULT FACTORY**

Mounting Bracket

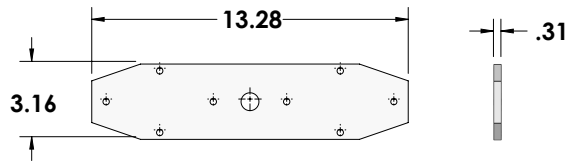

Pole Integrated

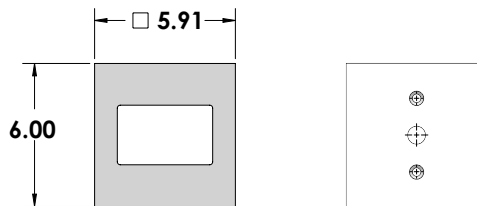

Accessory collar. 6"H pole integrated aluminum, 2pc steel mounting brackets included.


Required for mounting specified accessories as noted.

Weight: 11lbs


Part No. **USCLR06 (*)**

Pole Accessories Installation


US002Z(*)
US002Y(*)

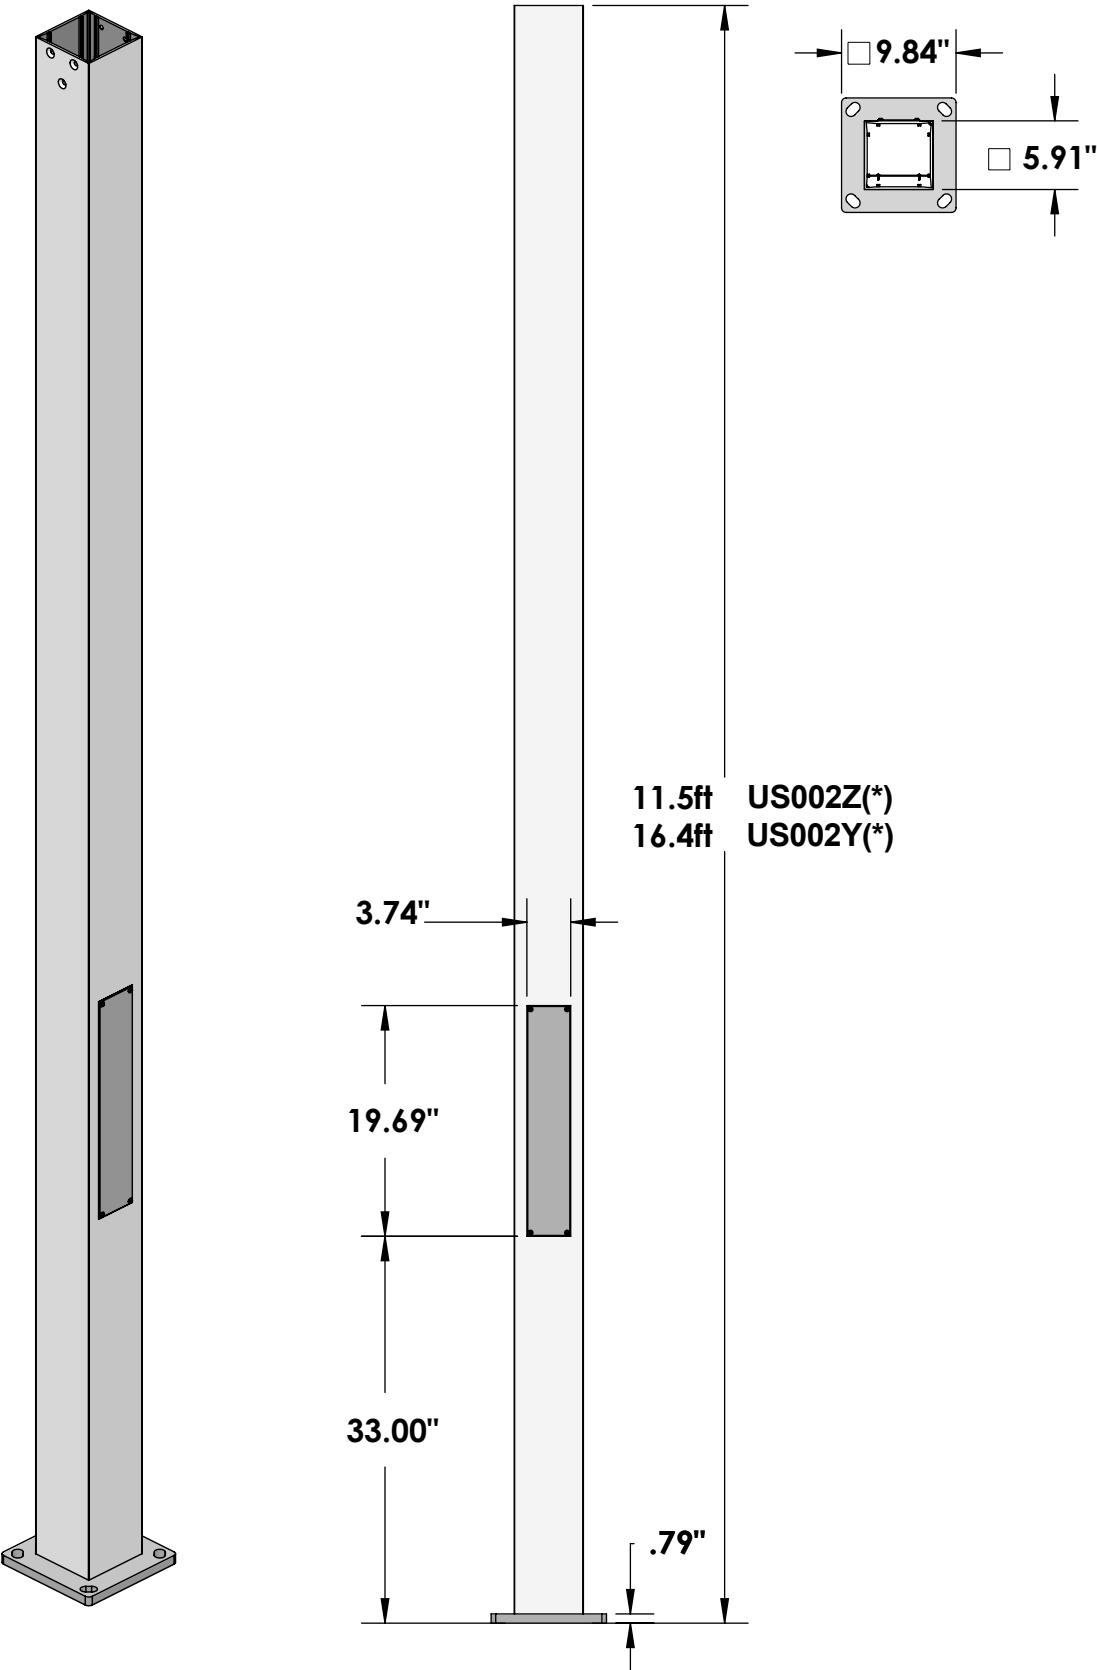


Pole Accessories Installation Cont.

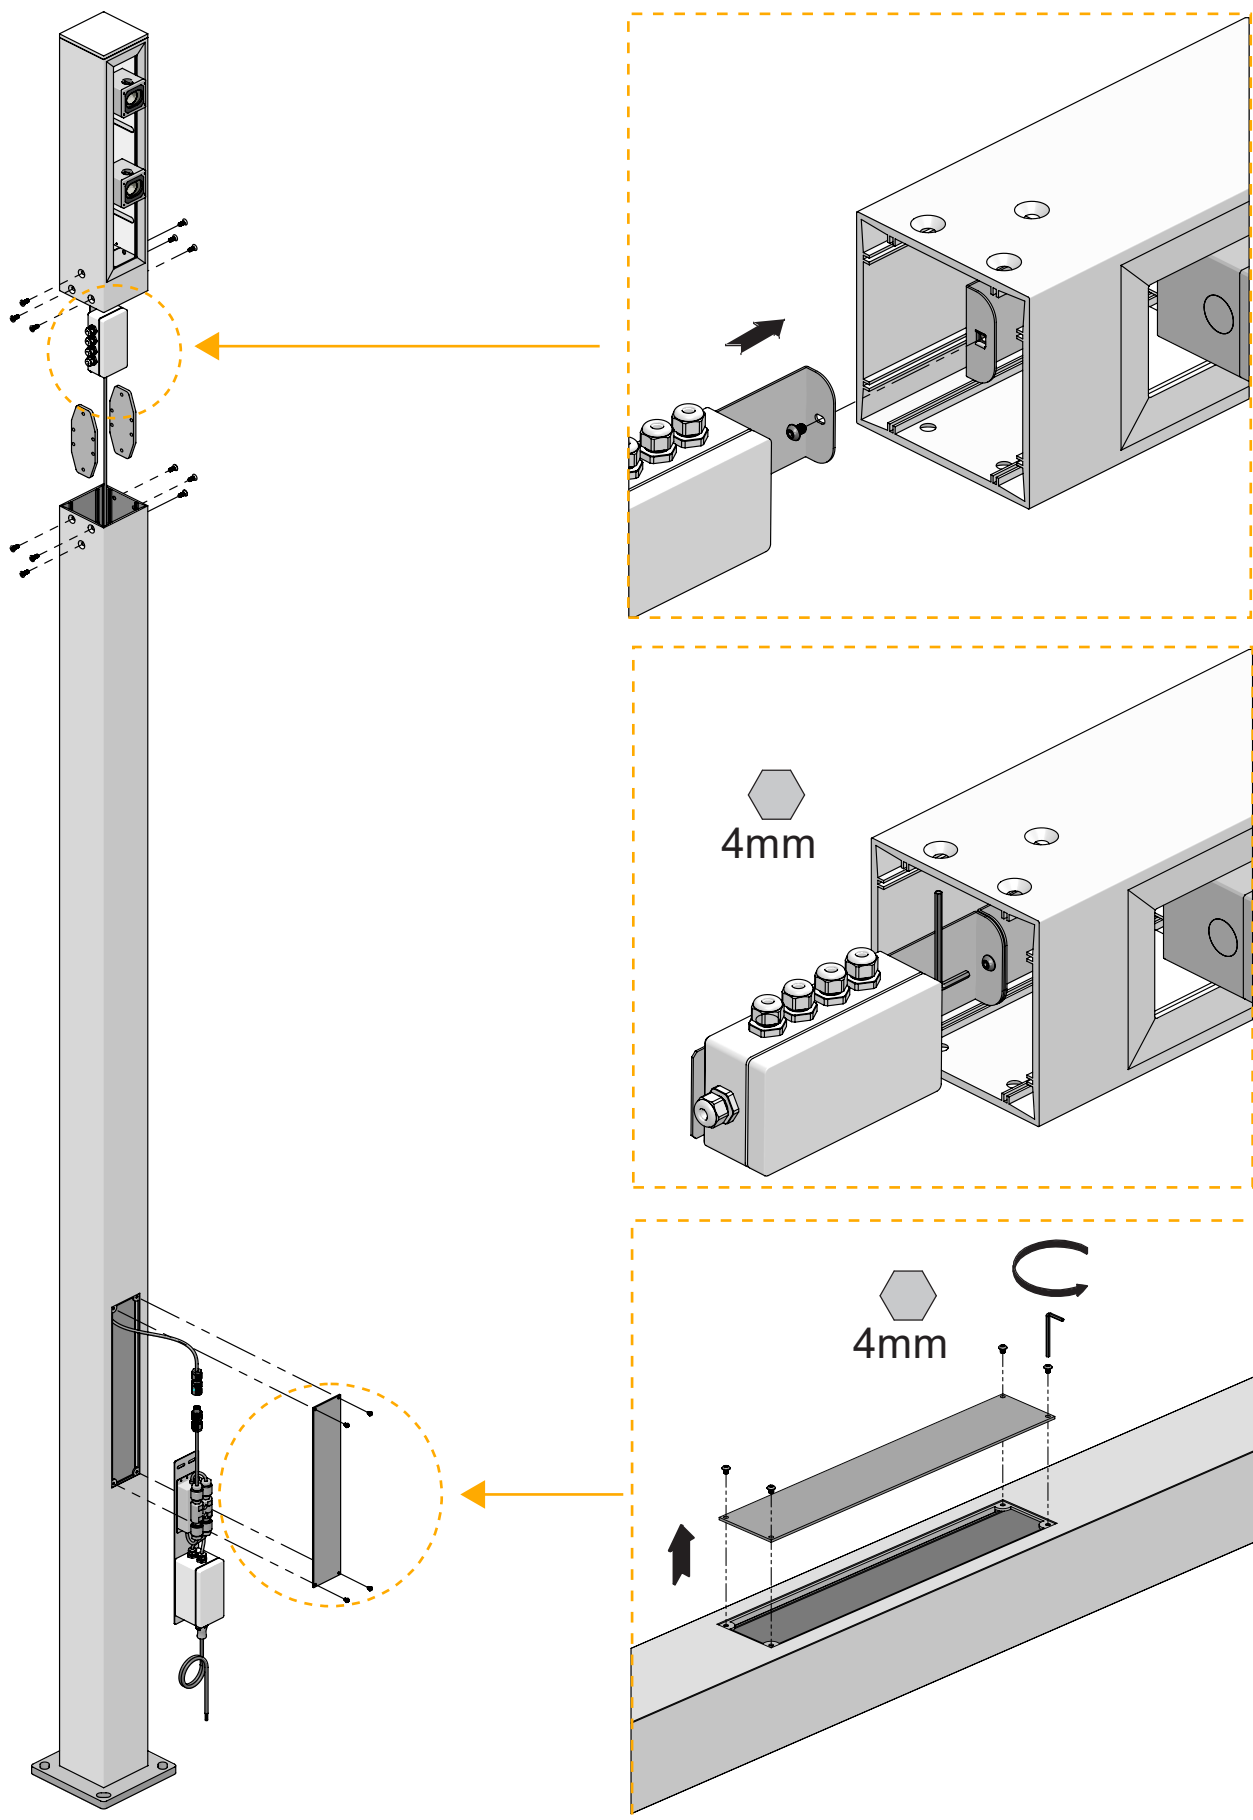

Pole Accessories Installation Cont.



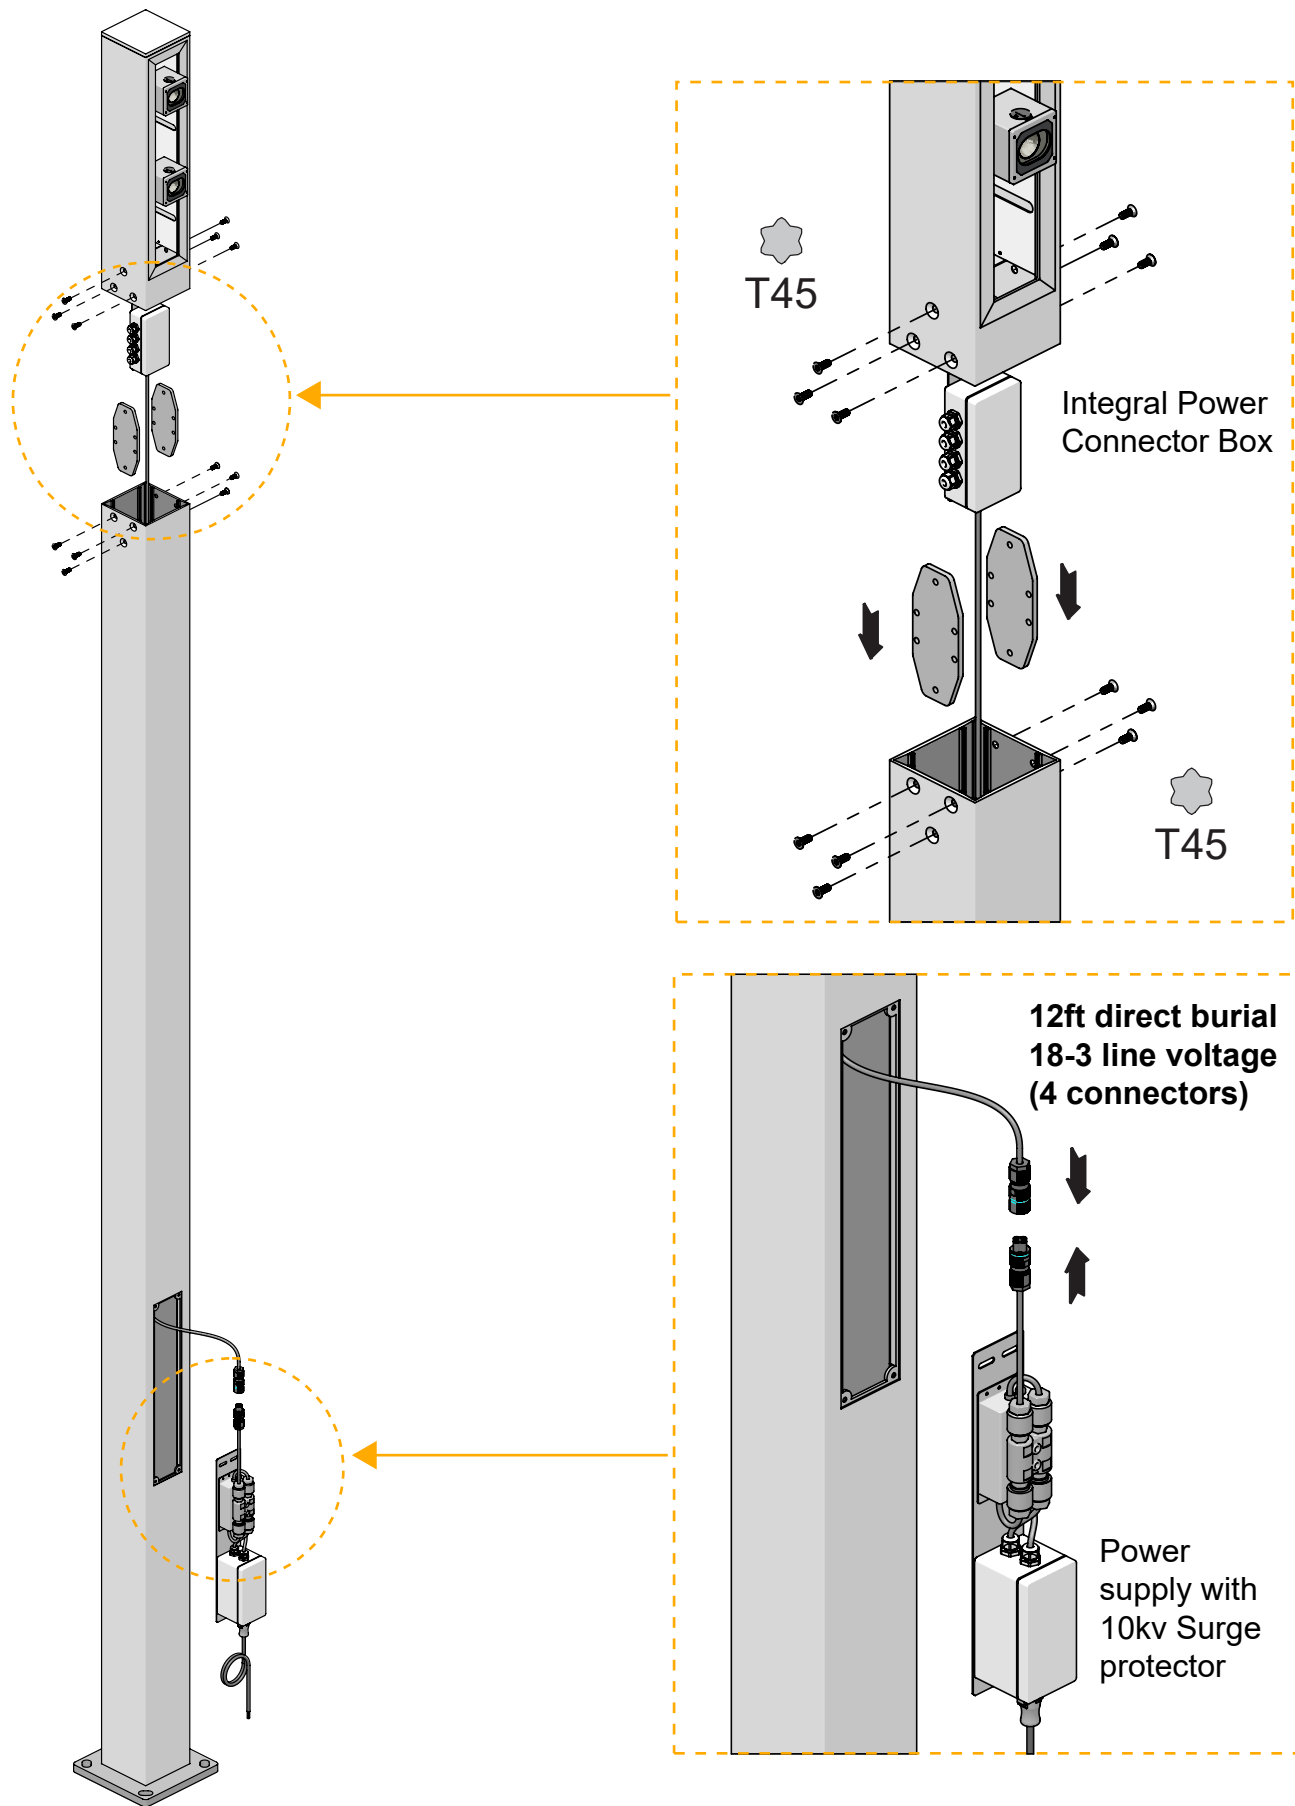


Pole Accessories Installation Cont.

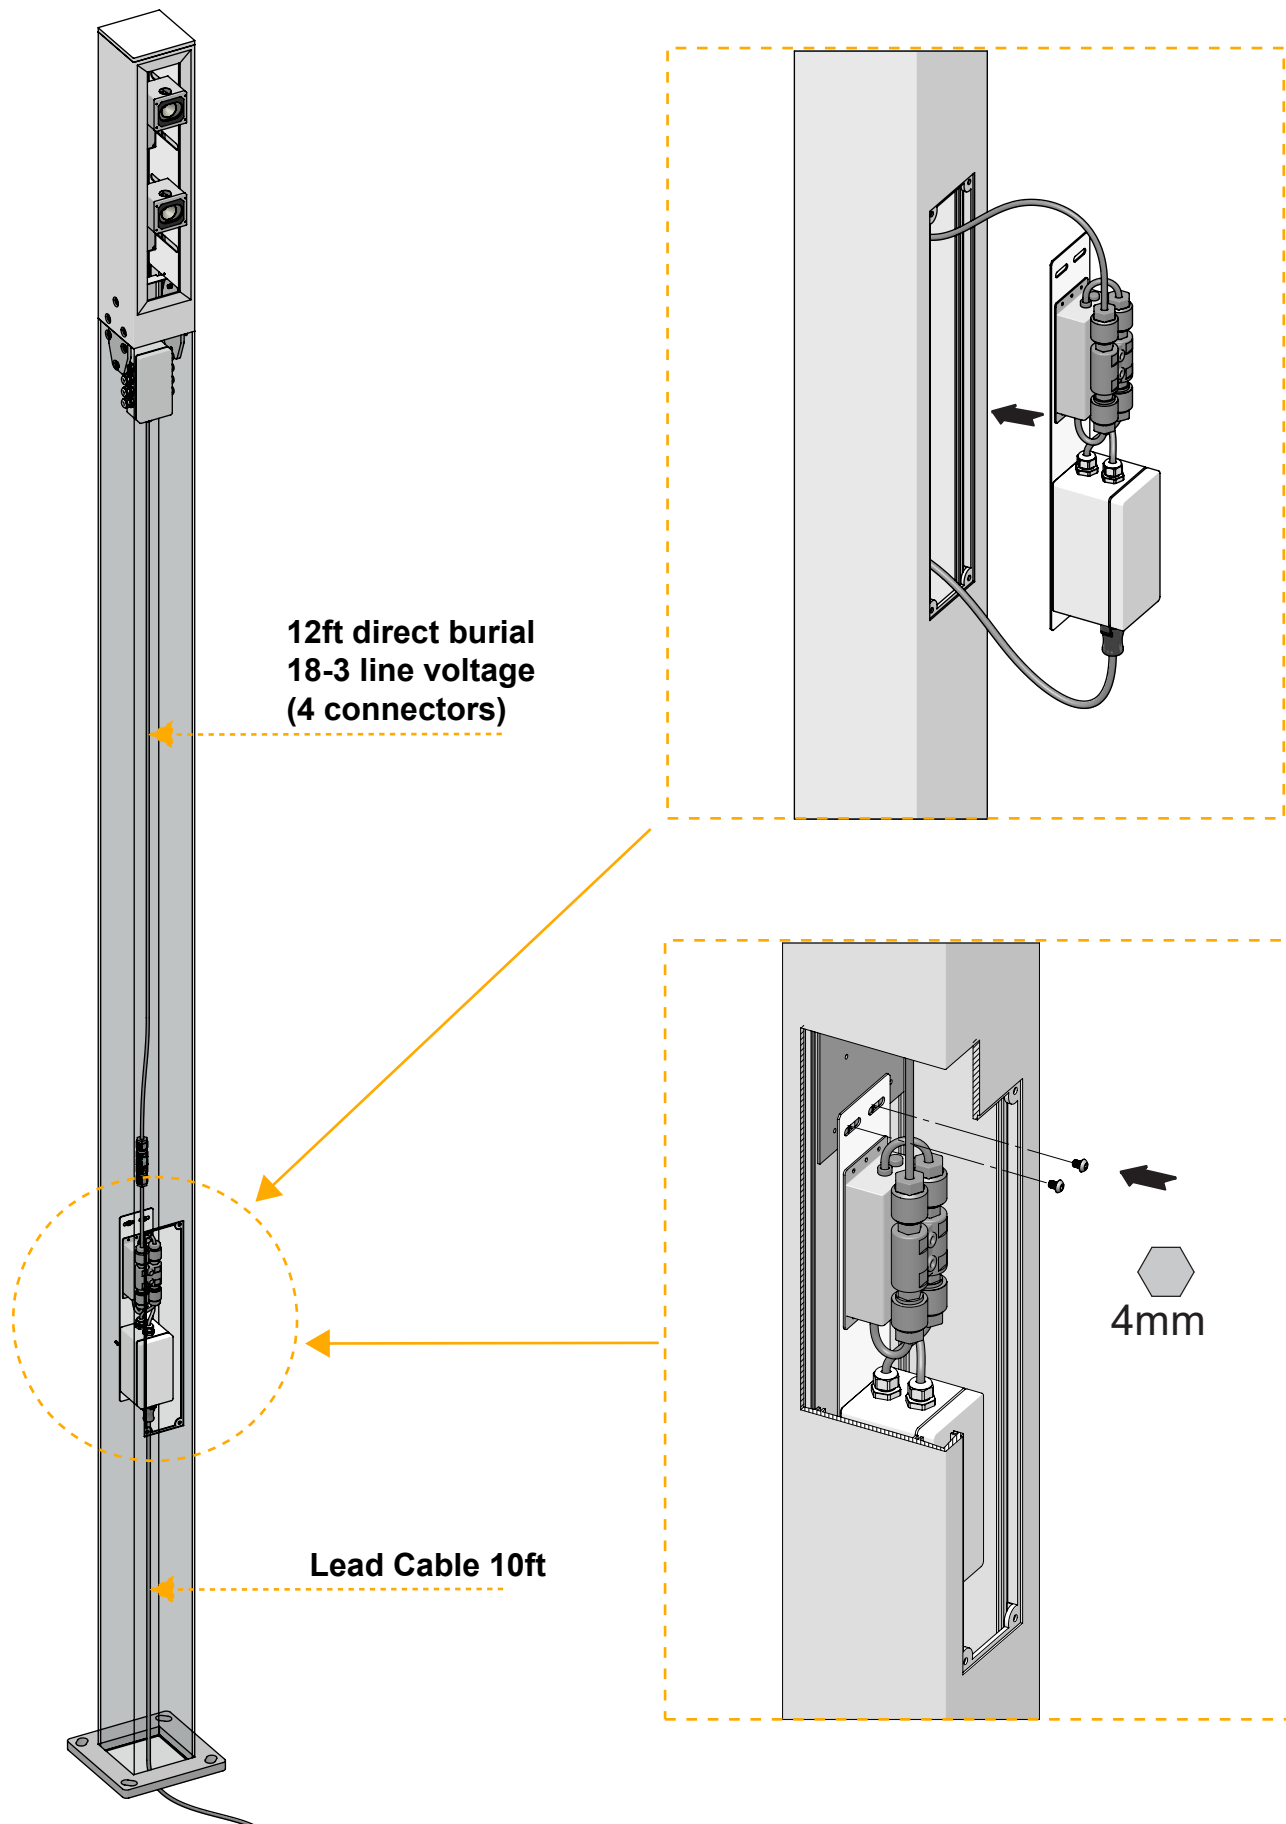



Pole Accessories Installation Cont.

1USE001A

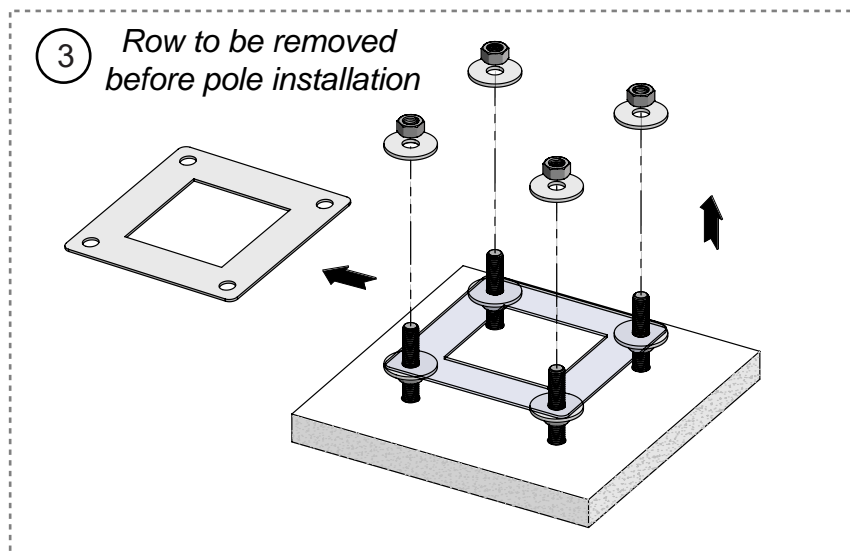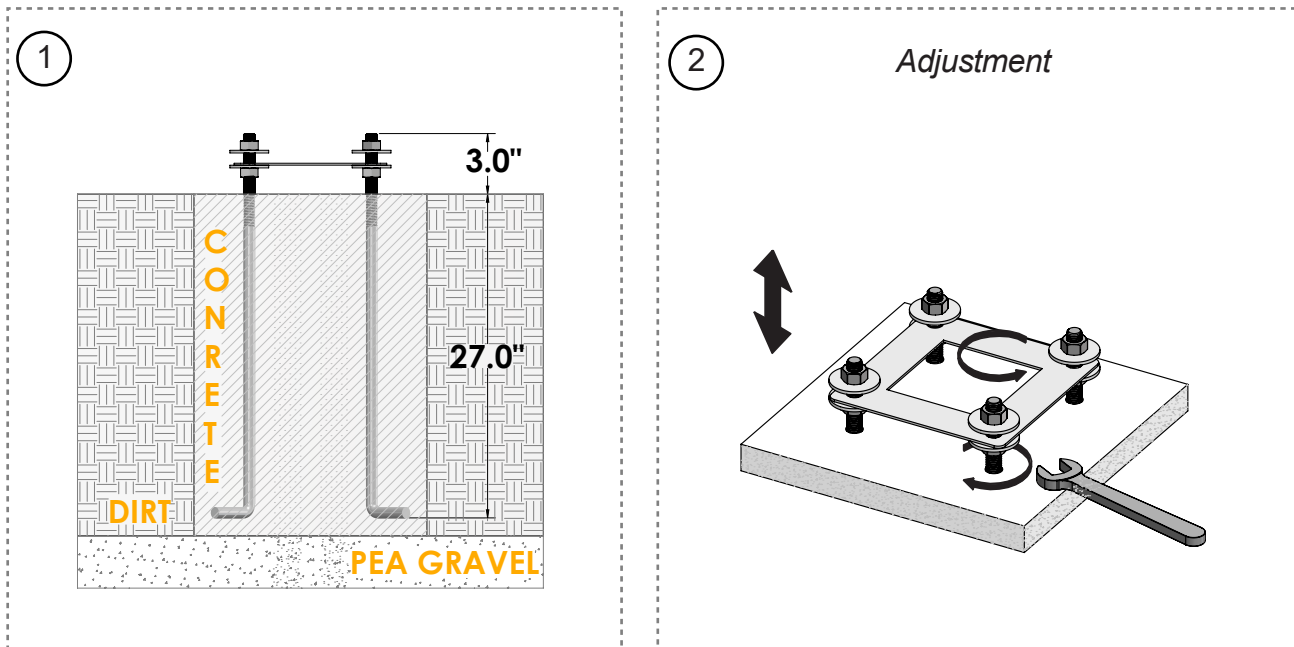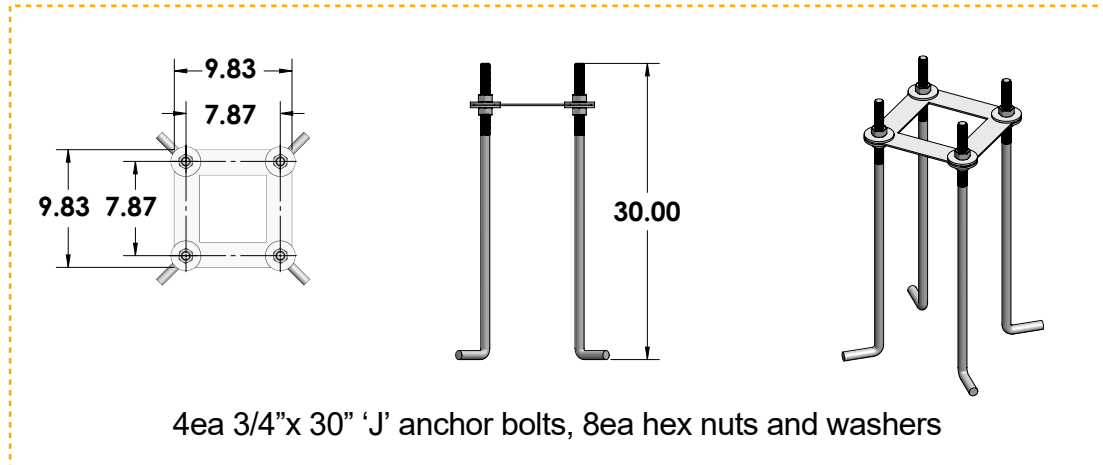


Pole Accessories Installation Cont.

1USE001A

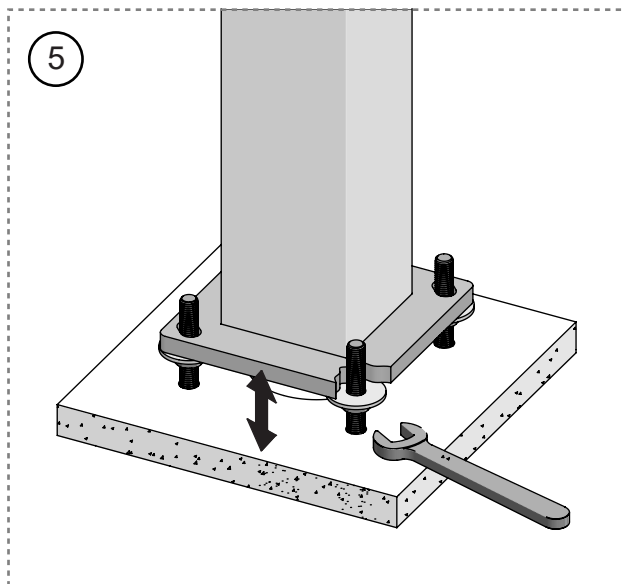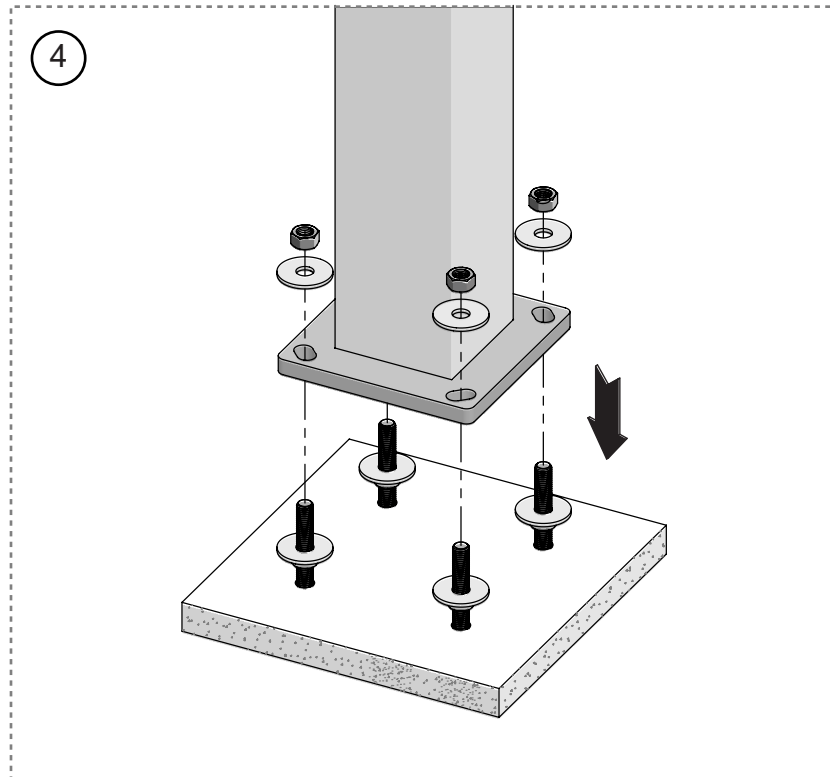




Adjustment

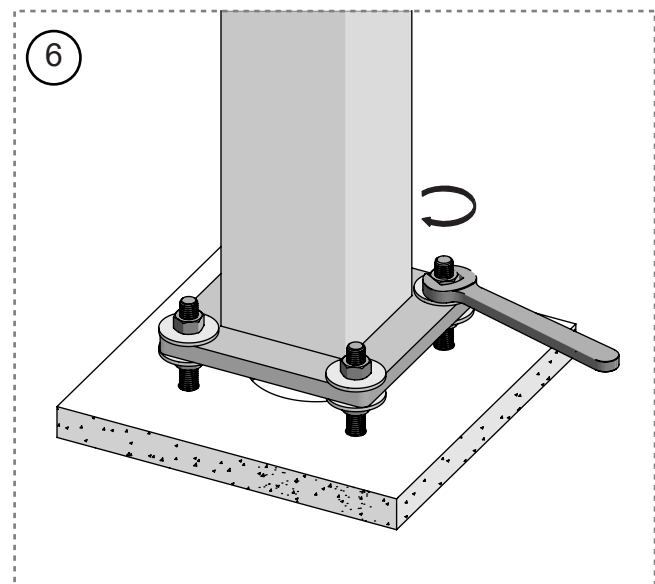


Lock

Cover Accessory Installation

A010A(*)



1

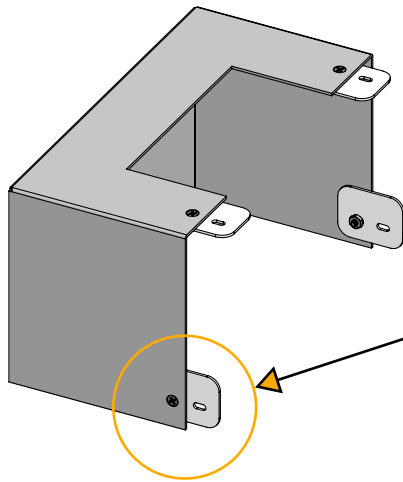


8-32 Hex Nut

x4


x4

8-32 Screw

2

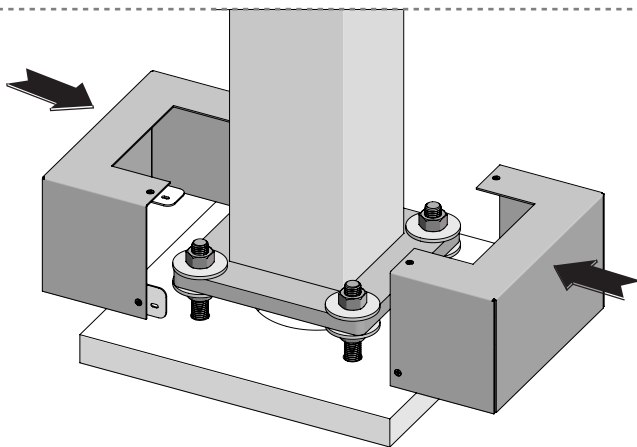

3

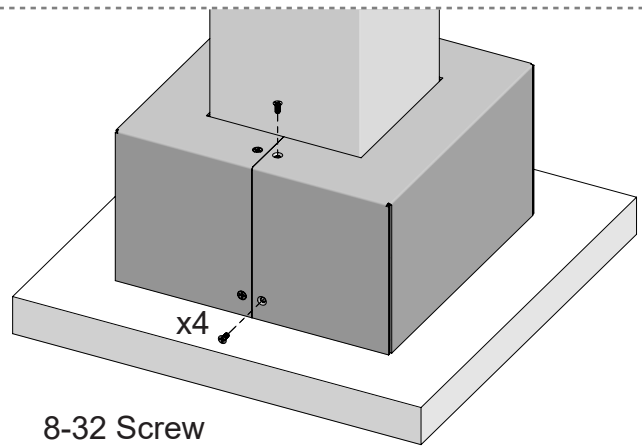

x4

8-32 Screw


Pole Accessories Installation Cont.

Fixture Aiming

Maximum Flexibility

Every luminaire has the ability to be shifted to either side of the pole and rotated by 359° vertical tilt rotation with variable luminaire positions, flush or extracted.





In addition, each luminaire optic can be externally rotated by +/-20° horizontal pan rotation for ultimate flexibility.

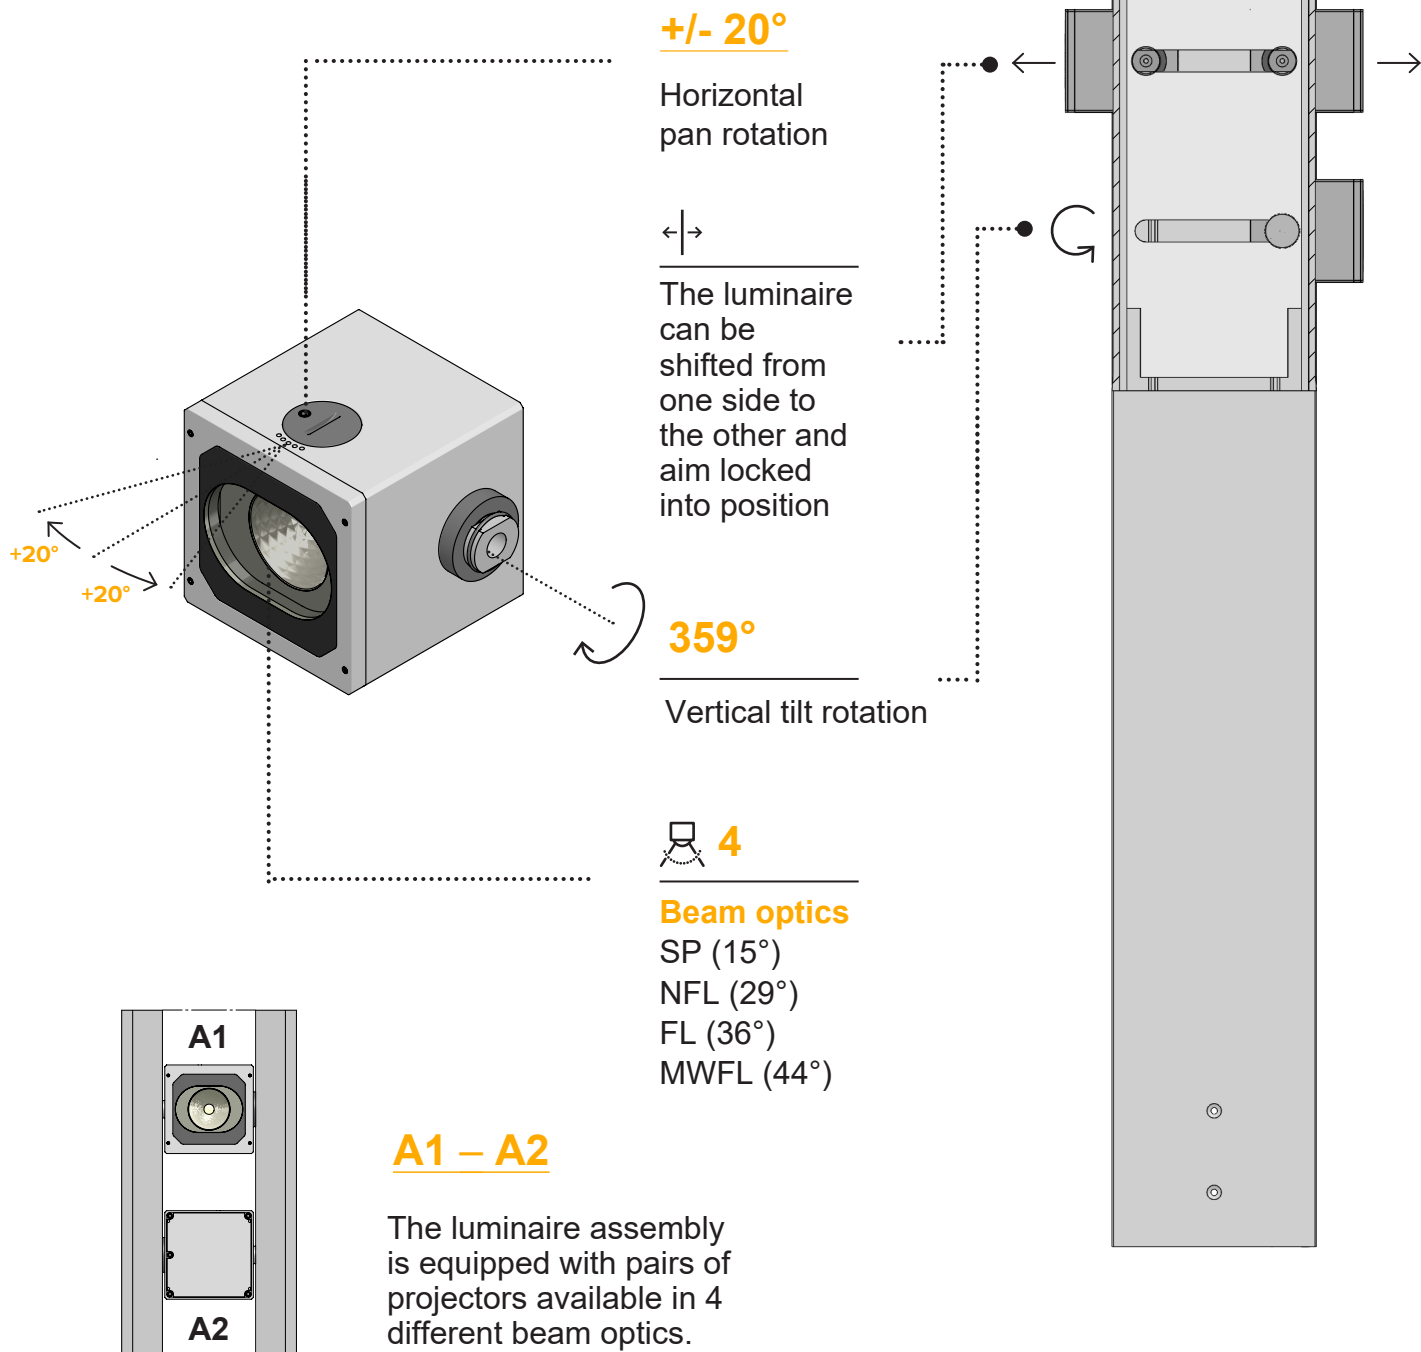

Pole Accessories Installation Cont.


Accessory Collar

USCLR06 (*)

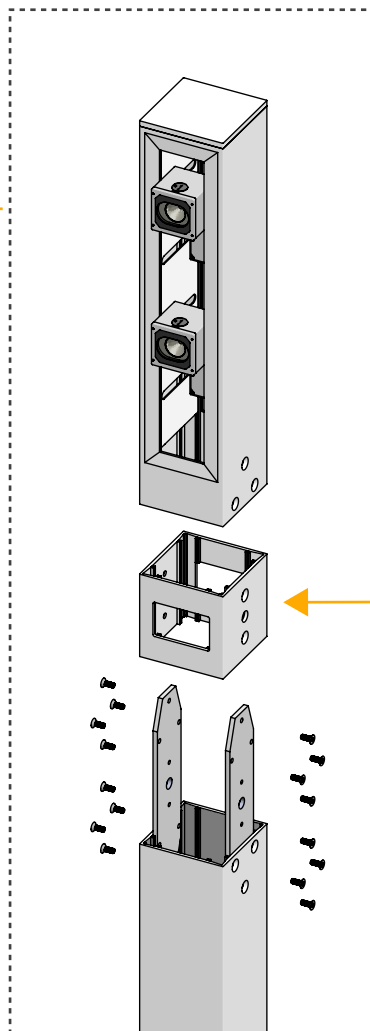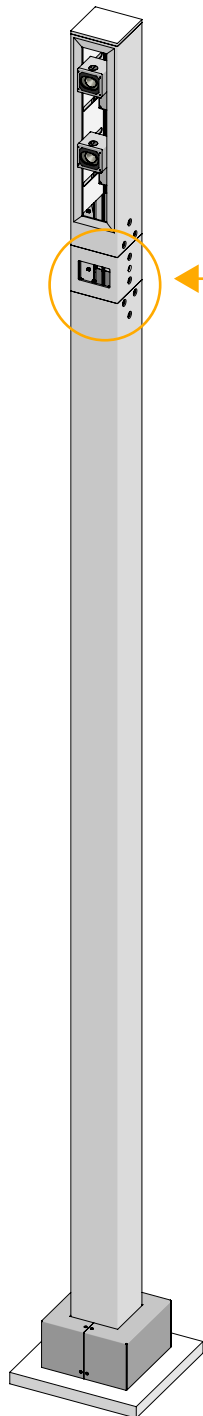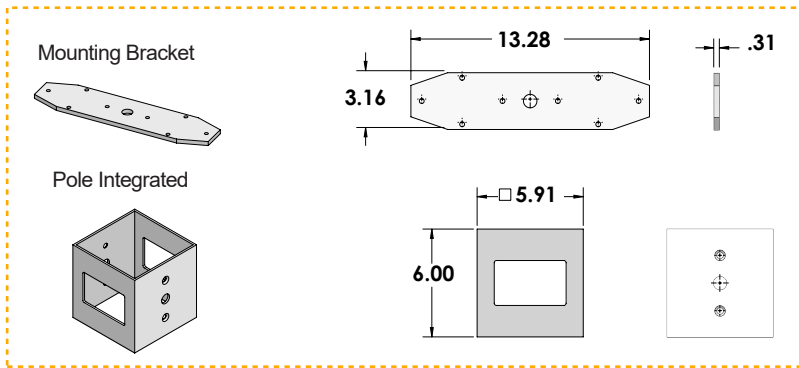


1USCAM01

Integral angled IP67 wall plate camera



1USSNS01BK 1USSNS01WH

Integral 2-in-1 motion sensor and photo cell




FACTORY CONSULT

Fusion® XS coaxial speaker

CONSULT FACTORY FOR COLLAR
RELATED ACCESSORIES AND
MOUNTING CONFIGURATIONS.

Pole Diagram

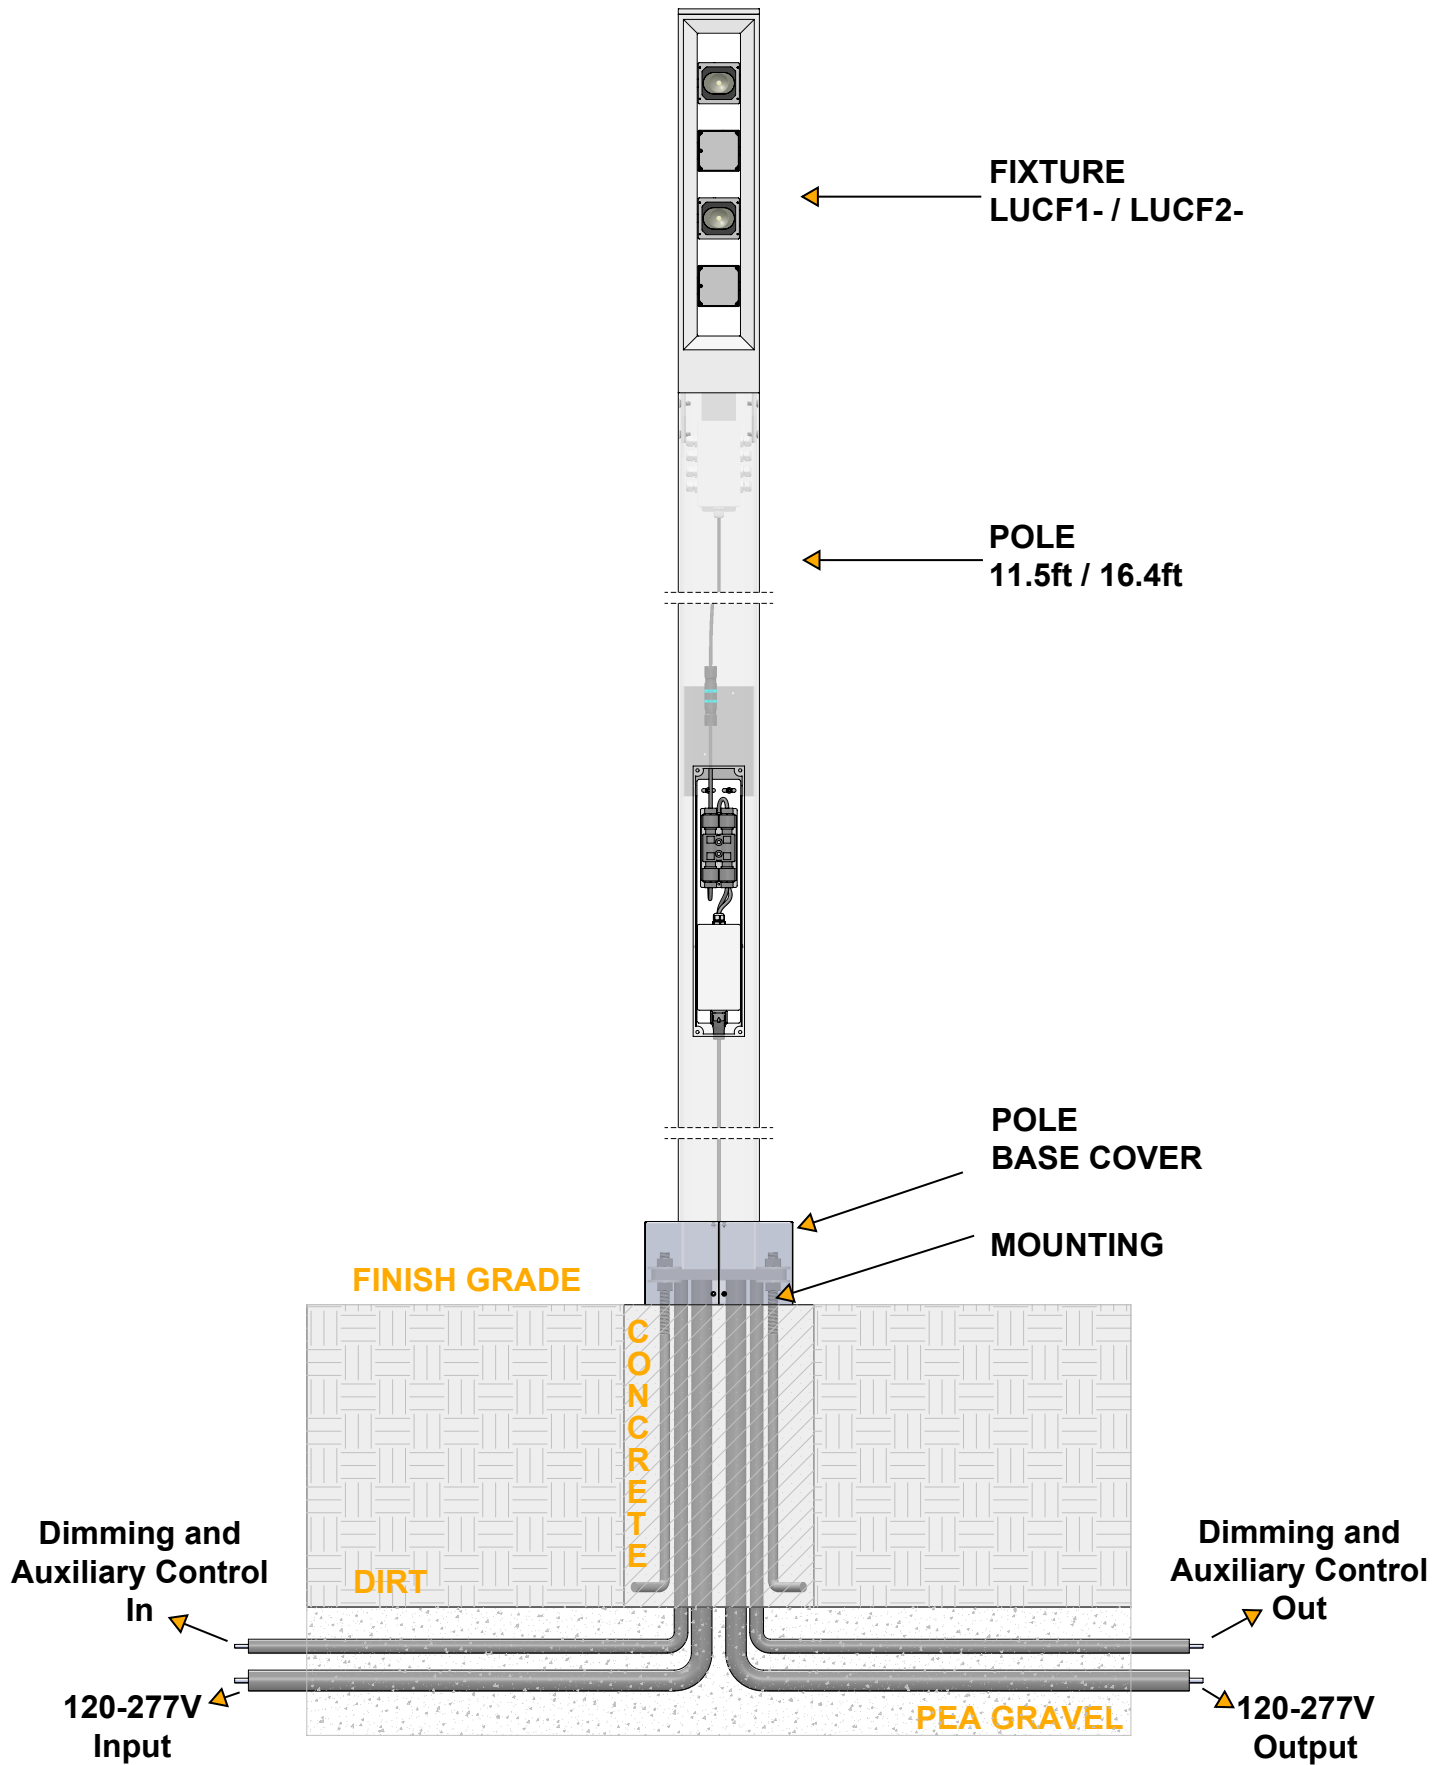

Maintenance

This fixture was designed and manufactured for a durable, long lasting use with minimum care. To ensure the maximum lifespan of this product, we encourage our customers to provide a quality visual inspection of the fixture and installation accessories every six months. If there are any visible signs of issues (i.e moisture or dust) during the inspection, please clean any of the dust or moisture with a soft cloth and check to make sure that all fixtures are still operating normally. If there are any issues regarding the fixture please contact us as we will assist the situation at hand.

Support

Any questions, problems, or comments you have please feel free to contact our Customer Service department during our business hours Monday-Friday 8am-5pm via: Email: usaorders@targetti.com Phone: (714) 513-1991

Visit our website: <http://www.targettiusa.com>