


JEDI PROJECTOR RGBW 'Q'

Powerful Adjustable Linear LED Projector



JEDI PROJECTOR RGBW

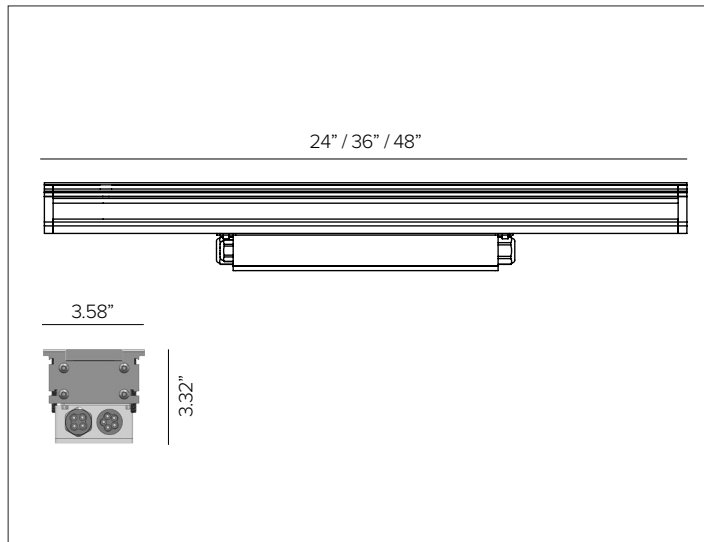

CONCEPT

Powerful adjustable linear dynamic color changing LED projector flood light.

MECHANICAL CHARACTERISTICS

Housing	3.58"W x 3.47"D
Materials	Extruded 15μ anodized aluminum body and black end caps with extra clear 4mm glass with stainless steel AISI 316 border trim, optional anti-slip silk screen glass. Driver housed in black metal box on underside of fixture.
Finish	<input type="radio"/> Brushed Natural <input type="radio"/> Bronze PVD* <input type="radio"/> Black PVD* *Physical Vapor Deposition, available upon request.
Power Connection	Pre-cabled with 1ea 18-3 line voltage and Belden 3105A data cables with IP68 quick disconnects. Lead and Solo configurations provided with 10ft lead cables.
Mounting	To be completed with stainless steel fixed and adjustable brackets that slide along the luminaire body to the desired position.
Weight	7.7lbs (24") / 9lbs (36") / 15lbs (48")
Protection	IP67
Impact	IK08

CERTIFICATIONS

cULus listed Wet Location Listed E477426
 Tested in accordance with LM-79-08
 Compliant for California installations.
 RoHS3 EU 215/863

WARRANTY

5 year limited warranty
^A Fixture body complete with marine grade cataphoresis suitable for use in marine grade environments. Stainless Steel trim brushed finished surfaces may need to be cleaned occasionally to prevent collection of mineral deposits. Not to be in direct contact with salt or corrosive agents for extended periods of time.

SUSTAINABILITY

Luminaire designed for disposal/recycling at end-of-life. Replaceable LED light source and control gear by a Targetti technician.

ELECTRICAL CHARACTERISTICS

Power Supply	Integral electronic driver, DMX 512 protocol. 0% dim range. Refer to Targetti Onsite Services for additional programming and installation support.
Wattage	28W (24"L) / 41W (36"L) / 55W (48"L) nominal / 4Ch
Voltage	Universal Voltage 120-277V AC 50/60Hz
Ambient Temp.	-25°C / +35°C (95°F)

SOURCE

High efficiency Quad Chip LED emitter.

TM30	CCT (Nominal)	SDCM
	RGBW 3000K	2

OPTIC

Optical system is comprised of a primary cylindrical glass lens and a high reflectance anodized aluminum reflector with an integrated holographic filter.

Beam	WW 20°x69°	WG 17°x80°	FL 35°x88°
Delivered Lumens			
<i>Data represents 48"L</i>			
RGBW	2,769Lm	2,838Lm	2,698Lm
RGB	1,578Lm	1,617Lm	1,537Lm
RED	485Lm	497Lm	472Lm
GREEN	994Lm	1,019Lm	968Lm
BLUE	195Lm	199Lm	189Lm
3000K	1,349Lm	1,383Lm	1314Lm

Refer to photometry section for all fixture variations.

Efficacy	97Lm/W max. Refer to photometric graphs for specific values.
Lifetime	L80/B10 60,000hrs at max TA +25°C
Photobiological Classification	Low risk safety RG1


JEDI PROJECTOR RGBW 'Q'

SPECIFICATION INFORMATION

JE		P										
1	2	3	4	5	6	7	8	9	10	11	12	
Ex: JEPDXWW24QCS / 1E2752							REQUIRED	OPTIONAL				


1 - PRODUCT CODE	2 - TYPE	3 - DRIVER	4 - OPTICS	5 - LENGTH	6 - KELVIN	7 - CABLE
JE — JEDI	P — Projector	DX — DMX	WW — WW 20°x69° WG — WG 17°x80° FL — FL 35°x88°	24 — 24" 36 — 36" 48 — 48"	QC — RGBW Quad	L — Lead C — Center E — End S — Solo
8 - MOUNTING	9 - SIDE COVER	10 - ADDITIONAL LEAD CONNECTION CABLE		11 - JUMPER CONNECTION CABLE	12 - CONTROL	
Short Bracket See section for details Long Bracket See section for details Surface Mount See section for details Wall Flush Mount See section for details	Side Cover See section for details Anti-Glare Side Cover See section for details End Cap See section for details	Additional Lead Cable See section for details		Additional Jumper Cable See section for details	Controller See section for details	

OPTIC VERSIONS

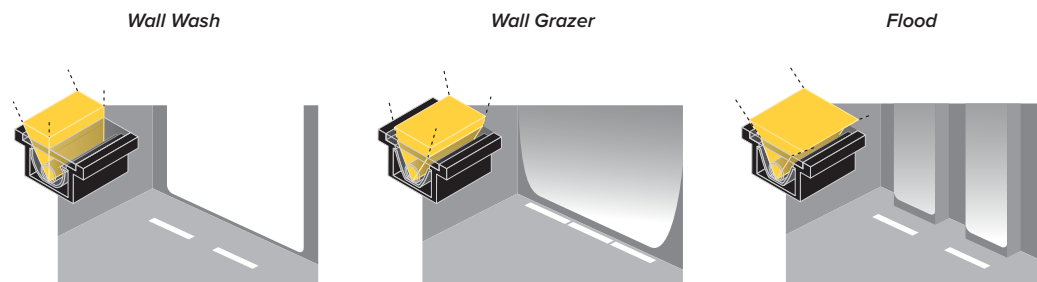


JEDI PROJECTOR RGBW 'Q'

7 – CABLE

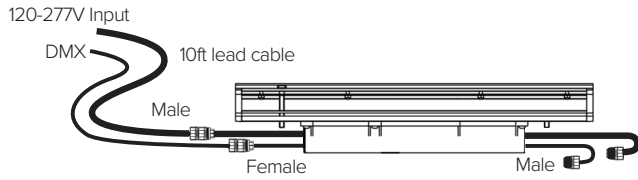


Lead - prewired input/output 10ft 18-3 line voltage and 18-2 data lead cables with IP68 quick disconnects included.

Part No. **L**




Center - prewired input/output for inline connections with 18-3 line voltage and 18-2 data lead cables with IP68 quick disconnects included.

Part No. **C**



End - prewired input for inline connections with 18-3 line voltage and 18-2 data lead cables with IP68 quick disconnects included.


Part No. **E**

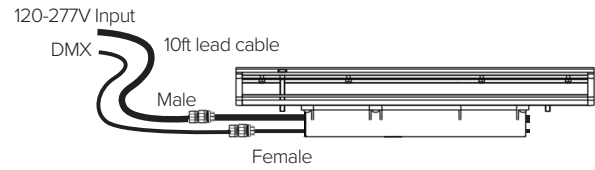

Solo - prewired input 10ft 18-3 line voltage and 18-2 data lead cables with IP68 quick disconnects included.


Part No. **S**

8 – MOUNTING (REQUIRED)

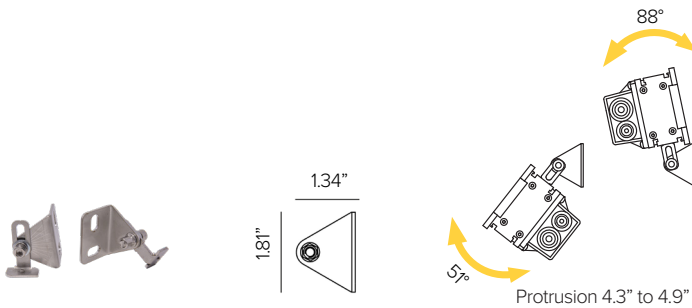


JEDI short stainless steel surface mounting bracket, set of two.

Part No. **1E2752**

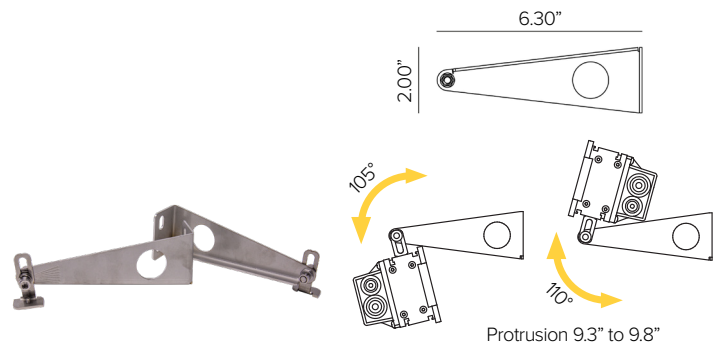


JEDI long stainless steel surface mounting bracket, 2ea.

Part No. **1E2753**

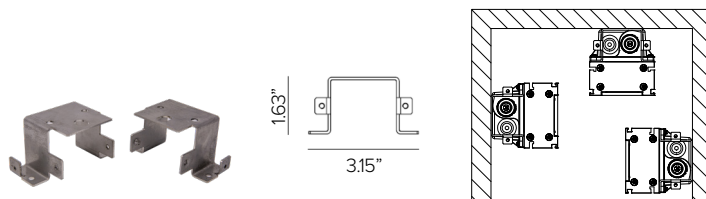

JEDI surface mounting bracket, 2ea.

Part No. **1E2754**

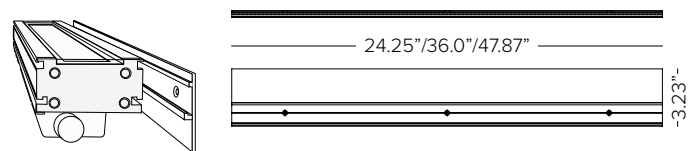


JEDI flush mount bracket with countersink screw holes for attachment.

Length	24.25"	36.00"	47.87"
Part No.	1DU2755	1DU2756	1DU2757


JEDI PROJECTOR RGBW 'Q'

9 – SIDE COVER (OPTIONAL)

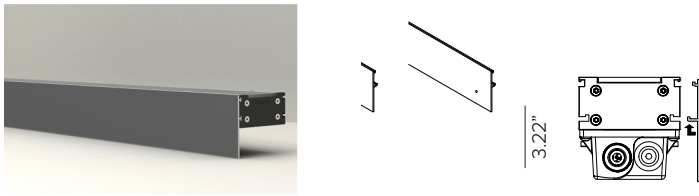

JEDI anodized aluminum side cover mounts flush with to the top of the fixture. Side cover option allows for a fluid finished appearance that can be field painted to match the architectural finish. **Required with use of 1E2761.**

Length	24.25"	36.00"	47.87"
Part No.	1E2755	1E2756	1E2757

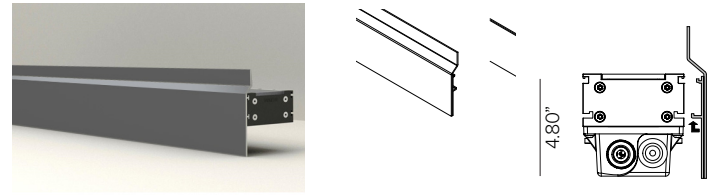

JEDI anodized aluminum anti-glare side cover mounts with a slight standoff to eliminate glare for direct view applications. Side cover option allows for a fluid finished appearance that can be field painted to match the architectural finish. **Required with use of 1E2761.**

Length	24.25"	36.00"	47.87"
Part No.	1E2758	1E2759	1E2760



JEDI end cap, 1ea. **To be completed with side cover option. Not compatible with use of 1E2754.**

Part No. **1E2761**

10 – ADDITIONAL LEAD CONNECTION CABLE (OPTIONAL)



JEDI RGBW additional lead cable kit. Includes 1ea 18-3 line voltage and Belden 3105A data cables with IP68 quick disconnects.

Length	10ft	25ft	50ft
Part No.	JEQDXLEAD-10	JEQDXLEAD-25	JEQDXLEAD-50

11 – ADDITIONAL JUMPER CONNECTION CABLE (OPTIONAL)







JEDI RGBW jumper cable kit. Includes 1ea 18-3 line voltage and Belden 3105A data cables with IP68 quick disconnects.

Length	5ft	10ft	25ft
Part No.	JEQDXJUMP-05	JEQDXJUMP-10	JEQDXJUMP-25

JEDI PROJECTOR RGBW 'Q'

12 – CONTROL (OPTIONAL)


Part No.		Channels	Scenes	Zones	Rating	Voltage	Certification	Dimensions	Description
TGDMXSLESAU9		256	20	1	Indoor	5.5V DC	ETL, UL	5.3"W x 5.5"H x 1.9D	Nicolaudie Slesa smart DMX 1/2 universe programmable controller with easy to use software interface.
TGDMXSLESAU11		1024	99	5	Indoor	5VDC 120V AC <i>Plug in power supply included</i>	ETL	6.3" x 3.6" x 1.8"	Nicolaudie Slesa smart DMX interface, 2 DMX 512 universes, intuitive backlit keyboard programmable controller with easy to use software interface.
TGDMXSTICKDE3B		1024	500	10	Indoor	6-7V DC 120V AC <i>Plug in power supply included</i>	ETL	5.8" x 4.2" x 0.5"	Nicolaudie intelligent control keypad with glass touch sensitive graphic display, stand-alone DMX 512, 2 universe programmable controller with easy to use software interface. Black finish.
TGDMXSTICKDE3W		1024	500	10	Indoor	6-7V DC 120V AC <i>Plug in power supply included</i>	ETL	5.8" x 4.2" x 0.5"	Nicolaudie intelligent control keypad with glass touch sensitive graphic display, stand-alone DMX 512, 2 universe programmable controller with easy to use software interface. White finish.



USB-RDM Programmer code. DMX-RDM (Remote Device Management) address planner. Used with the "RDM Targetti" software that can be [downloaded for free from the Targetti USA website](#). To be used with all RGBW products. The USB-RDM programmer manages to direct DMX-RDM fixtures if there are no BUFFER or Splitter DMX on the section.

Part No. **1E2767**

WIRING DIAGRAM

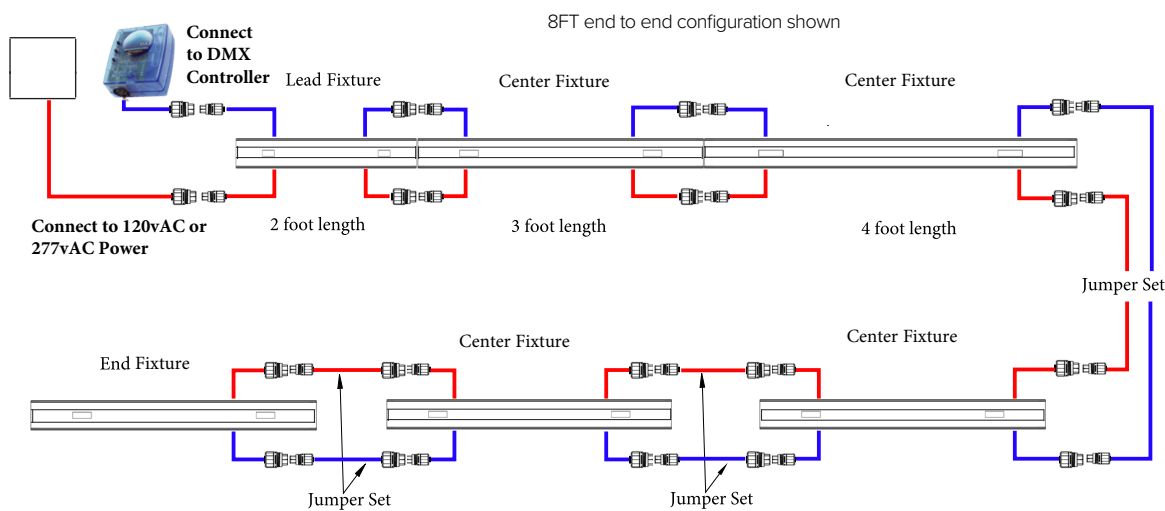

JEDI PROJECTOR RGBW 'Q'

PHOTOMETRY

24" WALL WASHER / RED




		H(m)	D1(m)	D2(m)	Emax(lx)
			20°	69°	
Fixture Power	5W	1	0.38	1.42	289
Source Flux	314lm	2	0.75	2.84	72
Fixture Flux	242lm	3	1.13	4.26	32
Efficacy	46lm/W	4	1.51	5.68	18
TS1776	Imax=1008cd/klm	Imax	316cd	5	1.89 7.11 12

24" WALL WASHER / GREEN



		H(m)	D1(m)	D2(m)	Emax(lx)
			20°	69°	
Fixture Power	7W	1	0.38	1.42	593
Source Flux	644lm	2	0.75	2.84	148
Fixture Flux	497lm	3	1.13	4.26	66
Efficacy	67lm/W	4	1.51	5.68	37
TS1776	Imax=1008cd/klm	Imax	649cd	5	1.89 7.11 24

24" WALL WASHER / BLUE

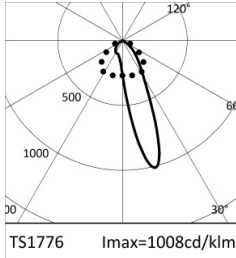


		H(m)	D1(m)	D2(m)	Emax(lx)
			20°	69°	
Fixture Power	7W	1	0.38	1.42	116
Source Flux	126lm	2	0.75	2.84	29
Fixture Flux	97lm	3	1.13	4.26	13
Efficacy	13lm/W	4	1.51	5.68	7
TS1776	Imax=1008cd/klm	Imax	127cd	5	1.89 7.11 5

24" WALL WASHER / RGB




		H(m)	D1(m)	D2(m)	Emax(lx)
			20°	69°	
Fixture Power	20W	1	0.38	1.42	942
Source Flux	1022lm	2	0.75	2.84	235
Fixture Flux	789lm	3	1.13	4.26	105
Efficacy	40lm/W	4	1.51	5.68	59
TS1776	Imax=1008cd/klm	Imax	1030cd	5	1.89 7.11 38

24" WALL WASHER / RGBW

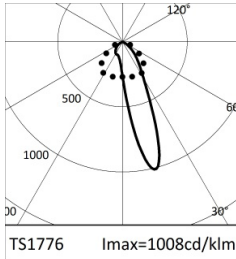

		H(m)	D1(m)	D2(m)	Emax(lx)
			20°	69°	
Fixture Power	28W	1	0.38	1.42	1653
Source Flux	1794lm	2	0.75	2.84	413
Fixture Flux	1385lm	3	1.13	4.26	184
Efficacy	50lm/W	4	1.51	5.68	103
TS1776	Imax=1008cd/klm	Imax	1808cd	5	1.89 7.11 66

24" WALL WASHER / WHITE

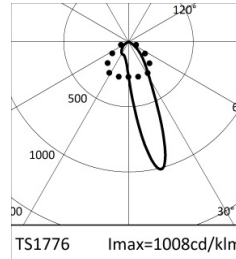


	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
			20°	69°	
Fixture Power	7W	1	0.38	1.42	805
Source Flux	874lm	2	0.75	2.84	201
Fixture Flux	675lm	3	1.13	4.26	89
Efficacy	94lm/W	4	1.51	5.68	50
TS1776	Imax=1008cd/klm	Imax	881cd	5	1.89 7.11 32

36" WALL WASHER / RED



		H(m)	D1(m)	D2(m)	Emax(lx)
			20°	69°	
Fixture Power	8W	1	0.38	1.42	434
Source Flux	471lm	2	0.75	2.84	108
Fixture Flux	364lm	3	1.13	4.26	48
Efficacy	45lm/W	4	1.51	5.68	27
TS1777	Imax=1008cd/klm	Imax	475cd	5	1.89 7.11 17

36" WALL WASHER / GREEN

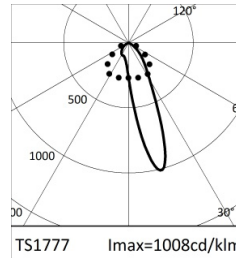

		H(m)	D1(m)	D2(m)	Emax(lx)
			20°	69°	
Fixture Power	11W	1	0.38	1.42	890
Source Flux	966lm	2	0.75	2.84	223
Fixture Flux	746lm	3	1.13	4.26	99
Efficacy	67lm/W	4	1.51	5.68	56
TS1777	Imax=1008cd/klm	Imax	973cd	5	1.89 7.11 36

36" WALL WASHER / BLUE




		H(m)	D1(m)	D2(m)	Emax(lx)
			20°	69°	
Fixture Power	11W	1	0.38	1.42	174
Source Flux	189lm	2	0.75	2.84	44
Fixture Flux	146lm	3	1.13	4.26	19
Efficacy	13lm/W	4	1.51	5.68	11
TS1777	Imax=1008cd/klm	Imax	190cd	5	1.89 7.11 7

36" WALL WASHER / RGB




		H(m)	D1(m)	D2(m)	Emax(lx)
			20°	69°	
Fixture Power	30W	1	0.38	1.42	1412
Source Flux	1533lm	2	0.75	2.84	353
Fixture Flux	1183lm	3	1.13	4.26	157
Efficacy	40lm/W	4	1.51	5.68	88
TS1777	Imax=1008cd/klm	Imax	1545cd	5	1.89 7.11 56

36" WALL WASHER / RGBW

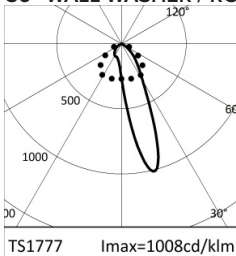

		H(m)	D1(m)	D2(m)	Emax(lx)
			20°	69°	
Fixture Power	41W	1	0.38	1.42	2479
Source Flux	2691lm	2	0.75	2.84	620
Fixture Flux	2077lm	3	1.13	4.26	275
Efficacy	50lm/W	4	1.51	5.68	155
TS1777	Imax=1008cd/klm	Imax	2712cd	5	1.89 7.11 99

36" WALL WASHER / WHITE

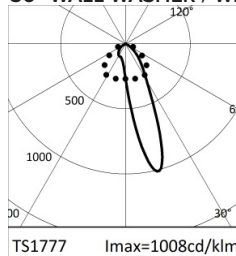

	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
			20°	69°	
Fixture Power	11W	1	0.38	1.42	1208
Source Flux	1311lm	2	0.75	2.84	302
Fixture Flux	1012lm	3	1.13	4.26	134
Efficacy	95lm/W	4	1.51	5.68	75
TS1777	Imax=1008cd/klm	Imax	1321cd	5	1.89 7.11 48

JEDI PROJECTOR RGBW 'Q'


PHOTOMETRY

48" WALL WASHER / RED



		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		20°	69°			
Fixture Power	11W	1	0.38	1.42	579		
Source Flux	628lm	2	0.75	2.84	145		
Fixture Flux	485lm	3	1.13	4.26	64		
Efficacy	45lm/W	4	1.51	5.68	36		
TS1778	I _{max} =1008cd/klm	I _{max}	633cd	5	1.89	7.11	23

48" WALL WASHER / GREEN

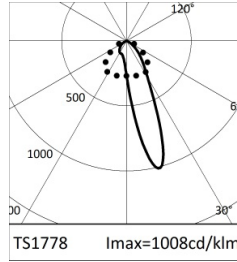

		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		20°	69°			
Fixture Power	15W	1	0.38	1.42	1187		
Source Flux	1288lm	2	0.75	2.84	297		
Fixture Flux	994lm	3	1.13	4.26	132		
Efficacy	67lm/W	4	1.51	5.68	74		
TS1778	I _{max} =1008cd/klm	I _{max}	1298cd	5	1.89	7.11	47

48" WALL WASHER / BLUE



		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		20°	69°			
Fixture Power	15W	1	0.38	1.42	232		
Source Flux	252lm	2	0.75	2.84	58		
Fixture Flux	195lm	3	1.13	4.26	26		
Efficacy	13lm/W	4	1.51	5.68	15		
TS1778	I _{max} =1008cd/klm	I _{max}	254cd	5	1.89	7.11	9

48" WALL WASHER / RGB



		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		20°	69°			
Fixture Power	40W	1	0.38	1.42	1883		
Source Flux	2044lm	2	0.75	2.84	471		
Fixture Flux	1578lm	3	1.13	4.26	209		
Efficacy	40lm/W	4	1.51	5.68	118		
TS1778	I _{max} =1008cd/klm	I _{max}	2060cd	5	1.89	7.11	75

48" WALL WASHER / RGBW




		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		20°	69°			
Fixture Power	55W	1	0.38	1.42	3306		
Source Flux	3588lm	2	0.75	2.84	826		
Fixture Flux	2769lm	3	1.13	4.26	367		
Efficacy	50lm/W	4	1.51	5.68	207		
TS1778	I _{max} =1008cd/klm	I _{max}	3615cd	5	1.89	7.11	132

48" WALL WASHER / WHITE




	3000K	H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		20°	69°			
Fixture Power	14W	1	0.38	1.42	1611		
Source Flux	1748lm	2	0.75	2.84	403		
Fixture Flux	1349lm	3	1.13	4.26	179		
Efficacy	94lm/W	4	1.51	5.68	101		
TS1778	I _{max} =1008cd/klm	I _{max}	1761cd	5	1.89	7.11	64

24" WALL GRAZER / RED

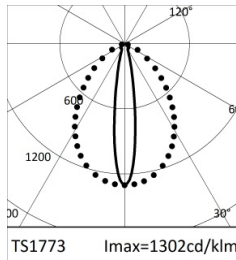


		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		17°	80°			
Fixture Power	5W	1	0.30	1.67	409		
Source Flux	314lm	2	0.59	3.34	102		
Fixture Flux	248lm	3	0.89	5.01	45		
Efficacy	47lm/W	4	1.18	6.69	26		
TS1773	I _{max} =1302cd/klm	I _{max}	409cd	5	1.48	8.36	16

24" WALL GRAZER / GREEN

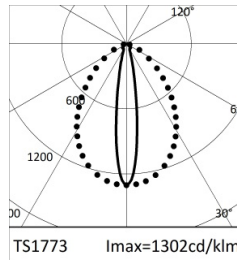


		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		17°	80°			
Fixture Power	7W	1	0.30	1.67	838		
Source Flux	644lm	2	0.59	3.34	210		
Fixture Flux	509lm	3	0.89	5.01	93		
Efficacy	69lm/W	4	1.18	6.69	52		
TS1773	I _{max} =1302cd/klm	I _{max}	838cd	5	1.48	8.36	34

24" WALL GRAZER / BLUE

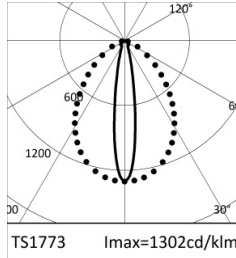

		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		17°	80°			
Fixture Power	7W	1	0.30	1.67	164		
Source Flux	126lm	2	0.59	3.34	41		
Fixture Flux	100lm	3	0.89	5.01	18		
Efficacy	14lm/W	4	1.18	6.69	10		
TS1773	I _{max} =1302cd/klm	I _{max}	164cd	5	1.48	8.36	7

24" WALL GRAZER / RGB

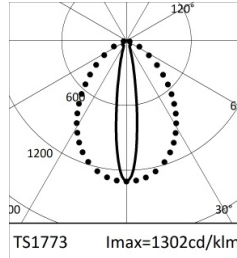


		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		17°	80°			
Fixture Power	20W	1	0.30	1.67	1331		
Source Flux	1022lm	2	0.59	3.34	333		
Fixture Flux	808lm	3	0.89	5.01	148		
Efficacy	41lm/W	4	1.18	6.69	83		
TS1773	I _{max} =1302cd/klm	I _{max}	1331cd	5	1.48	8.36	53

24" WALL GRAZER / RGBW



		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		17°	80°			
Fixture Power	28W	1	0.30	1.67	2336		
Source Flux	1794lm	2	0.59	3.34	584		
Fixture Flux	1419lm	3	0.89	5.01	260		
Efficacy	52lm/W	4	1.18	6.69	146		
TS1773	I _{max} =1302cd/klm	I _{max}	2336cd	5	1.48	8.36	93

24" WALL GRAZER / WHITE

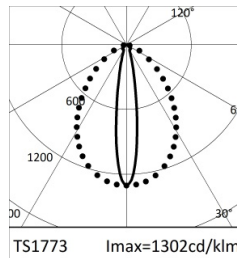

	3000K	H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		17°	80°			
Fixture Power	7W	1	0.30	1.67	1138		
Source Flux	874lm	2	0.59	3.34	284		
Fixture Flux	691lm	3	0.89	5.01	126		
Efficacy	96lm/W	4	1.18	6.69	71		
TS1773	I _{max} =1302cd/klm	I _{max}	1138cd	5	1.48	8.36	46

JEDI PROJECTOR RGBW 'Q'

PHOTOMETRY

36" WALL GRAZER / RED



		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	17°	80°			
Fixture Power	8W	1	0.30	1.67	613		
Source Flux	471lm	2	0.59	3.34	153		
Fixture Flux	373lm	3	0.89	5.01	68		
Efficacy	47lm/W	4	1.18	6.69	38		
TS1774	I _{max} =1302cd/klm	I _{max}	613cd	5	1.48	8.36	25

36" WALL GRAZER / GREEN



		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	17°	80°			
Fixture Power	11W	1	0.30	1.67	1258		
Source Flux	966lm	2	0.59	3.34	314		
Fixture Flux	764lm	3	0.89	5.01	140		
Efficacy	69lm/W	4	1.18	6.69	79		
TS1774	I _{max} =1302cd/klm	I _{max}	1258cd	5	1.48	8.36	50

36" WALL GRAZER / BLUE




		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	17°	80°			
Fixture Power	11W	1	0.30	1.67	246		
Source Flux	189lm	2	0.59	3.34	62		
Fixture Flux	150lm	3	0.89	5.01	27		
Efficacy	14lm/W	4	1.18	6.69	15		
TS1774	I _{max} =1302cd/klm	I _{max}	246cd	5	1.48	8.36	10

36" WALL GRAZER / RGB




		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	17°	80°			
Fixture Power	30W	1	0.30	1.67	1996		
Source Flux	1533lm	2	0.59	3.34	499		
Fixture Flux	1213lm	3	0.89	5.01	222		
Efficacy	41lm/W	4	1.18	6.69	125		
TS1774	I _{max} =1302cd/klm	I _{max}	1996cd	5	1.48	8.36	80

36" WALL GRAZER / RGBW

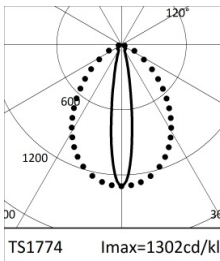


		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	17°	80°			
Fixture Power	41W	1	0.30	1.67	3504		
Source Flux	2691lm	2	0.59	3.34	876		
Fixture Flux	2129lm	3	0.89	5.01	389		
Efficacy	52lm/W	4	1.18	6.69	219		
TS1774	I _{max} =1302cd/klm	I _{max}	3504cd	5	1.48	8.36	140

36" WALL GRAZER / WHITE

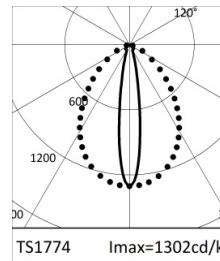


		3000K	H(m)	D1(m)	D2(m)	Emax(lx)	
		-	-	17°	80°		
Fixture Power	11W	1	0.30	1.67	1707		
Source Flux	1311lm	2	0.59	3.34	427		
Fixture Flux	1037lm	3	0.89	5.01	190		
Efficacy	97lm/W	4	1.18	6.69	107		
TS1774	I _{max} =1302cd/klm	I _{max}	1707cd	5	1.48	8.36	68

48" WALL GRAZER / RED

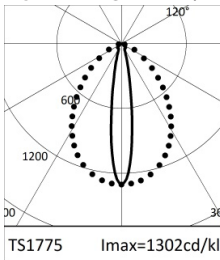

		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	17°	80°			
Fixture Power	11W	1	0.30	1.67	818		
Source Flux	628lm	2	0.59	3.34	204		
Fixture Flux	497lm	3	0.89	5.01	91		
Efficacy	46lm/W	4	1.18	6.69	51		
TS1775	I _{max} =1302cd/klm	I _{max}	818cd	5	1.48	8.36	33

48" WALL GRAZER / GREEN

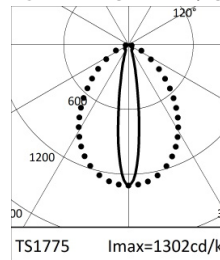


		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	17°	80°			
Fixture Power	15W	1	0.30	1.67	1677		
Source Flux	1288lm	2	0.59	3.34	419		
Fixture Flux	1019lm	3	0.89	5.01	186		
Efficacy	69lm/W	4	1.18	6.69	105		
TS1775	I _{max} =1302cd/klm	I _{max}	1677cd	5	1.48	8.36	67

48" WALL GRAZER / BLUE




		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	17°	80°			
Fixture Power	15W	1	0.30	1.67	328		
Source Flux	252lm	2	0.59	3.34	82		
Fixture Flux	199lm	3	0.89	5.01	36		
Efficacy	14lm/W	4	1.18	6.69	21		
TS1775	I _{max} =1302cd/klm	I _{max}	328cd	5	1.48	8.36	13

48" WALL GRAZER / RGB

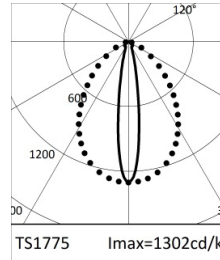


		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	17°	80°			
Fixture Power	40W	1	0.30	1.67	2661		
Source Flux	2044lm	2	0.59	3.34	665		
Fixture Flux	1617lm	3	0.89	5.01	296		
Efficacy	41lm/W	4	1.18	6.69	166		
TS1775	I _{max} =1302cd/klm	I _{max}	2661cd	5	1.48	8.36	106

48" WALL GRAZER / RGBW

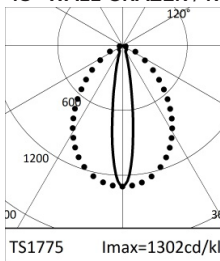

		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	17°	80°			
Fixture Power	55W	1	0.30	1.67	4671		
Source Flux	3588lm	2	0.59	3.34	1168		
Fixture Flux	2838lm	3	0.89	5.01	519		
Efficacy	52lm/W	4	1.18	6.69	292		
TS1775	I _{max} =1302cd/klm	I _{max}	4671cd	5	1.48	8.36	187

48" WALL GRAZER / WHITE

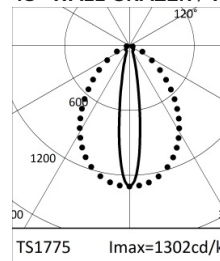

		3000K	H(m)	D1(m)	D2(m)	Emax(lx)	
		-	-	17°	80°		
Fixture Power	14W	1	0.30	1.67	2276		
Source Flux	1748lm	2	0.59	3.34	569		
Fixture Flux	1383lm	3	0.89	5.01	253		
Efficacy	97lm/W	4	1.18	6.69	142		
TS1775	I _{max} =1302cd/klm	I _{max}	2276cd	5	1.48	8.36	91

JEDI PROJECTOR RGBW 'Q'


PHOTOMETRY

24" FLOOD / RED




		H(m)	D1(m)	D2(m)	Emax(lx)
		-			
		-	35°	88°	
Fixture Power	5W	1	0.63	1.94	204
Source Flux	314lm	2	1.26	3.88	51
Fixture Flux	236lm	3	1.90	5.81	23
Efficacy	45lm/W	4	2.53	7.75	13
TS1770	I _{max} =651cd/klm	I _{max}	204cd	5	3.16 9.69 8

24" FLOOD / GREEN

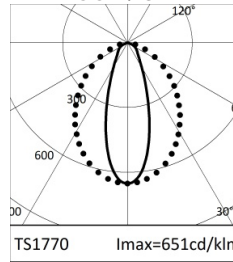


		H(m)	D1(m)	D2(m)	Emax(lx)
		-			
		-	35°	88°	
Fixture Power	7W	1	0.63	1.94	419
Source Flux	644lm	2	1.26	3.88	105
Fixture Flux	484lm	3	1.90	5.81	47
Efficacy	65lm/W	4	2.53	7.75	26
TS1770	I _{max} =651cd/klm	I _{max}	419cd	5	3.16 9.69 17

24" FLOOD / BLUE

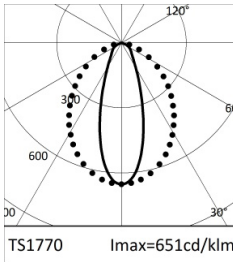


		H(m)	D1(m)	D2(m)	Emax(lx)
		-			
		-	35°	88°	
Fixture Power	7W	1	0.63	1.94	82
Source Flux	126lm	2	1.26	3.88	21
Fixture Flux	95lm	3	1.90	5.81	9
Efficacy	13lm/W	4	2.53	7.75	5
TS1770	I _{max} =651cd/klm	I _{max}	82cd	5	3.16 9.69 3

24" FLOOD / RGB

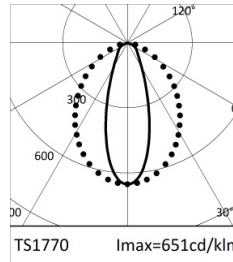


		H(m)	D1(m)	D2(m)	Emax(lx)
		-			
		-	35°	88°	
Fixture Power	20W	1	0.63	1.94	665
Source Flux	1022lm	2	1.26	3.88	166
Fixture Flux	768lm	3	1.90	5.81	74
Efficacy	39lm/W	4	2.53	7.75	42
TS1770	I _{max} =651cd/klm	I _{max}	665cd	5	3.16 9.69 27

24" FLOOD / RGBW

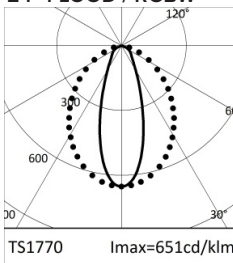


		H(m)	D1(m)	D2(m)	Emax(lx)
		-			
		-	35°	88°	
Fixture Power	28W	1	0.63	1.94	1168
Source Flux	1794lm	2	1.26	3.88	292
Fixture Flux	1349lm	3	1.90	5.81	130
Efficacy	49lm/W	4	2.53	7.75	73
TS1770	I _{max} =651cd/klm	I _{max}	1168cd	5	3.16 9.69 47

24" FLOOD / WHITE

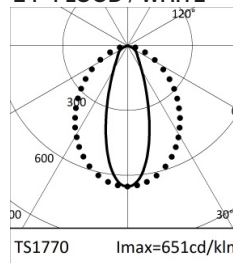

		H(m)	D1(m)	D2(m)	Emax(lx)
		-			
		-	35°	88°	
Fixture Power	7W	1	0.63	1.94	569
Source Flux	874lm	2	1.26	3.88	142
Fixture Flux	657lm	3	1.90	5.81	63
Efficacy	91lm/W	4	2.53	7.75	36
TS1770	I _{max} =651cd/klm	I _{max}	569cd	5	3.16 9.69 23

36" FLOOD / RED

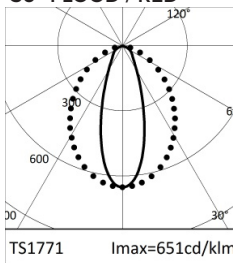


		H(m)	D1(m)	D2(m)	Emax(lx)
		-			
		-	35°	88°	
Fixture Power	8W	1	0.63	1.94	307
Source Flux	471lm	2	1.26	3.88	77
Fixture Flux	354lm	3	1.90	5.81	34
Efficacy	44lm/W	4	2.53	7.75	19
TS1771	I _{max} =651cd/klm	I _{max}	307cd	5	3.16 9.69 12

36" FLOOD / GREEN




		H(m)	D1(m)	D2(m)	Emax(lx)
		-			
		-	35°	88°	
Fixture Power	11W	1	0.63	1.94	629
Source Flux	966lm	2	1.26	3.88	157
Fixture Flux	726lm	3	1.90	5.81	70
Efficacy	65lm/W	4	2.53	7.75	39
TS1771	I _{max} =651cd/klm	I _{max}	629cd	5	3.16 9.69 25

36" FLOOD / BLUE

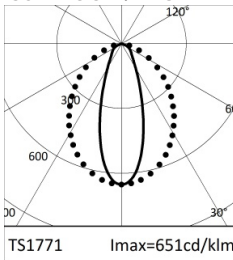


		H(m)	D1(m)	D2(m)	Emax(lx)
		-			
		-	35°	88°	
Fixture Power	11W	1	0.63	1.94	123
Source Flux	189lm	2	1.26	3.88	31
Fixture Flux	142lm	3	1.90	5.81	14
Efficacy	13lm/W	4	2.53	7.75	8
TS1771	I _{max} =651cd/klm	I _{max}	123cd	5	3.16 9.69 5

36" FLOOD / RGB

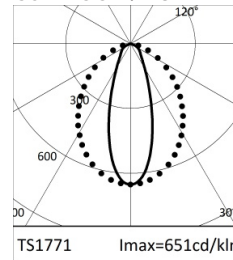


		H(m)	D1(m)	D2(m)	Emax(lx)
		-			
		-	35°	88°	
Fixture Power	30W	1	0.63	1.94	998
Source Flux	1533lm	2	1.26	3.88	249
Fixture Flux	1153lm	3	1.90	5.81	111
Efficacy	39lm/W	4	2.53	7.75	62
TS1771	I _{max} =651cd/klm	I _{max}	998cd	5	3.16 9.69 40

36" FLOOD / RGBW

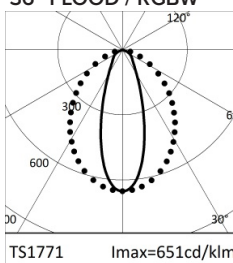

		H(m)	D1(m)	D2(m)	Emax(lx)
		-			
		-	35°	88°	
Fixture Power	41W	1	0.63	1.94	1752
Source Flux	2691lm	2	1.26	3.88	438
Fixture Flux	2023lm	3	1.90	5.81	195
Efficacy	49lm/W	4	2.53	7.75	109
TS1771	I _{max} =651cd/klm	I _{max}	1752cd	5	3.16 9.69 70

36" FLOOD / WHITE

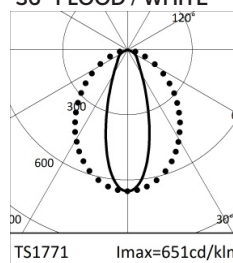


		H(m)	D1(m)	D2(m)	Emax(lx)
		-			
		-	35°	88°	
Fixture Power	11W	1	0.63	1.94	853
Source Flux	1311lm	2	1.26	3.88	213
Fixture Flux	986lm	3	1.90	5.81	95
Efficacy	92lm/W	4	2.53	7.75	53
TS1771	I _{max} =651cd/klm	I _{max}	853cd	5	3.16 9.69 34

JEDI PROJECTOR RGBW 'Q'

PHOTOMETRY

48" FLOOD / RED

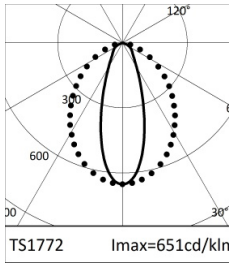

		H(m)	D1(m)	D2(m)	E _{max} (lx)
		-	35°	88°	
Fixture Power	11W	1	0.63	1.94	409
Source Flux	628lm	2	1.26	3.88	102
Fixture Flux	472lm	3	1.90	5.81	45
Efficacy	44lm/W	4	2.53	7.75	26
TS1772	I _{max} =651cd/klm	I _{max}	409cd	5	3.16 9.69 16

48" FLOOD / GREEN



		H(m)	D1(m)	D2(m)	E _{max} (lx)
		-	35°	88°	
Fixture Power	15W	1	0.63	1.94	838
Source Flux	1288lm	2	1.26	3.88	210
Fixture Flux	968lm	3	1.90	5.81	93
Efficacy	65lm/W	4	2.53	7.75	52
TS1772	I _{max} =651cd/klm	I _{max}	838cd	5	3.16 9.69 34

48" FLOOD / BLUE




		H(m)	D1(m)	D2(m)	E _{max} (lx)
		-	35°	88°	
Fixture Power	15W	1	0.63	1.94	164
Source Flux	252lm	2	1.26	3.88	41
Fixture Flux	189lm	3	1.90	5.81	18
Efficacy	13lm/W	4	2.53	7.75	10
TS1772	I _{max} =651cd/klm	I _{max}	164cd	5	3.16 9.69 7

48" FLOOD / RGB




		H(m)	D1(m)	D2(m)	E _{max} (lx)
		-	35°	88°	
Fixture Power	40W	1	0.63	1.94	1330
Source Flux	2044lm	2	1.26	3.88	333
Fixture Flux	1537lm	3	1.90	5.81	148
Efficacy	39lm/W	4	2.53	7.75	83
TS1772	I _{max} =651cd/klm	I _{max}	1330cd	5	3.16 9.69 53

48" FLOOD / RGBW

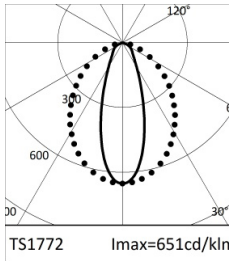

		H(m)	D1(m)	D2(m)	E _{max} (lx)
		-	35°	88°	
Fixture Power	55W	1	0.63	1.94	2335
Source Flux	3588lm	2	1.26	3.88	584
Fixture Flux	2698lm	3	1.90	5.81	259
Efficacy	49lm/W	4	2.53	7.75	146
TS1772	I _{max} =651cd/klm	I _{max}	2335cd	5	3.16 9.69 93

48" FLOOD / WHITE

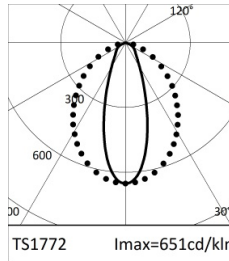

		H(m)	D1(m)	D2(m)	E _{max} (lx)
	3000K	-	35°	88°	
Fixture Power	14W	1	0.63	1.94	1138
Source Flux	1748lm	2	1.26	3.88	284
Fixture Flux	1314lm	3	1.90	5.81	126
Efficacy	92lm/W	4	2.53	7.75	71
TS1772	I _{max} =651cd/klm	I _{max}	1138cd	5	3.16 9.69 46