



JEDI RECESSED RGBW 'Q'

Dynamic Color Changing Recessed Linear LED Ingrade

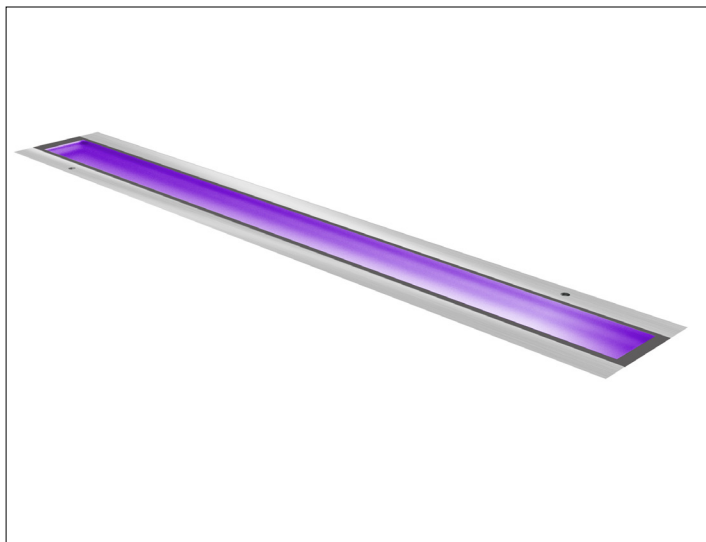

JEDI Q RECESSED RGBW

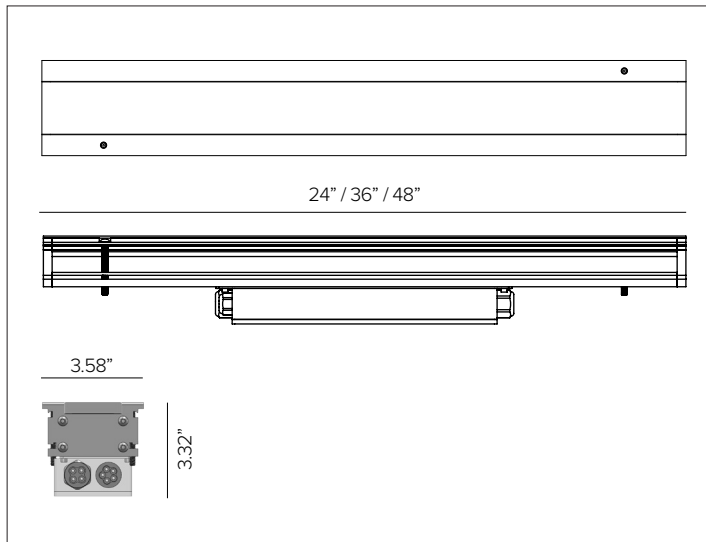

CONCEPT

Powerful addressable RGBW recessed linear LED ingrade.

MECHANICAL CHARACTERISTICS

Housing	3.47"D x 3.58"W
Materials	Extruded 15µ anodized aluminum body and black painted die-cast aluminum end caps with extra clear 10mm flat glass with stainless steel AISI 316 border trim. Driver housed in black metal box on underside of fixture. Consult factory for optional anti-slip etched glass.
Finish	<input type="radio"/> Brushed Natural <input type="radio"/> Bronze PVD* <input type="radio"/> Black PVD* *Physical Vapor Deposition, available upon request.
Power Connection	Pre-cabled with 1ea 18-3 line voltage and Belden 3105A data cables with IP68 quick disconnects. Lead and Solo configurations provided with 10ft lead cables.
Mounting	Installation sleeve required for inground flush mounting, see available options. Fixture incorporated with anti-theft stainless steel screws for securing to sleeve.
Weight	77lbs (24") / 91lbs (36") / 151lbs (48")
Protection	IP68 ^B / IP69K
Impact	IK10
Load Rating	H-20 fire truck tested resistant to static loads up to 28,229lbs.

CERTIFICATIONS

cULus listed Wet Location Listed E477426
 H-20 Load rating tested
 Tested in accordance with LM-79-08
 Compliant for California installations.
 RoHS3 EU 215/863

WARRANTY

5 year limited warranty
^A Fixture body complete with marine grade cataphoresis suitable for use in marine grade environments. Stainless Steel trim brushed finished surfaces may need to be cleaned occasionally to prevent collection of mineral deposits. Not to be in direct contact with salt or corrosive agents for extended periods of time.
^B Temporary immersion up to 24 hours at a max depth of 2 meters. Installation of fixture requires proper drainage to prevent any standing water. Should not be used for permanent submersion.

SUSTAINABILITY

Luminaire designed for disposal/recycling at end-of-life. Replaceable LED light source and control gear by a Targetti technician.

ELECTRICAL CHARACTERISTICS

Power Supply	Integral electronic driver, DMX 512 protocol. 0% dim range. Refer to Targetti Onsite Services for additional programing and installation support.
Wattage	28W (24"L) / 41W (36"L) / 55W (48"L) nominal / 4Ch
Voltage	Universal Voltage 120-277V AC 50/60Hz
Ambient Temp.	-25°C / +35°C (95°F)

SOURCE

High efficiency Quad Chip LED emitter.

TM30	CCT (Nominal)	SDCM
	RGBW 3000K	2

OPTIC

Optical system is comprised of a primary cylindrical glass lens and a high reflectance anodized aluminum reflector with an integrated holographic filter.

Beam				
		WW 20°x69°	WG 17°x80°	FL 35°x88°
Delivered Lumens	RGBW	2,769Lm	2,838Lm	2,698Lm
	<i>Data represents 48"L</i>			
	RGB	1,578Lm	1,617Lm	1,537Lm
	RED	485Lm	497Lm	472Lm
	GREEN	994Lm	1,019Lm	968Lm
	BLUE	195Lm	199Lm	189Lm
	3000K	1,349Lm	1,383Lm	1,314Lm

Refer to photometry section for all fixture variations.

Efficacy	97Lm/W max. Refer to photometric graphs for specific values.
Lifetime	L80/B10 60,000hrs at max TA +25°C
Photobiological Classification	Low risk safety RG1

JEDI RECESSED RGBW 'Q'

SPECIFICATION INFORMATION

JE	R							/	/	/	/	/
1	2	3	4	5	6	7	8	9	10	11	12	


Ex: JERDXWW24QCS / 1US2749

REQUIRED **OPTIONAL**


1 - PRODUCT CODE	2 - TYPE	3 - DRIVER	4 - OPTICS	5 - LENGTH	6 - KELVIN	7 - CABLE
JE — JEDI	R — Recessed	DX — DMX	WW — WW 20°x69° WG — WG 17°x80° FL — FL 35°x88°	24 — 24" 36 — 36" 48 — 48"	QC — RGBW Quad	L — Lead C — Center E — End S — Solo
8 - INSTALLATION	9 - INSTALLATION ACCESSORIES	10 - LEAD CONNECTION	11 - JUMPER CONNECTION CABLE	12 - CONTROLLER		
Stainless Steel Sleeve See section for details	Anti-vandal Torx Head See section for details	Additional Lead See section for details	Additional Jumper See section for details	DMX Programmable Controller See section for details		
Extruded Aluminum Sleeve See section for details	Suction Cup See section for details					

OPTIC VERSIONS


Wall Wash (WW)



Wall Grazer (WG)




Flood (FL)




JEDI RECESSED RGBW 'Q'

7 – CABLE

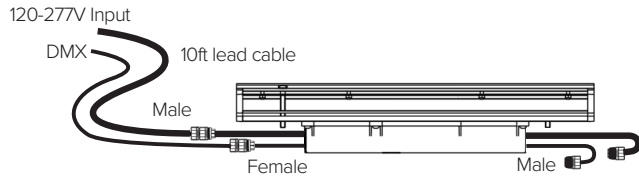


Lead - prewired input/output 10ft 18-3 line voltage and 18-2 data lead cables with IP68 quick disconnects included.

Part No. **L**




Center - prewired input/output for inline connections with 18-3 line voltage and 18-2 data lead cables with IP68 quick disconnects included.

Part No. **C**



End - prewired input for inline connections with 18-3 line voltage and 18-2 data lead cables with IP68 quick disconnects included.


Part No. **E**

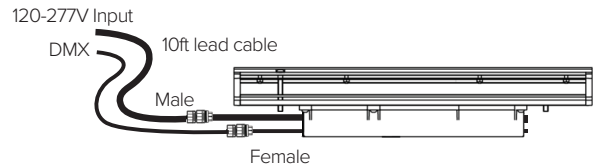

Solo - prewired input 10ft 18-3 line voltage and 18-2 data lead cables with IP68 quick disconnects included.

Part No. **S**

8 – INSTALLATION (REQUIRED)



JEDI installation sleeve kit for concrete pour applications. Stainless steel supplied with 2ea end caps with 1.5" knock out. **Can be used for solo or interconnected fixture configurations along with paver installations.**

Length	24"	36"	48"
Part No.	1US2749	1US2750	1US2751

9 – INSTALLATION ACCESSORIES (OPTIONAL)



Anti-vandal torx head. Suggested one per 5 fixture. **(RECOMMENDED)**

Part No. **1E3182**



Suction cup tool for fixture removal. **Helpful one per 20 fixtures.**

Part No. **1E0388**

JEDI RECESSED RGBW 'Q'

10 – ADDITIONAL LEAD CONNECTION CABLE (OPTIONAL)



JEDI RGBW additional lead cable kit. Includes 1ea 18-3 line voltage and Belden 3105A data cables with IP68 quick disconnects.

Length	10ft	25ft	50ft
Part No.	JEQDXLEAD-10	JEQDXLEAD-25	JEQDXLEAD-50





11 – ADDITIONAL JUMPER CONNECTION CABLE (OPTIONAL)



JEDI RGBW jumper cable kit. Includes 1ea 18-3 line voltage and Belden 3105A data cables with IP68 quick disconnects.

Length	5ft	10ft	25ft
Part No.	JEQDXJUMP-05	JEQDXJUMP-10	JEQDXJUMP-25

12 – CONTROL (OPTIONAL)

Part No.		Channels	Scenes	Zones	Rating	Voltage	Certification	Dimensions	Description
TGDMXSLESAU9		256	20	1	Indoor	5.5V DC	ETL, UL	5.3"W x 5.5"H x 1.9D	Nicolaudio Slesa smart DMX 1/2 universe programmable controller with easy to use software interface.
TGDMXSLESAU11		1024	99	5	Indoor	5VDC 120V AC <i>Plug in power supply included</i>	ETL	6.3" x 3.6" x 1.8"	Nicolaudio Slesa smart DMX interface, 2 DMX 512 universes, intuitive backlit keyboard programmable controller with easy to use software interface.
TGDMXSTICKDE3B		1024	500	10	Indoor	6-7V DC 120V AC <i>Plug in power supply included</i>	ETL	5.8" x 4.2" x 0.5"	Nicolaudio intelligent control keypad with glass touch sensitive graphic display, stand-alone DMX 512, 2 universe programmable controller with easy to use software interface. Black finish.
TGDMXSTICKDE3W		1024	500	10	Indoor	6-7V DC 120V AC <i>Plug in power supply included</i>	ETL	5.8" x 4.2" x 0.5"	Nicolaudio intelligent control keypad with glass touch sensitive graphic display, stand-alone DMX 512, 2 universe programmable controller with easy to use software interface. White finish.




USB-RDM Programmer code. DMX-RDM (Remote Device Management) address planner. Used with the "RDM Targetti" software that can be [downloaded for free from the Targetti USA website](#). To be used with all RGBW products. The USB-RDM programmer manages to direct DMX-RDM fixtures if there are no BUFFER or Splitter DMX on the section.

Part No.	1E2767
----------	---------------

JEDI RECESSED RGBW 'Q'


WIRING DIAGRAM

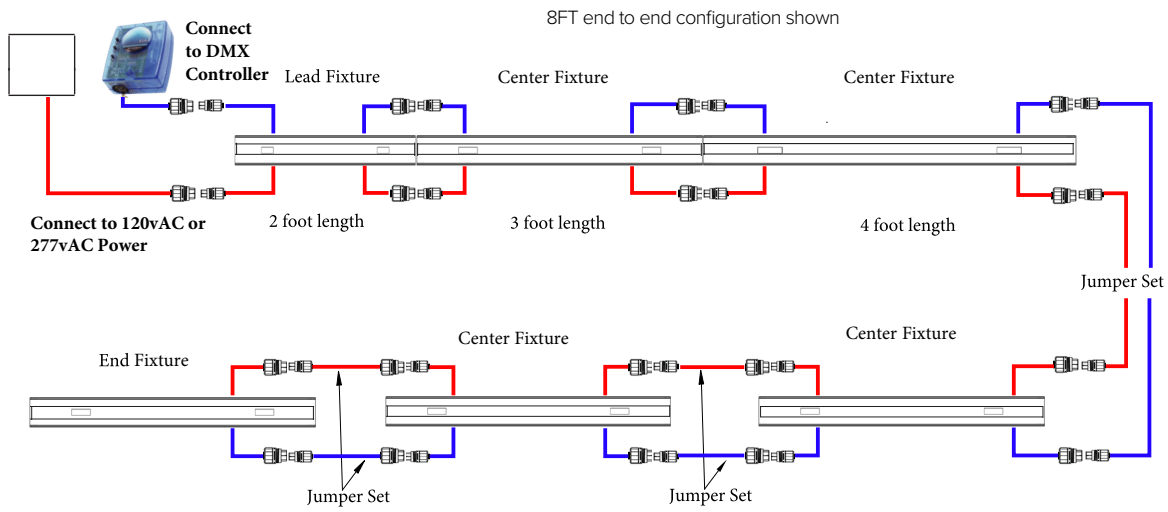


JEDI RECESSED RGBW 'Q'

INSTALLATION DIAGRAM


SOLO MOUNTING CONFIGURATION

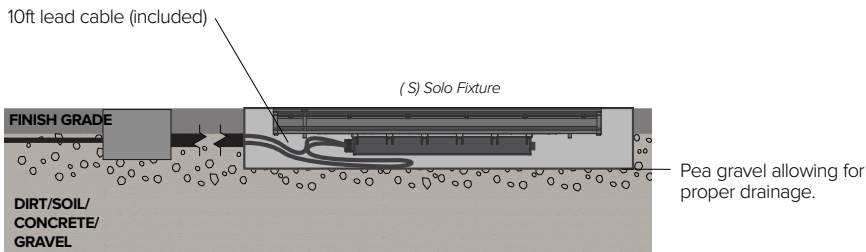

IN-LINE MOUNTING CONFIGURATION

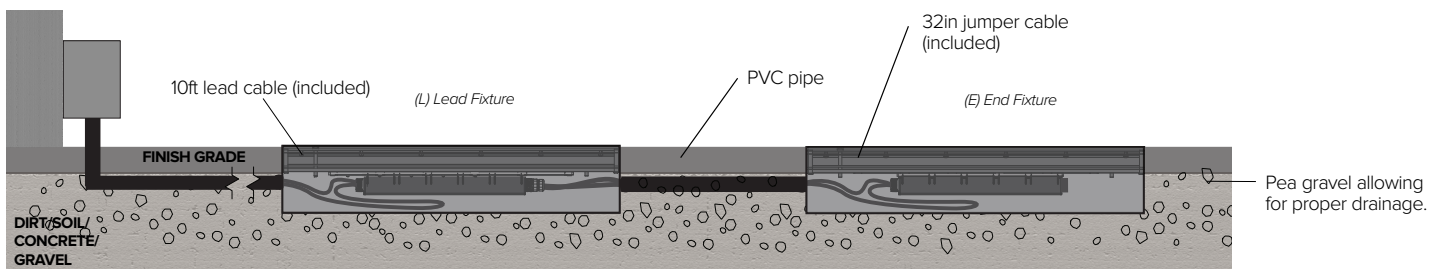

IN-LINE CONTINUOUS ROW MOUNTING CONFIGURATION

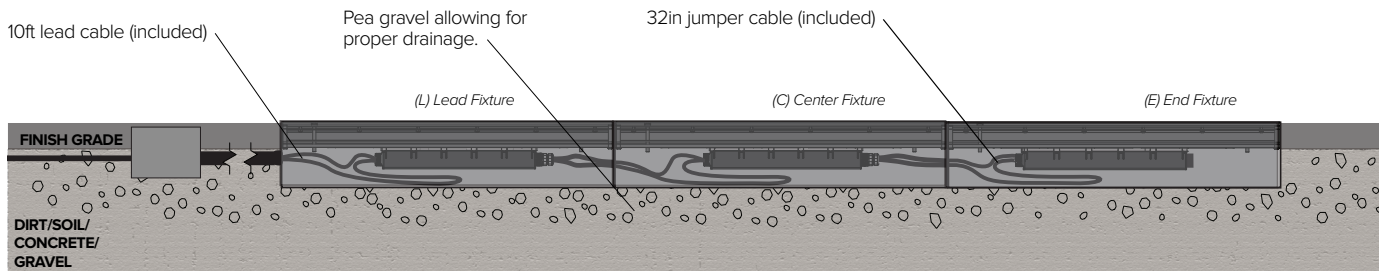

JEDI RECESSED RGBW 'Q'


PHOTOMETRY

24" WALL WASHER / RED



		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	-	-	-		
		-	20°	69°	-		
Fixture Power	5W	1	0.38	1.42	289		
Source Flux	314lm	2	0.75	2.84	72		
Fixture Flux	242lm	3	1.13	4.26	32		
Efficacy	46lm/W	4	1.51	5.68	18		
TS1776	Imax=1008cd/klm	Imax	316cd	5	1.89	7.11	12

24" WALL WASHER / GREEN

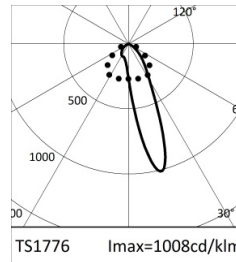

		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	-	-	-		
		-	20°	69°	-		
Fixture Power	7W	1	0.38	1.42	593		
Source Flux	644lm	2	0.75	2.84	148		
Fixture Flux	497lm	3	1.13	4.26	66		
Efficacy	67lm/W	4	1.51	5.68	37		
TS1776	Imax=1008cd/klm	Imax	649cd	5	1.89	7.11	24

24" WALL WASHER / BLUE



		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	-	-	-		
		-	20°	69°	-		
Fixture Power	7W	1	0.38	1.42	116		
Source Flux	126lm	2	0.75	2.84	29		
Fixture Flux	97lm	3	1.13	4.26	13		
Efficacy	13lm/W	4	1.51	5.68	7		
TS1776	Imax=1008cd/klm	Imax	127cd	5	1.89	7.11	5

24" WALL WASHER / RGB




		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	-	-	-		
		-	20°	69°	-		
Fixture Power	20W	1	0.38	1.42	942		
Source Flux	1022lm	2	0.75	2.84	235		
Fixture Flux	789lm	3	1.13	4.26	105		
Efficacy	40lm/W	4	1.51	5.68	59		
TS1776	Imax=1008cd/klm	Imax	1030cd	5	1.89	7.11	38

24" WALL WASHER / RGBW



		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	-	-	-		
		-	20°	69°	-		
Fixture Power	28W	1	0.38	1.42	1653		
Source Flux	1794lm	2	0.75	2.84	413		
Fixture Flux	1385lm	3	1.13	4.26	184		
Efficacy	50lm/W	4	1.51	5.68	103		
TS1776	Imax=1008cd/klm	Imax	1808cd	5	1.89	7.11	66

24" WALL WASHER / WHITE

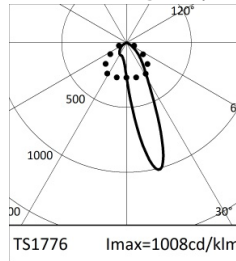


		3000K	H(m)	D1(m)	D2(m)	Emax(lx)	
		-	-	-	-	-	
		-	20°	69°	-	-	
Fixture Power	7W	1	0.38	1.42	805		
Source Flux	874lm	2	0.75	2.84	201		
Fixture Flux	675lm	3	1.13	4.26	89		
Efficacy	94lm/W	4	1.51	5.68	50		
TS1776	Imax=1008cd/klm	Imax	881cd	5	1.89	7.11	32

36" WALL WASHER / RED



		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	-	-	-		
		-	20°	69°	-		
Fixture Power	8W	1	0.38	1.42	434		
Source Flux	471lm	2	0.75	2.84	108		
Fixture Flux	364lm	3	1.13	4.26	48		
Efficacy	45lm/W	4	1.51	5.68	27		
TS1777	Imax=1008cd/klm	Imax	475cd	5	1.89	7.11	17

36" WALL WASHER / GREEN

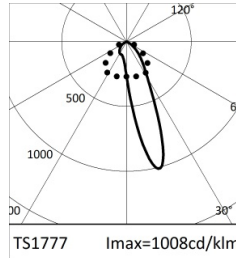

		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	-	-	-		
		-	20°	69°	-		
Fixture Power	11W	1	0.38	1.42	890		
Source Flux	966lm	2	0.75	2.84	223		
Fixture Flux	746lm	3	1.13	4.26	99		
Efficacy	67lm/W	4	1.51	5.68	56		
TS1777	Imax=1008cd/klm	Imax	973cd	5	1.89	7.11	36

36" WALL WASHER / BLUE




		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	-	-	-		
		-	20°	69°	-		
Fixture Power	11W	1	0.38	1.42	174		
Source Flux	189lm	2	0.75	2.84	44		
Fixture Flux	146lm	3	1.13	4.26	19		
Efficacy	13lm/W	4	1.51	5.68	11		
TS1777	Imax=1008cd/klm	Imax	190cd	5	1.89	7.11	7

36" WALL WASHER / RGB




		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	-	-	-		
		-	20°	69°	-		
Fixture Power	30W	1	0.38	1.42	1412		
Source Flux	1533lm	2	0.75	2.84	353		
Fixture Flux	1183lm	3	1.13	4.26	157		
Efficacy	40lm/W	4	1.51	5.68	88		
TS1777	Imax=1008cd/klm	Imax	1545cd	5	1.89	7.11	56

36" WALL WASHER / RGBW

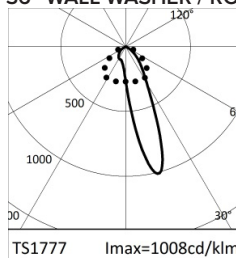

		H(m)	D1(m)	D2(m)	Emax(lx)		
		-	-	-	-		
		-	20°	69°	-		
Fixture Power	41W	1	0.38	1.42	2479		
Source Flux	2691lm	2	0.75	2.84	620		
Fixture Flux	2077lm	3	1.13	4.26	275		
Efficacy	50lm/W	4	1.51	5.68	155		
TS1777	Imax=1008cd/klm	Imax	2712cd	5	1.89	7.11	99

36" WALL WASHER / WHITE

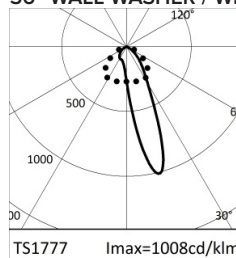


		3000K	H(m)	D1(m)	D2(m)	Emax(lx)	
		-	-	-	-	-	
		-	20°	69°	-	-	
Fixture Power	11W	1	0.38	1.42	1208		
Source Flux	1311lm	2	0.75	2.84	302		
Fixture Flux	1012lm	3	1.13	4.26	134		
Efficacy	95lm/W	4	1.51	5.68	75		
TS1777	Imax=1008cd/klm	Imax	1321cd	5	1.89	7.11	48

JEDI RECESSED RGBW 'Q'

PHOTOMETRY

48" WALL WASHER / RED

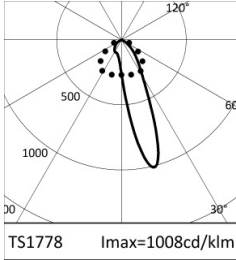


		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		20°	69°			
Fixture Power	11W	1	0.38	1.42	579		
Source Flux	628lm	2	0.75	2.84	145		
Fixture Flux	485lm	3	1.13	4.26	64		
Efficacy	45lm/W	4	1.51	5.68	36		
TS1778	I _{max} =1008cd/klm	I _{max}	633cd	5	1.89	7.11	23

48" WALL WASHER / GREEN



		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		20°	69°			
Fixture Power	15W	1	0.38	1.42	1187		
Source Flux	1288lm	2	0.75	2.84	297		
Fixture Flux	994lm	3	1.13	4.26	132		
Efficacy	67lm/W	4	1.51	5.68	74		
TS1778	I _{max} =1008cd/klm	I _{max}	1298cd	5	1.89	7.11	47

48" WALL WASHER / BLUE

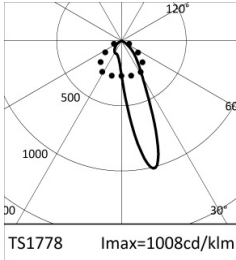


		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		20°	69°			
Fixture Power	15W	1	0.38	1.42	232		
Source Flux	252lm	2	0.75	2.84	58		
Fixture Flux	195lm	3	1.13	4.26	26		
Efficacy	13lm/W	4	1.51	5.68	15		
TS1778	I _{max} =1008cd/klm	I _{max}	254cd	5	1.89	7.11	9

48" WALL WASHER / RGB




		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		20°	69°			
Fixture Power	40W	1	0.38	1.42	1883		
Source Flux	2044lm	2	0.75	2.84	471		
Fixture Flux	1578lm	3	1.13	4.26	209		
Efficacy	40lm/W	4	1.51	5.68	118		
TS1778	I _{max} =1008cd/klm	I _{max}	2060cd	5	1.89	7.11	75

48" WALL WASHER / RGBW

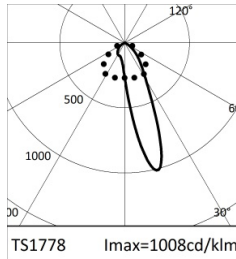


		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		20°	69°			
Fixture Power	55W	1	0.38	1.42	3306		
Source Flux	3588lm	2	0.75	2.84	826		
Fixture Flux	2769lm	3	1.13	4.26	367		
Efficacy	50lm/W	4	1.51	5.68	207		
TS1778	I _{max} =1008cd/klm	I _{max}	3615cd	5	1.89	7.11	132

48" WALL WASHER / WHITE

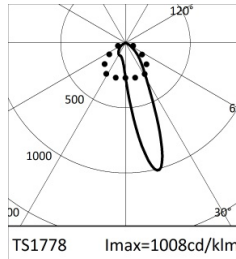


		3000K	H(m)	D1(m)	D2(m)	E _{max} (lx)	
	-			20°	69°		
Fixture Power	14W	1	0.38	1.42	1611		
Source Flux	1748lm	2	0.75	2.84	403		
Fixture Flux	1349lm	3	1.13	4.26	179		
Efficacy	94lm/W	4	1.51	5.68	101		
TS1778	I _{max} =1008cd/klm	I _{max}	1761cd	5	1.89	7.11	64

24" WALL GRAZER / RED

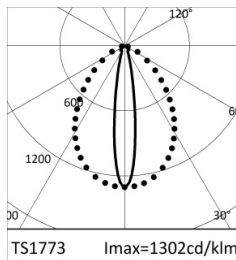

		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		17°	80°			
Fixture Power	5W	1	0.30	1.67	409		
Source Flux	314lm	2	0.59	3.34	102		
Fixture Flux	248lm	3	0.89	5.01	45		
Efficacy	47lm/W	4	1.18	6.69	26		
TS1773	I _{max} =1302cd/klm	I _{max}	409cd	5	1.48	8.36	16

24" WALL GRAZER / GREEN

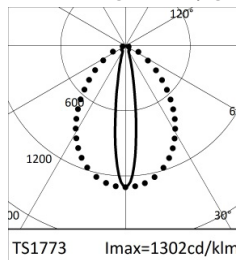


		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		17°	80°			
Fixture Power	7W	1	0.30	1.67	838		
Source Flux	644lm	2	0.59	3.34	210		
Fixture Flux	509lm	3	0.89	5.01	93		
Efficacy	69lm/W	4	1.18	6.69	52		
TS1773	I _{max} =1302cd/klm	I _{max}	838cd	5	1.48	8.36	34

24" WALL GRAZER / BLUE




		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		17°	80°			
Fixture Power	7W	1	0.30	1.67	164		
Source Flux	126lm	2	0.59	3.34	41		
Fixture Flux	100lm	3	0.89	5.01	18		
Efficacy	14lm/W	4	1.18	6.69	10		
TS1773	I _{max} =1302cd/klm	I _{max}	164cd	5	1.48	8.36	7

24" WALL GRAZER / RGB

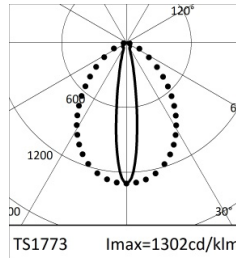


		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		17°	80°			
Fixture Power	20W	1	0.30	1.67	1331		
Source Flux	1022lm	2	0.59	3.34	333		
Fixture Flux	808lm	3	0.89	5.01	148		
Efficacy	41lm/W	4	1.18	6.69	83		
TS1773	I _{max} =1302cd/klm	I _{max}	1331cd	5	1.48	8.36	53

24" WALL GRAZER / RGBW

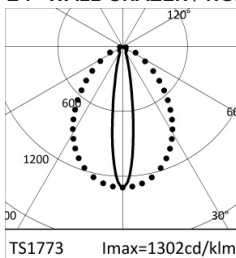

		H(m)	D1(m)	D2(m)	E _{max} (lx)		
	-		17°	80°			
Fixture Power	28W	1	0.30	1.67	2336		
Source Flux	1794lm	2	0.59	3.34	584		
Fixture Flux	1419lm	3	0.89	5.01	260		
Efficacy	52lm/W	4	1.18	6.69	146		
TS1773	I _{max} =1302cd/klm	I _{max}	2336cd	5	1.48	8.36	93

24" WALL GRAZER / WHITE

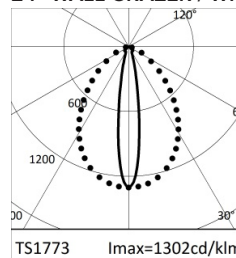


		3000K	H(m)	D1(m)	D2(m)	E _{max} (lx)	
	-			17°	80°		
Fixture Power	7W	1	0.30	1.67	1138		
Source Flux	874lm	2	0.59	3.34	284		
Fixture Flux	691lm	3	0.89	5.01	126		
Efficacy	96lm/W	4	1.18	6.69	71		
TS1773	I _{max} =1302cd/klm	I _{max}	1138cd	5	1.48	8.36	46

JEDI RECESSED RGBW 'Q'

PHOTOMETRY

36" WALL GRAZER / RED

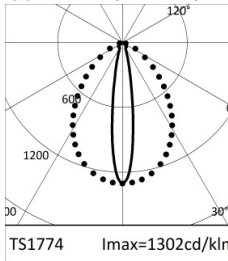

		H(m)	D1(m)	D2(m)	Emax(lx)		
		17°	80°				
Fixture Power	8W	1	0.30	1.67	613		
Source Flux	471lm	2	0.59	3.34	153		
Fixture Flux	373lm	3	0.89	5.01	68		
Efficacy	47lm/W	4	1.18	6.69	38		
TS1774	Imax=1302cd/klm	Imax	613cd	5	1.48	8.36	25

36" WALL GRAZER / GREEN



		H(m)	D1(m)	D2(m)	Emax(lx)		
		17°	80°				
Fixture Power	11W	1	0.30	1.67	1258		
Source Flux	966lm	2	0.59	3.34	314		
Fixture Flux	764lm	3	0.89	5.01	140		
Efficacy	69lm/W	4	1.18	6.69	79		
TS1774	Imax=1302cd/klm	Imax	1258cd	5	1.48	8.36	50

36" WALL GRAZER / BLUE




		H(m)	D1(m)	D2(m)	Emax(lx)		
		17°	80°				
Fixture Power	11W	1	0.30	1.67	246		
Source Flux	189lm	2	0.59	3.34	62		
Fixture Flux	150lm	3	0.89	5.01	27		
Efficacy	14lm/W	4	1.18	6.69	15		
TS1774	Imax=1302cd/klm	Imax	246cd	5	1.48	8.36	10

36" WALL GRAZER / RGB




		H(m)	D1(m)	D2(m)	Emax(lx)		
		17°	80°				
Fixture Power	30W	1	0.30	1.67	1996		
Source Flux	1533lm	2	0.59	3.34	499		
Fixture Flux	1213lm	3	0.89	5.01	222		
Efficacy	41lm/W	4	1.18	6.69	125		
TS1774	Imax=1302cd/klm	Imax	1996cd	5	1.48	8.36	80

36" WALL GRAZER / RGBW

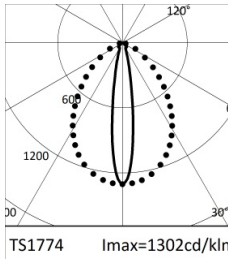


		H(m)	D1(m)	D2(m)	Emax(lx)		
		17°	80°				
Fixture Power	41W	1	0.30	1.67	3504		
Source Flux	2691lm	2	0.59	3.34	876		
Fixture Flux	2129lm	3	0.89	5.01	389		
Efficacy	52lm/W	4	1.18	6.69	219		
TS1774	Imax=1302cd/klm	Imax	3504cd	5	1.48	8.36	140

36" WALL GRAZER / WHITE

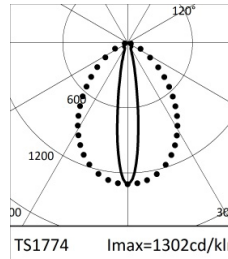

	3000K	H(m)	D1(m)	D2(m)	Emax(lx)		
		17°	80°				
Fixture Power	11W	1	0.30	1.67	1707		
Source Flux	1311lm	2	0.59	3.34	427		
Fixture Flux	1037lm	3	0.89	5.01	190		
Efficacy	97lm/W	4	1.18	6.69	107		
TS1774	Imax=1302cd/klm	Imax	1707cd	5	1.48	8.36	68

48" WALL GRAZER / RED

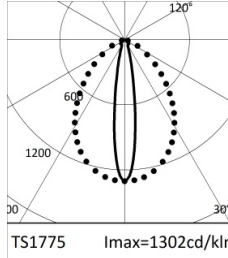


		H(m)	D1(m)	D2(m)	Emax(lx)		
		17°	80°				
Fixture Power	11W	1	0.30	1.67	818		
Source Flux	628lm	2	0.59	3.34	204		
Fixture Flux	497lm	3	0.89	5.01	91		
Efficacy	46lm/W	4	1.18	6.69	51		
TS1775	Imax=1302cd/klm	Imax	818cd	5	1.48	8.36	33

48" WALL GRAZER / GREEN




		H(m)	D1(m)	D2(m)	Emax(lx)		
		17°	80°				
Fixture Power	15W	1	0.30	1.67	1677		
Source Flux	1288lm	2	0.59	3.34	419		
Fixture Flux	1019lm	3	0.89	5.01	186		
Efficacy	69lm/W	4	1.18	6.69	105		
TS1775	Imax=1302cd/klm	Imax	1677cd	5	1.48	8.36	67

48" WALL GRAZER / BLUE

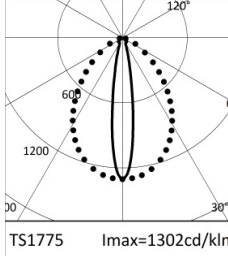


		H(m)	D1(m)	D2(m)	Emax(lx)		
		17°	80°				
Fixture Power	15W	1	0.30	1.67	328		
Source Flux	252lm	2	0.59	3.34	82		
Fixture Flux	199lm	3	0.89	5.01	36		
Efficacy	14lm/W	4	1.18	6.69	21		
TS1775	Imax=1302cd/klm	Imax	328cd	5	1.48	8.36	13

48" WALL GRAZER / RGB

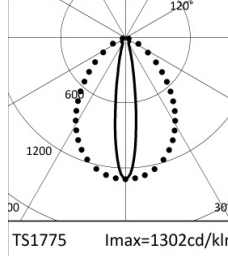

		H(m)	D1(m)	D2(m)	Emax(lx)		
		17°	80°				
Fixture Power	40W	1	0.30	1.67	2661		
Source Flux	2044lm	2	0.59	3.34	665		
Fixture Flux	1617lm	3	0.89	5.01	296		
Efficacy	41lm/W	4	1.18	6.69	166		
TS1775	Imax=1302cd/klm	Imax	2661cd	5	1.48	8.36	106

48" WALL GRAZER / RGBW

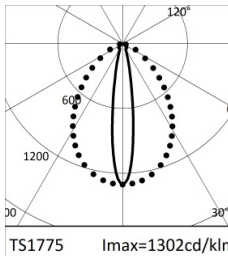

		H(m)	D1(m)	D2(m)	Emax(lx)		
		17°	80°				
Fixture Power	55W	1	0.30	1.67	4671		
Source Flux	3588lm	2	0.59	3.34	1168		
Fixture Flux	2838lm	3	0.89	5.01	519		
Efficacy	52lm/W	4	1.18	6.69	292		
TS1775	Imax=1302cd/klm	Imax	4671cd	5	1.48	8.36	187

48" WALL GRAZER / WHITE




	3000K	H(m)	D1(m)	D2(m)	Emax(lx)		
		17°	80°				
Fixture Power	14W	1	0.30	1.67	2276		
Source Flux	1748lm	2	0.59	3.34	569		
Fixture Flux	1383lm	3	0.89	5.01	253		
Efficacy	97lm/W	4	1.18	6.69	142		
TS1775	Imax=1302cd/klm	Imax	2276cd	5	1.48	8.36	91

JEDI RECESSED RGBW 'Q'


PHOTOMETRY

24" FLOOD / RED

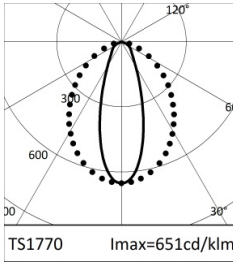


		H(m)	D1(m)	D2(m)	Emax(lx)
		-	35°	88°	
Fixture Power	5W	1	0.63	1.94	204
Source Flux	314lm	2	1.26	3.88	51
Fixture Flux	236lm	3	1.90	5.81	23
Efficacy	45lm/W	4	2.53	7.75	13
TS1770	I _{max} =651cd/klm	I _{max}	204cd	5	3.16 9.69 8

24" FLOOD / GREEN

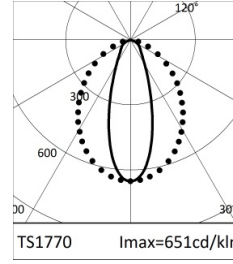

		H(m)	D1(m)	D2(m)	Emax(lx)
		-	35°	88°	
Fixture Power	7W	1	0.63	1.94	419
Source Flux	644lm	2	1.26	3.88	105
Fixture Flux	484lm	3	1.90	5.81	47
Efficacy	65lm/W	4	2.53	7.75	26
TS1770	I _{max} =651cd/klm	I _{max}	419cd	5	3.16 9.69 17

24" FLOOD / BLUE

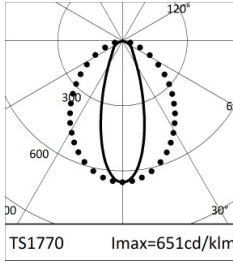

		H(m)	D1(m)	D2(m)	Emax(lx)
		-	35°	88°	
Fixture Power	7W	1	0.63	1.94	82
Source Flux	126lm	2	1.26	3.88	21
Fixture Flux	95lm	3	1.90	5.81	9
Efficacy	13lm/W	4	2.53	7.75	5
TS1770	I _{max} =651cd/klm	I _{max}	82cd	5	3.16 9.69 3

24" FLOOD / RGB



		H(m)	D1(m)	D2(m)	Emax(lx)
		-	35°	88°	
Fixture Power	20W	1	0.63	1.94	665
Source Flux	1022lm	2	1.26	3.88	166
Fixture Flux	768lm	3	1.90	5.81	74
Efficacy	39lm/W	4	2.53	7.75	42
TS1770	I _{max} =651cd/klm	I _{max}	665cd	5	3.16 9.69 27

24" FLOOD / RGBW




		H(m)	D1(m)	D2(m)	Emax(lx)
		-	35°	88°	
Fixture Power	28W	1	0.63	1.94	1168
Source Flux	1794lm	2	1.26	3.88	292
Fixture Flux	1349lm	3	1.90	5.81	130
Efficacy	49lm/W	4	2.53	7.75	73
TS1770	I _{max} =651cd/klm	I _{max}	1168cd	5	3.16 9.69 47

24" FLOOD / WHITE




		3000K	H(m)	D1(m)	D2(m)	Emax(lx)
		-	-	35°	88°	
Fixture Power	7W	1	0.63	1.94	569	
Source Flux	874lm	2	1.26	3.88	142	
Fixture Flux	657lm	3	1.90	5.81	63	
Efficacy	91lm/W	4	2.53	7.75	36	
TS1770	I _{max} =651cd/klm	I _{max}	569cd	5	3.16 9.69 23	

36" FLOOD / RED

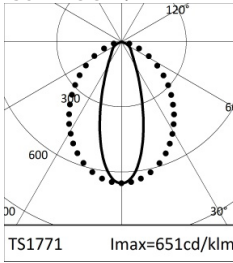

		H(m)	D1(m)	D2(m)	Emax(lx)
		-	35°	88°	
Fixture Power	8W	1	0.63	1.94	307
Source Flux	471lm	2	1.26	3.88	77
Fixture Flux	354lm	3	1.90	5.81	34
Efficacy	44lm/W	4	2.53	7.75	19
TS1771	I _{max} =651cd/klm	I _{max}	307cd	5	3.16 9.69 12

36" FLOOD / GREEN

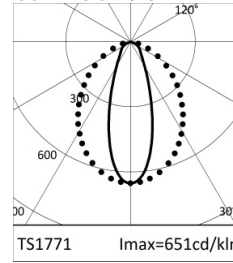

		H(m)	D1(m)	D2(m)	Emax(lx)
		-	35°	88°	
Fixture Power	11W	1	0.63	1.94	629
Source Flux	966lm	2	1.26	3.88	157
Fixture Flux	726lm	3	1.90	5.81	70
Efficacy	65lm/W	4	2.53	7.75	39
TS1771	I _{max} =651cd/klm	I _{max}	629cd	5	3.16 9.69 25

36" FLOOD / BLUE




		H(m)	D1(m)	D2(m)	Emax(lx)
		-	35°	88°	
Fixture Power	11W	1	0.63	1.94	123
Source Flux	189lm	2	1.26	3.88	31
Fixture Flux	142lm	3	1.90	5.81	14
Efficacy	13lm/W	4	2.53	7.75	8
TS1771	I _{max} =651cd/klm	I _{max}	123cd	5	3.16 9.69 5

36" FLOOD / RGB




		H(m)	D1(m)	D2(m)	Emax(lx)
		-	35°	88°	
Fixture Power	30W	1	0.63	1.94	998
Source Flux	1533lm	2	1.26	3.88	249
Fixture Flux	1153lm	3	1.90	5.81	111
Efficacy	39lm/W	4	2.53	7.75	62
TS1771	I _{max} =651cd/klm	I _{max}	998cd	5	3.16 9.69 40

36" FLOOD / RGBW

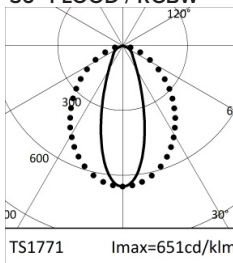

		H(m)	D1(m)	D2(m)	Emax(lx)
		-	35°	88°	
Fixture Power	41W	1	0.63	1.94	1752
Source Flux	2691lm	2	1.26	3.88	438
Fixture Flux	2023lm	3	1.90	5.81	195
Efficacy	49lm/W	4	2.53	7.75	109
TS1771	I _{max} =651cd/klm	I _{max}	1752cd	5	3.16 9.69 70

36" FLOOD / WHITE

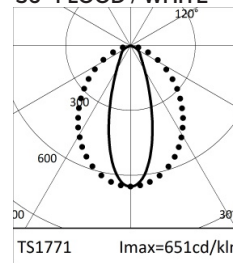


		3000K	H(m)	D1(m)	D2(m)	Emax(lx)
		-	-	35°	88°	
Fixture Power	11W	1	0.63	1.94	853	
Source Flux	1311lm	2	1.26	3.88	213	
Fixture Flux	986lm	3	1.90	5.81	95	
Efficacy	92lm/W	4	2.53	7.75	53	
TS1771	I _{max} =651cd/klm	I _{max}	853cd	5	3.16 9.69 34	

JEDI RECESSED RGBW 'Q'


PHOTOMETRY

48" FLOOD / RED

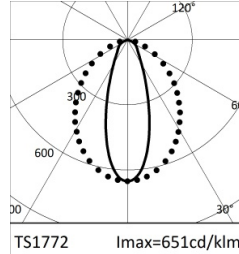

		H(m)	D1(m)	D2(m)	Emax(lx)
		-	35°	88°	
Fixture Power	11W	1	0.63	1.94	409
Source Flux	628lm	2	1.26	3.88	102
Fixture Flux	472lm	3	1.90	5.81	45
Efficacy	44lm/W	4	2.53	7.75	26
TS1772	I _{max} =651cd/klm	I _{max}	409cd	5	3.16 9.69 16

48" FLOOD / GREEN

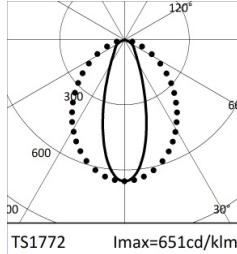


		H(m)	D1(m)	D2(m)	Emax(lx)
		-	35°	88°	
Fixture Power	15W	1	0.63	1.94	838
Source Flux	1288lm	2	1.26	3.88	210
Fixture Flux	968lm	3	1.90	5.81	93
Efficacy	65lm/W	4	2.53	7.75	52
TS1772	I _{max} =651cd/klm	I _{max}	838cd	5	3.16 9.69 34

48" FLOOD / BLUE




		H(m)	D1(m)	D2(m)	Emax(lx)
		-	35°	88°	
Fixture Power	15W	1	0.63	1.94	164
Source Flux	252lm	2	1.26	3.88	41
Fixture Flux	189lm	3	1.90	5.81	18
Efficacy	13lm/W	4	2.53	7.75	10
TS1772	I _{max} =651cd/klm	I _{max}	164cd	5	3.16 9.69 7

48" FLOOD / RGB

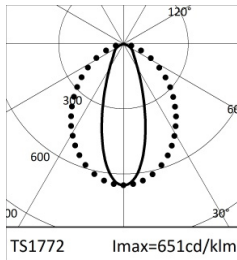


		H(m)	D1(m)	D2(m)	Emax(lx)
		-	35°	88°	
Fixture Power	40W	1	0.63	1.94	1330
Source Flux	2044lm	2	1.26	3.88	333
Fixture Flux	1537lm	3	1.90	5.81	148
Efficacy	39lm/W	4	2.53	7.75	83
TS1772	I _{max} =651cd/klm	I _{max}	1330cd	5	3.16 9.69 53

48" FLOOD / RGBW

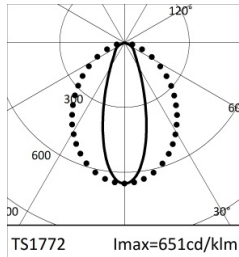

		H(m)	D1(m)	D2(m)	Emax(lx)
		-	35°	88°	
Fixture Power	55W	1	0.63	1.94	2335
Source Flux	3588lm	2	1.26	3.88	584
Fixture Flux	2698lm	3	1.90	5.81	259
Efficacy	49lm/W	4	2.53	7.75	146
TS1772	I _{max} =651cd/klm	I _{max}	2335cd	5	3.16 9.69 93

48" FLOOD / WHITE

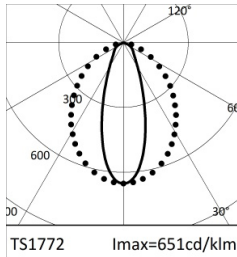

		3000K	H(m)	D1(m)	D2(m)	Emax(lx)
		-	35°	88°		
Fixture Power	14W	1	0.63	1.94	1138	
Source Flux	1748lm	2	1.26	3.88	284	
Fixture Flux	1314lm	3	1.90	5.81	126	
Efficacy	92lm/W	4	2.53	7.75	71	
TS1772	I _{max} =651cd/klm	I _{max}	1138cd	5	3.16 9.69 46	