


LABEL 4 CANOPY

Cylinder Monopoint Projector



FORTYEIGHT LABEL 4 shown in Deep Black finish.

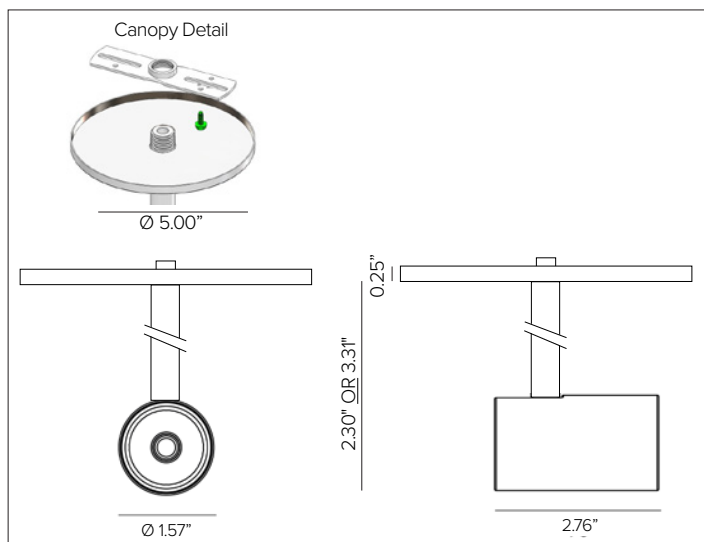

CONCEPT

Professional adjustable LED monopoint projector.

MECHANICAL CHARACTERISTICS

Dimensions	1.57" Diameter
Materials	Die-cast aluminum finished body.
Finish	☐ Plaster White ☒ Deep Black
Functionality	Fixture can be vertically adjusted from 0° to 90° and horizontally up to 355°.
Mounting	Universal 5" canopy to be mounted over 4"x 4" octagonal junction box. Completed with ridged stem.
Weight	0.29lbs
Protection	IP20

CERTIFICATIONS

cULus Class 2
 Tested in accordance with LM-79-08.
 Compliant for California installations
 RoHS3 EU 215/863

WARRANTY

5 year limited warranty.

SUSTAINABILITY

Luminaire designed for disposal/recycling at end-of-life. Replaceable LED light source and control gear by a Targetti technician.

ELECTRICAL CHARACTERISTICS

Power Supply	Remote power supply required.
Wattage	9W
Control	0-10V

SOURCE

High efficiency LED emitter.

TM30	CCT (Nominal)	CRI	Rf	Rg	SDCM
	2700K	90	92	99	1.5
	3000K	90	92	101	1.5
	3500K	90	91	100	1.5
	4000K	90	90	98	1.5

OPTIC

Optical system is dependent on beam angle. SP / FL versions comprised of metalized polycarbonate precision optics with opaque black silicone cut off ring. MWFL version comprised of convex faceted highly reflective anodized aluminum precision optic with opaque black silicone cut off ring.

Beam	SP 18°	FL 27°	MWFL 42°
Delivered Lumens			
2700K	577Lm	774Lm	802Lm
3000K	621Lm	806Lm	835Lm
4000K	660Lm	819Lm	848Lm
<i>For 3500K lumen values use multiplier of 1.02 from 3000K</i>			
Efficacy	96 Lm/W max. Refer to photometric graphs for specific values.		
Lifetime	L92/B10 >30,000hrs at max TA +25°C L90/B10 >50,000hrs at max TA +25°C		
Photobiological Classification	Low risk photobiological safety RG1		

LABEL 4 CANOPY

SPECIFICATION INFORMATION

48	LA	4C							/	/		
1	2	3	4	5	6	7	8	9			10	11
											OPTIONAL	REQUIRED

1 - PRODUCT CODE	2 - TYPE	3 - SIZE	4 - DRIVER	5 - STEM	6 - WATTAGE	7 - OPTICS	8 - KELVIN	9 - FINISH
48 — FORTYEIGHT	LA — LABEL	4C — 1.57" Dia.	RP — Remote Power	S — Short 2.30"H L — Long 3.32"H	L1 — 9W	SP — SP 18° FL — FL 27° MW — MWFL 42°	27 — 2700K 30 — 3000K 35 — 3500K 40 — 4000K	PW — Plaster White DB — Deep Black

10 - OPTICAL ACCESSORIES	11 - POWER SUPPLY
Anti-Glare Louver See section for details Blade of Light Linear Spread Lens See section for details	Power Supply See section for details


LABEL 4 CANOPY

10 – ACCESSORIES (OPTIONAL)



'Blade of Light' linear spread lens. PMMA holographic filter.

Part No. **1T6931**



Anti-glare louver. Lacquered metal honeycomb structure. Complete with holographic diffusion filter.

Finish ☒ Deep Black

Part No. **1T6930**

11 - POWER SUPPLY (REQUIRED)


STANDALONE

Part No.	Wattage	Control	Dim Range	Rating	In / Out Voltage	Certification	Dimensions	Description
PS140	20W (ONE to ONE driver)	0-10V	0%	NEMA3R	120-277V / 250mA	UL Class 2	2.76" x 1.57" x 1.16"	ERP PTB programmable driver.


LABEL 4 CANOPY

PHOTOMETRY


SPOT



	2700K	H(m)	D(m)	E _{max} (lx)		
	Ra90		18°			
Fixture Power	9W	1	0.31	3913		
Source Flux	912lm	2	0.62	978		
Fixture Flux	577lm	3	0.93	435		
Efficacy	66lm/W	4	1.24	245		
TS1072	I _{max} =4291cd/klm	I _{max}	3913cd	5	1.55	157




	4000K	H(m)	D(m)	E _{max} (lx)		
	Ra90		18°			
Fixture Power	9W	1	0.31	4471		
Source Flux	1042lm	2	0.62	1118		
Fixture Flux	660lm	3	0.93	497		
Efficacy	75lm/W	4	1.24	279		
TS1072	I _{max} =4291cd/klm	I _{max}	4471cd	5	1.55	179




	3000K	H(m)	D(m)	E _{max} (lx)		
	Ra90		18°			
Fixture Power	9W	1	0.31	4214		
Source Flux	982lm	2	0.62	1053		
Fixture Flux	622lm	3	0.93	468		
Efficacy	71lm/W	4	1.24	263		
TS1072	I _{max} =4291cd/klm	I _{max}	4214cd	5	1.55	169


FLOOD



	2700K	H(m)	D(m)	E _{max} (lx)		
	Ra90		27°			
Fixture Power	9W	1	0.48	3074		
Source Flux	1085lm	2	0.95	769		
Fixture Flux	774lm	3	1.43	342		
Efficacy	88lm/W	4	1.91	192		
TS1073	I _{max} =2834cd/klm	I _{max}	3074cd	5	2.38	123




	4000K	H(m)	D(m)	E _{max} (lx)		
	Ra90		27°			
Fixture Power	9W	1	0.48	3250		
Source Flux	1147lm	2	0.95	813		
Fixture Flux	819lm	3	1.43	361		
Efficacy	93lm/W	4	1.91	203		
TS1073	I _{max} =2834cd/klm	I _{max}	3250cd	5	2.38	130



	3000K	H(m)	D(m)	E _{max} (lx)		
	Ra90		27°			
Fixture Power	9W	1	0.48	3199		
Source Flux	1129lm	2	0.95	800		
Fixture Flux	806lm	3	1.43	355		
Efficacy	92lm/W	4	1.91	200		
TS1073	I _{max} =2834cd/klm	I _{max}	3199cd	5	2.38	128


MEDIUM WIDE FLOOD



	2700K	H(m)	D(m)	E _{max} (lx)		
	Ra90		42°			
Fixture Power	9W	1	0.76	1759		
Source Flux	1085lm	2	1.52	440		
Fixture Flux	802lm	3	2.28	195		
Efficacy	91lm/W	4	3.04	110		
TS1074	I _{max} =1622cd/klm	I _{max}	1759cd	5	3.80	70



	4000K	H(m)	D(m)	E _{max} (lx)		
	Ra90		42°			
Fixture Power	9W	1	0.76	1860		
Source Flux	1147lm	2	1.52	465		
Fixture Flux	848lm	3	2.28	207		
Efficacy	96lm/W	4	3.04	116		
TS1074	I _{max} =1622cd/klm	I _{max}	1860cd	5	3.80	74



	3000K	H(m)	D(m)	E _{max} (lx)		
	Ra90		42°			
Fixture Power	9W	1	0.76	1831		
Source Flux	1129lm	2	1.52	458		
Fixture Flux	835lm	3	2.28	203		
Efficacy	95lm/W	4	3.04	114		
TS1074	I _{max} =1622cd/klm	I _{max}	1831cd	5	3.80	73